Sewcraftly
SEWING PATTERNS

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 80, Waist: 63.5, Hips: 87.75
SIZE 00

Notes

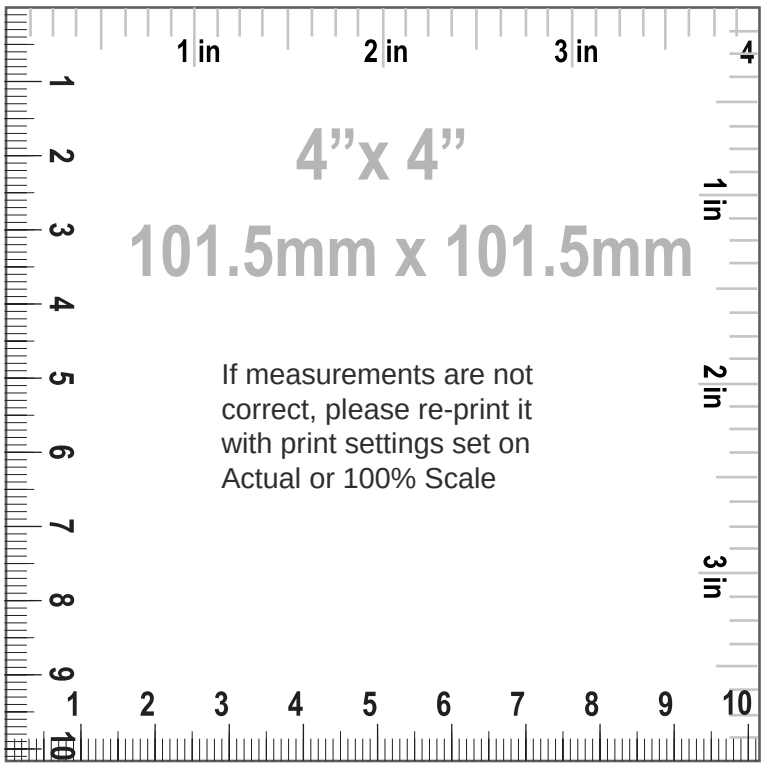

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

Thank you for your purchase!
This pattern is for personal use only. Please do not share, copy or resell it.
© Sewcraftly

SIZE 00
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "SLEEVE", MAIN FABRIC: Cut 2
9. "SLEEVE LINING", LINING: Cut 2
10. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
11. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
13. "WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
14. "INNER POCKET BAG", LINING: Cut 2
15. "OUTER POCKET BAG", MAIN FABRIC: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 11.00 cm (4 3/8 in)
7. Waist to pocket length 10.80 cm (4 1/4 in)
8. Side seam pocket position 1.77 cm (3/4 in)
9. Pocket width welt 3.00 cm (1 1/8 in)
10. Front exposed 10mm zipper length 33.29 cm (13 1/8 in)
11. Front length from HPS to hem 46.95 cm (18 1/2 in)
12. Across chest 43.99 cm (17 3/8 in)
13. Center front length to hem 33.29 cm (13 1/8 in)
14. Center back length to hem 46.60 cm (18 3/8 in)
15. Across front 29.64 cm (11 5/8 in)

16. Across back 36.20 cm (14 1/4 in)
17. Across shoulders 37.81 cm (14 7/8 in)
18. Side seam 26.24 cm (10 3/8 in)
19. Waist 38.75 cm (15 1/4 in)
20. Low hips 49.38 cm (19 1/2 in)
21. Blazer hemline sweep 46.84 cm (18 1/2 in)
22. Armhole length 44.31 cm (17 1/2 in)
23. Neck opening 19.46 cm (7 5/8 in)
24. Front neck drop 13.69 cm (5 3/8 in)
25. Back neck drop 3.89 cm (1 1/2 in)
26. Shoulder width 12.08 cm (4 3/4 in)
27. Apex to apex 17.00 cm (6 3/4 in)
28. Stretch factor horizontal 1.00 none (3/8 in)
29. Stretch factor vertical 1.00 none (3/8 in)
30. Sleeve length 57.88 cm (22 3/4 in)
31. Sleeve upper arm width 29.08 cm (11 1/2 in)
32. Sleeve opening 23.04 cm (9 1/8 in)
33. Sleeve cap length 45.53 none (17 7/8 in)
34. Seam allowance poc max 3.00 none (1 1/8 in)
35. Pocket bag height 15.58 cm (6 1/8 in)
36. Stand height 3.00 cm (1 1/8 in)
37. Collar length 57.57 cm (22 5/8 in)
38. Front exposed 10mm zipper length 36.29 cm (14 1/4 in)

Sewcraftly
SEWING PATTERNS

Paper Size: A4;
Print Actual Size (100% Scale);

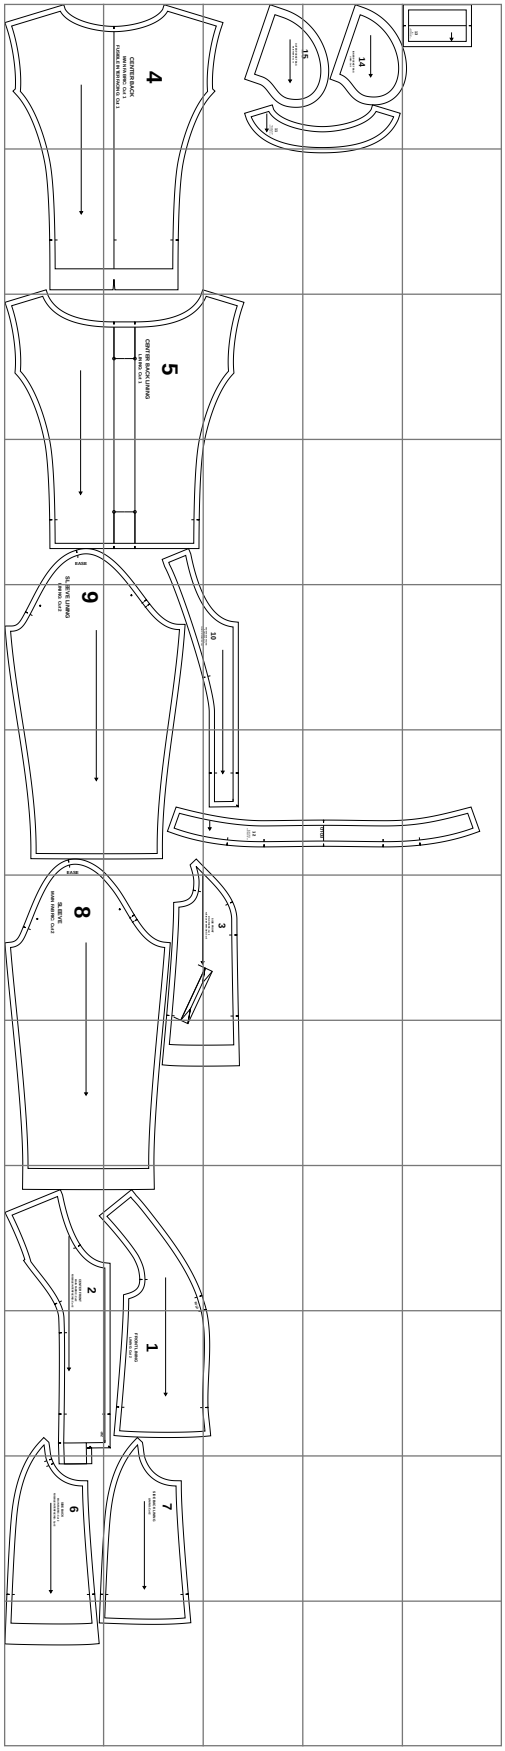

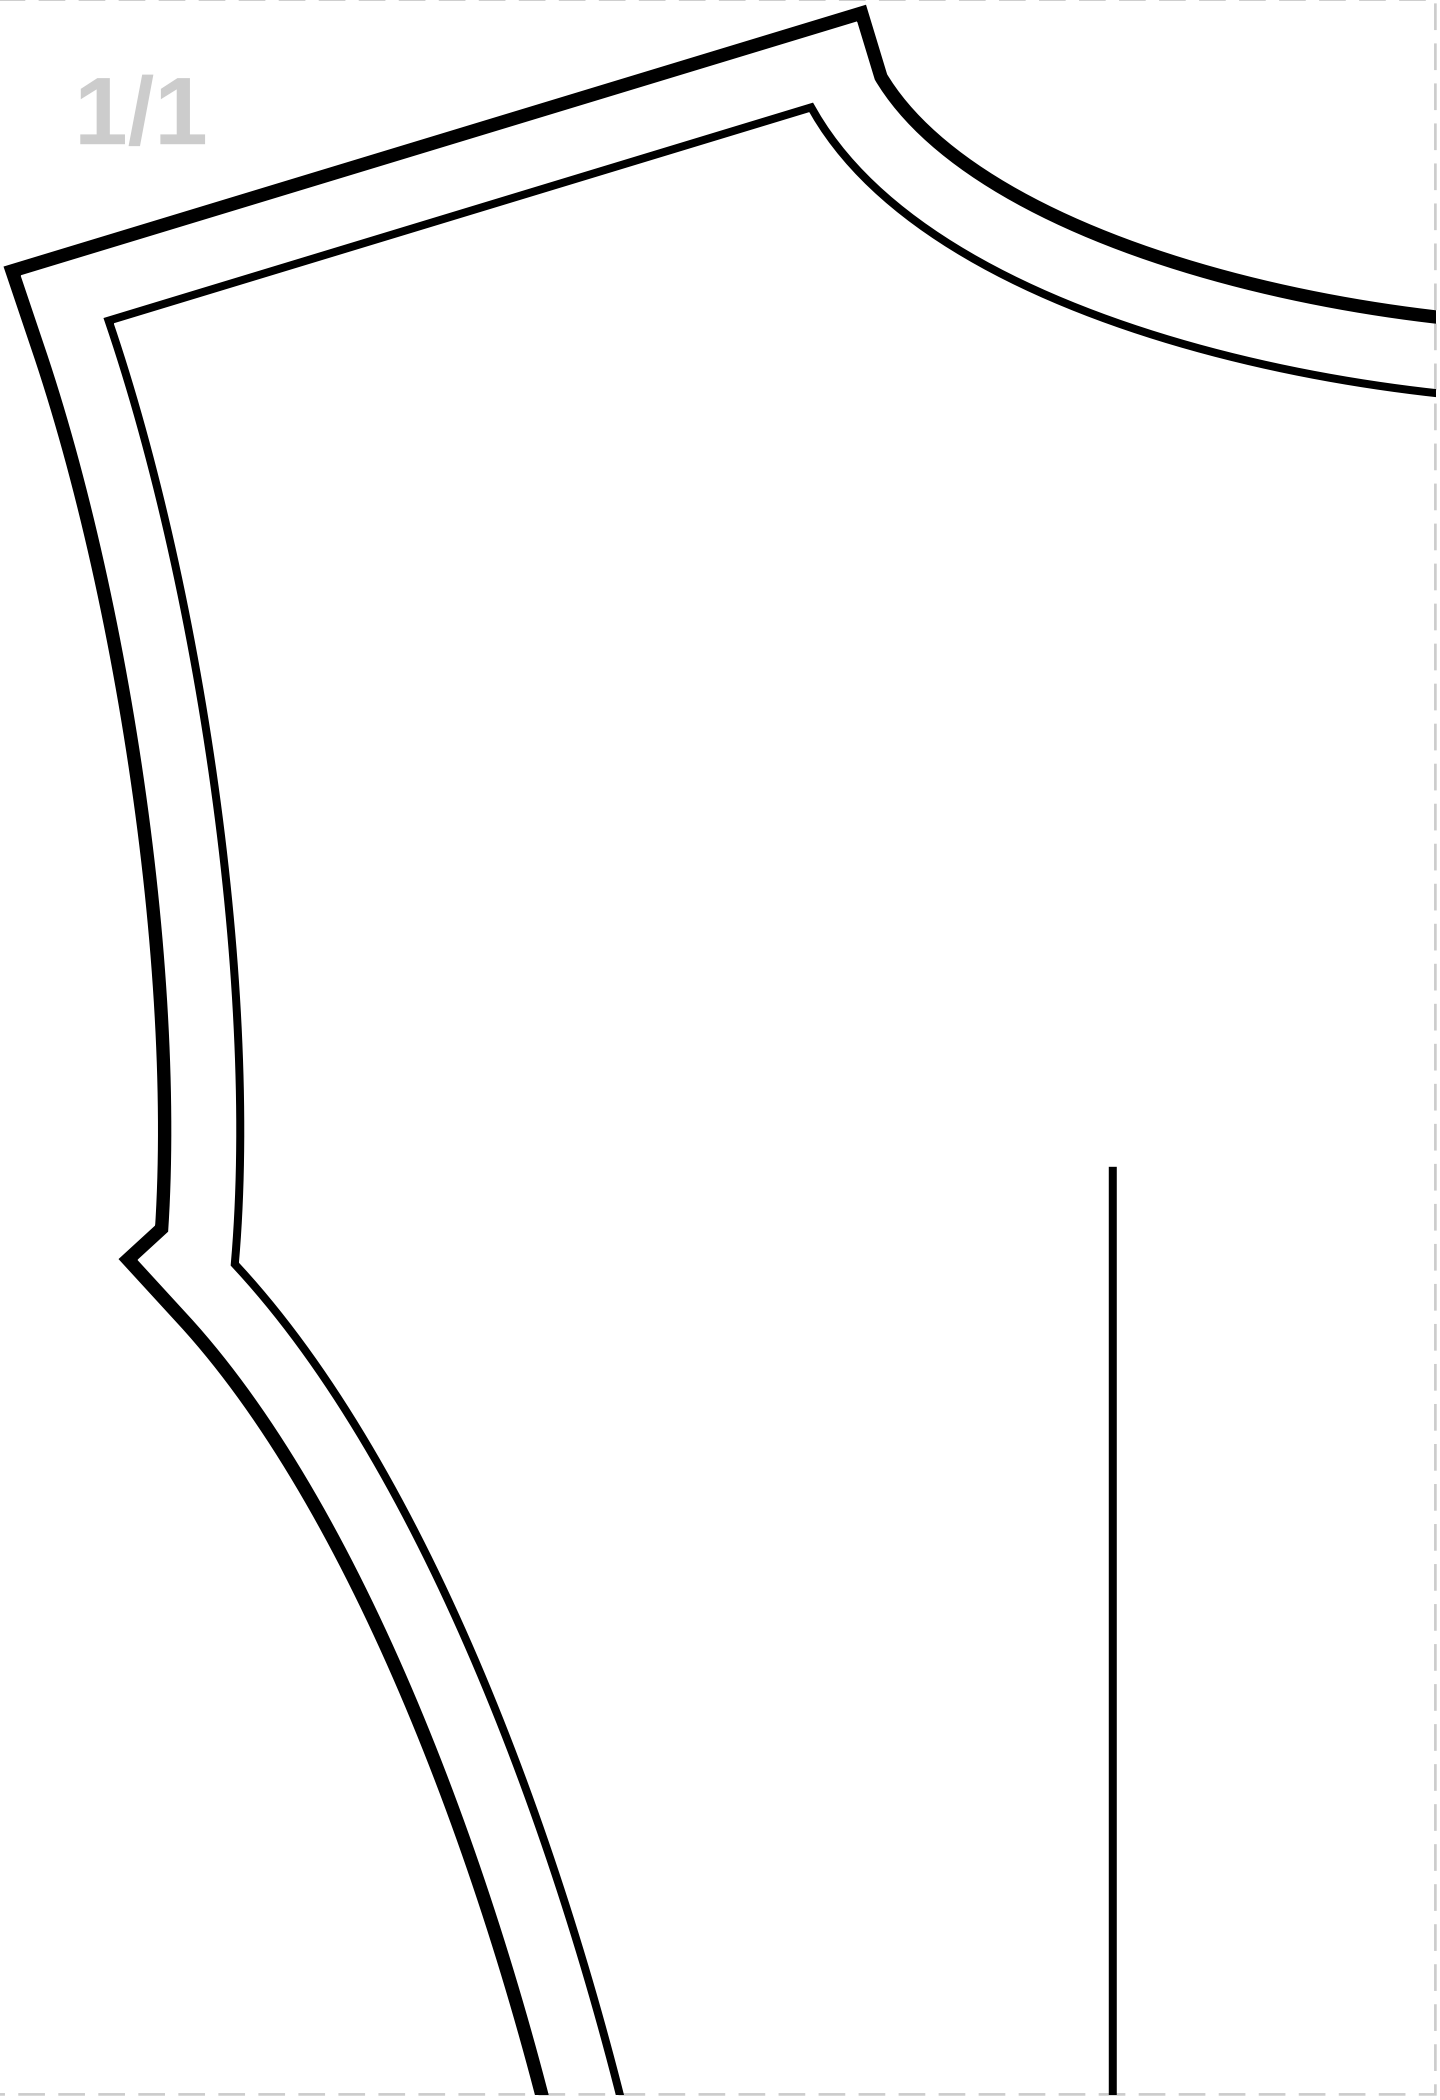

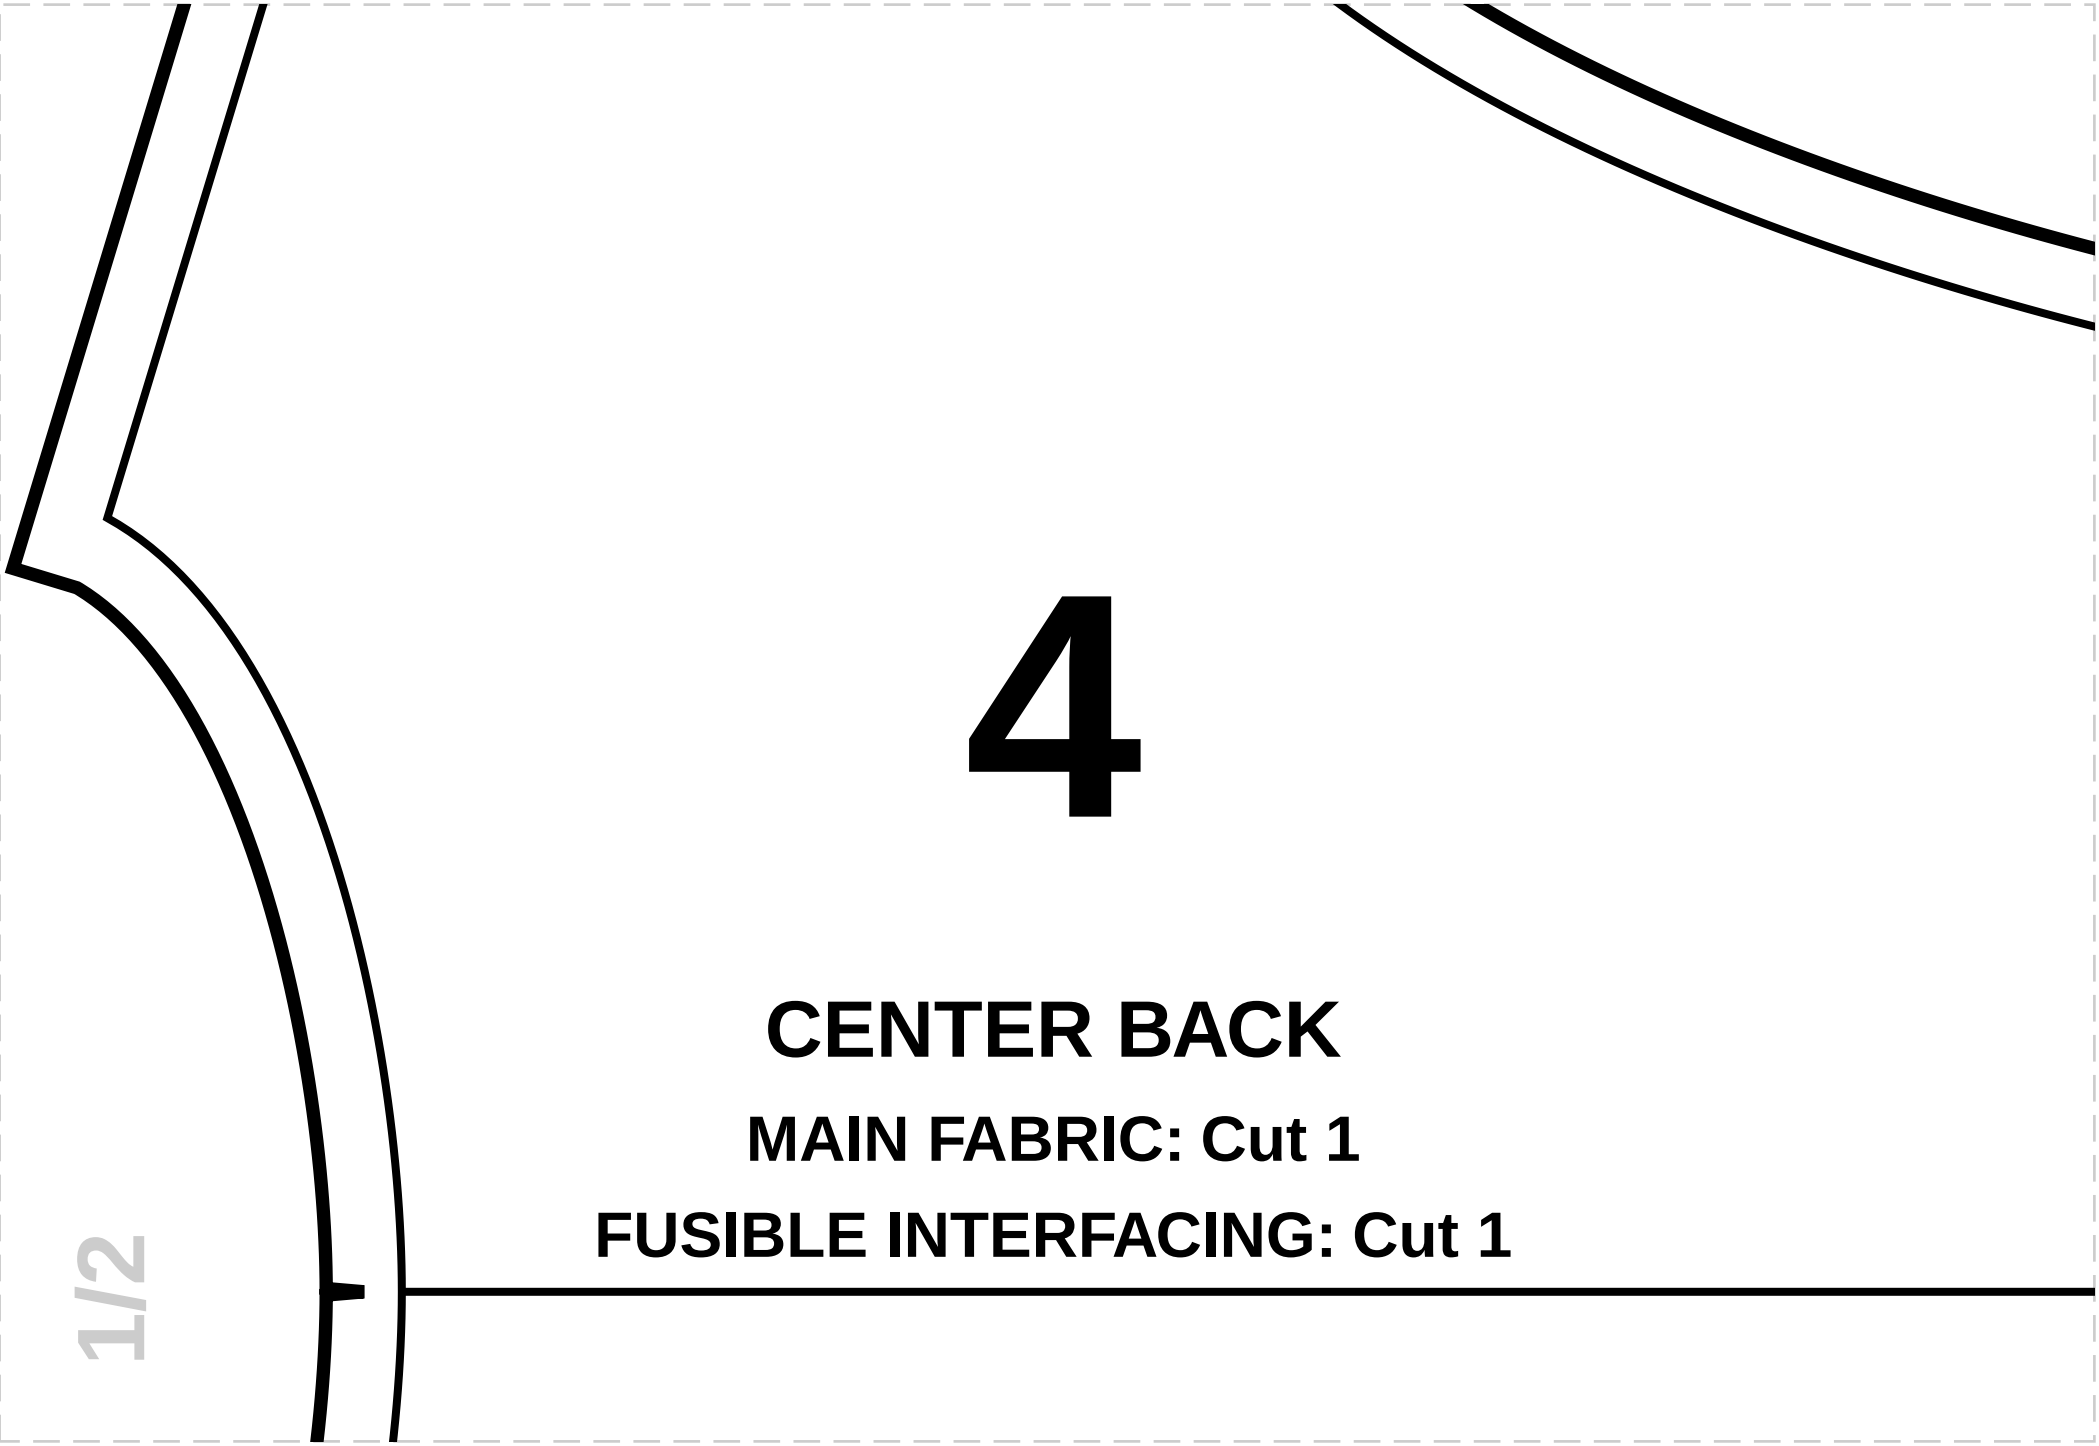

4

CENTER BACK

MAIN FABRIC: Cut 1

FUSIBLE INTERFACING: Cut 1

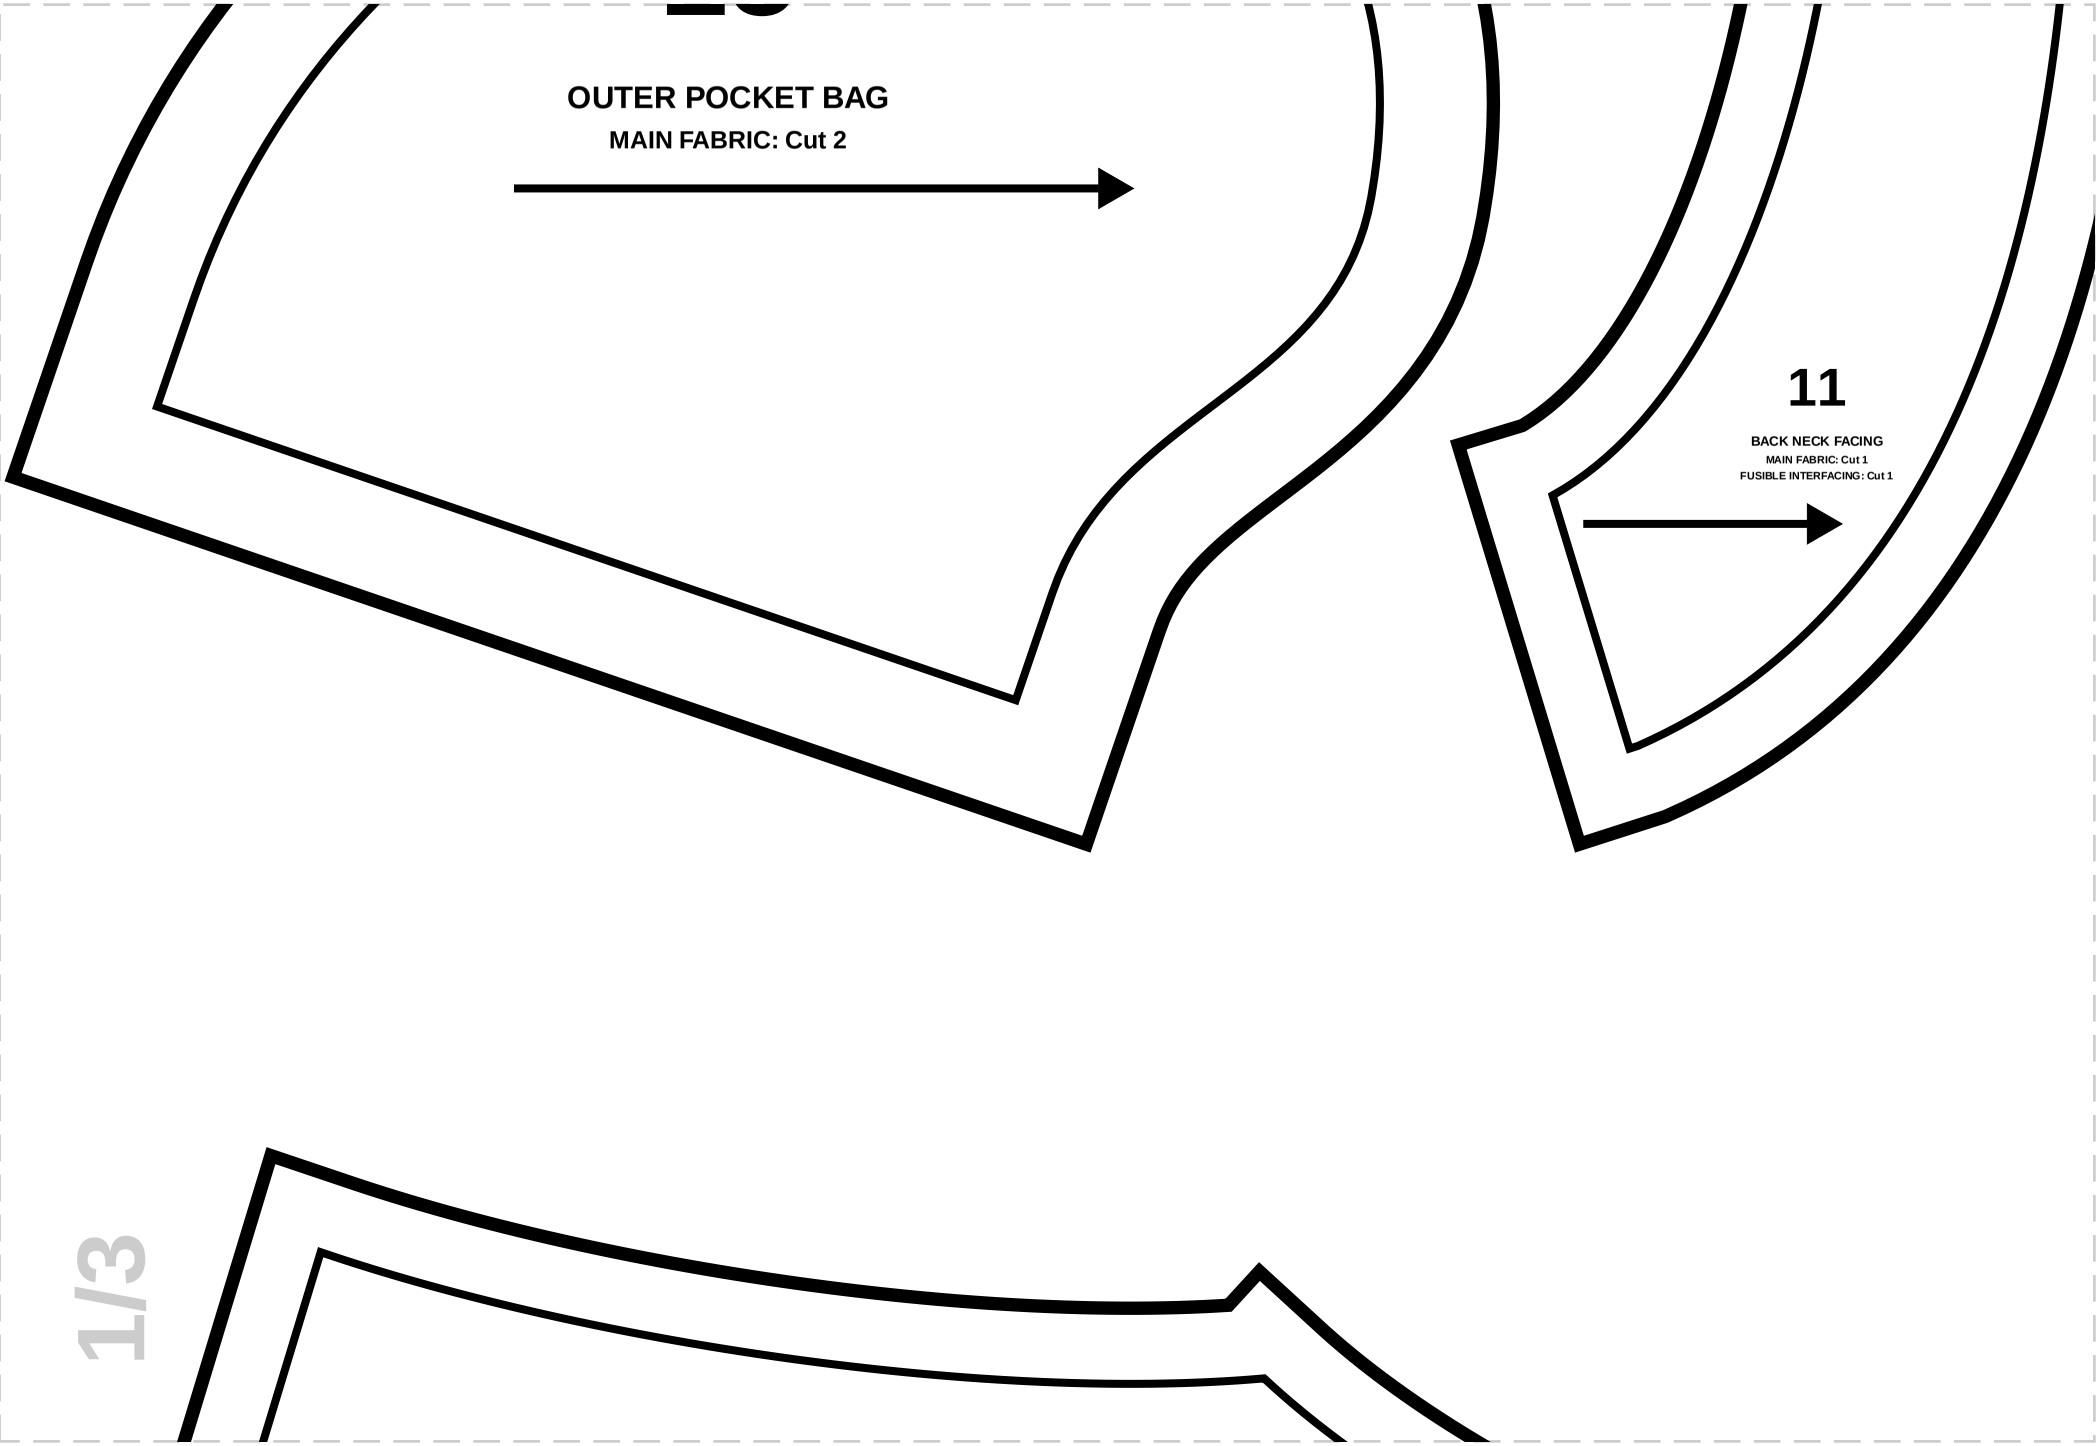
OUTER POCKET BAG
MAIN FABRIC: Cut 2
11
BACK NECK FACING
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: Cut 1

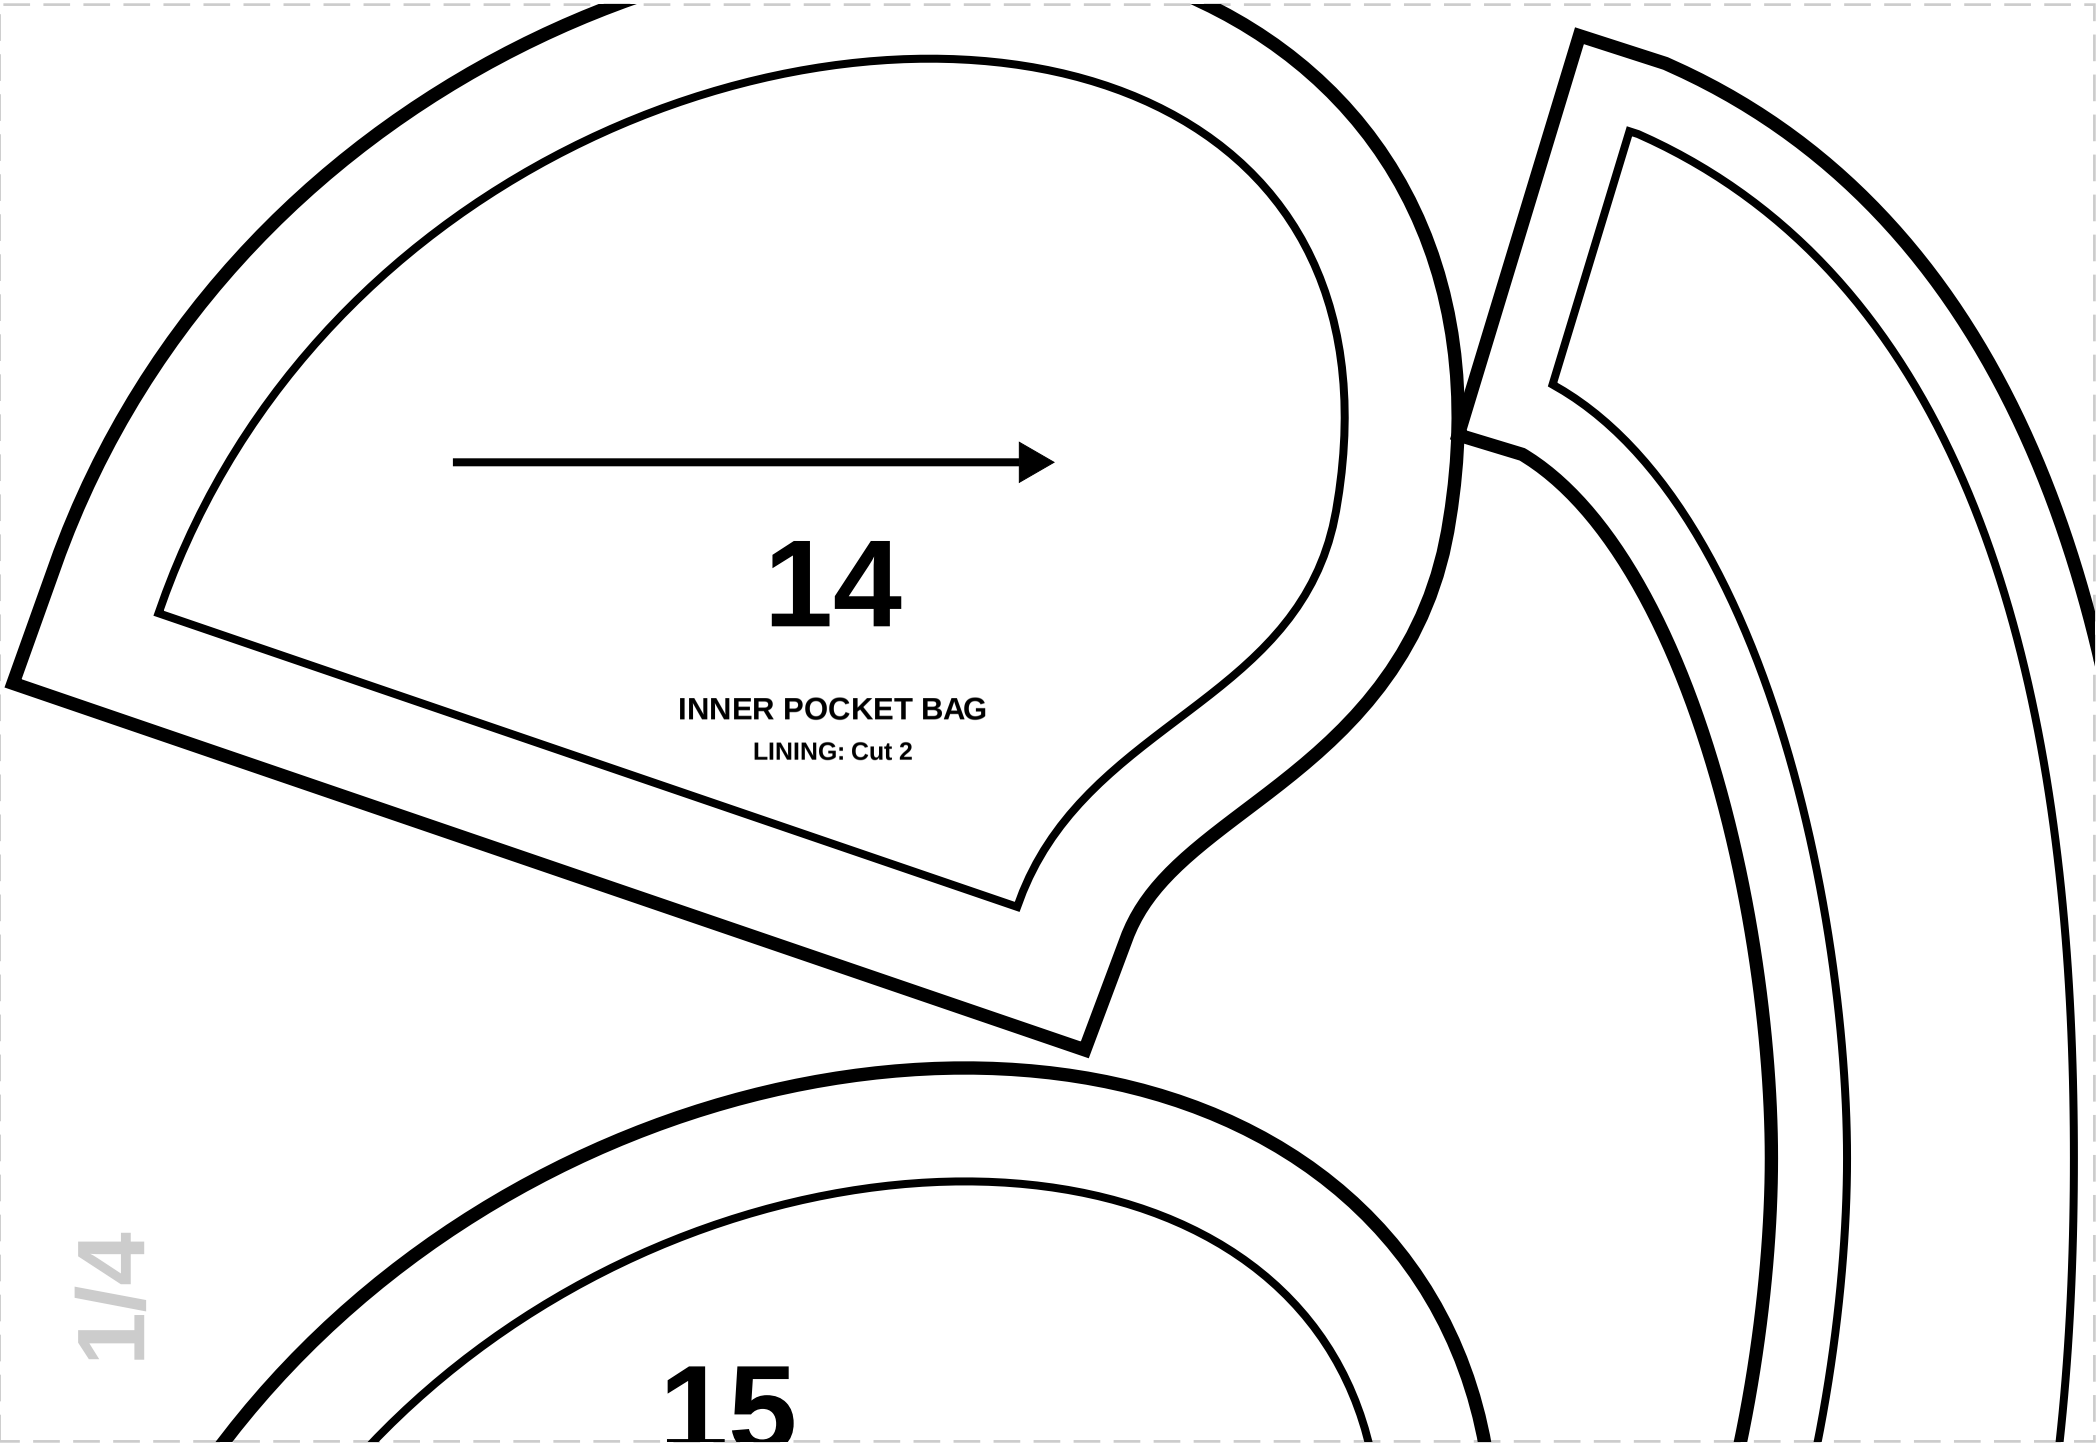
14
INNER POCKET BAG
LINING: Cut 2
15

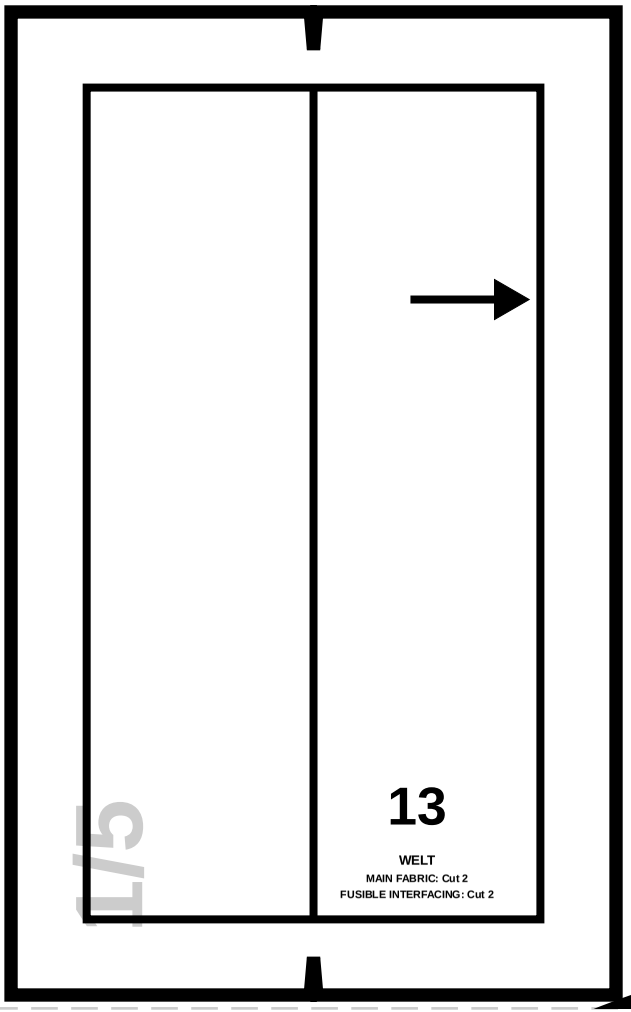
13
WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
L/S

2/1

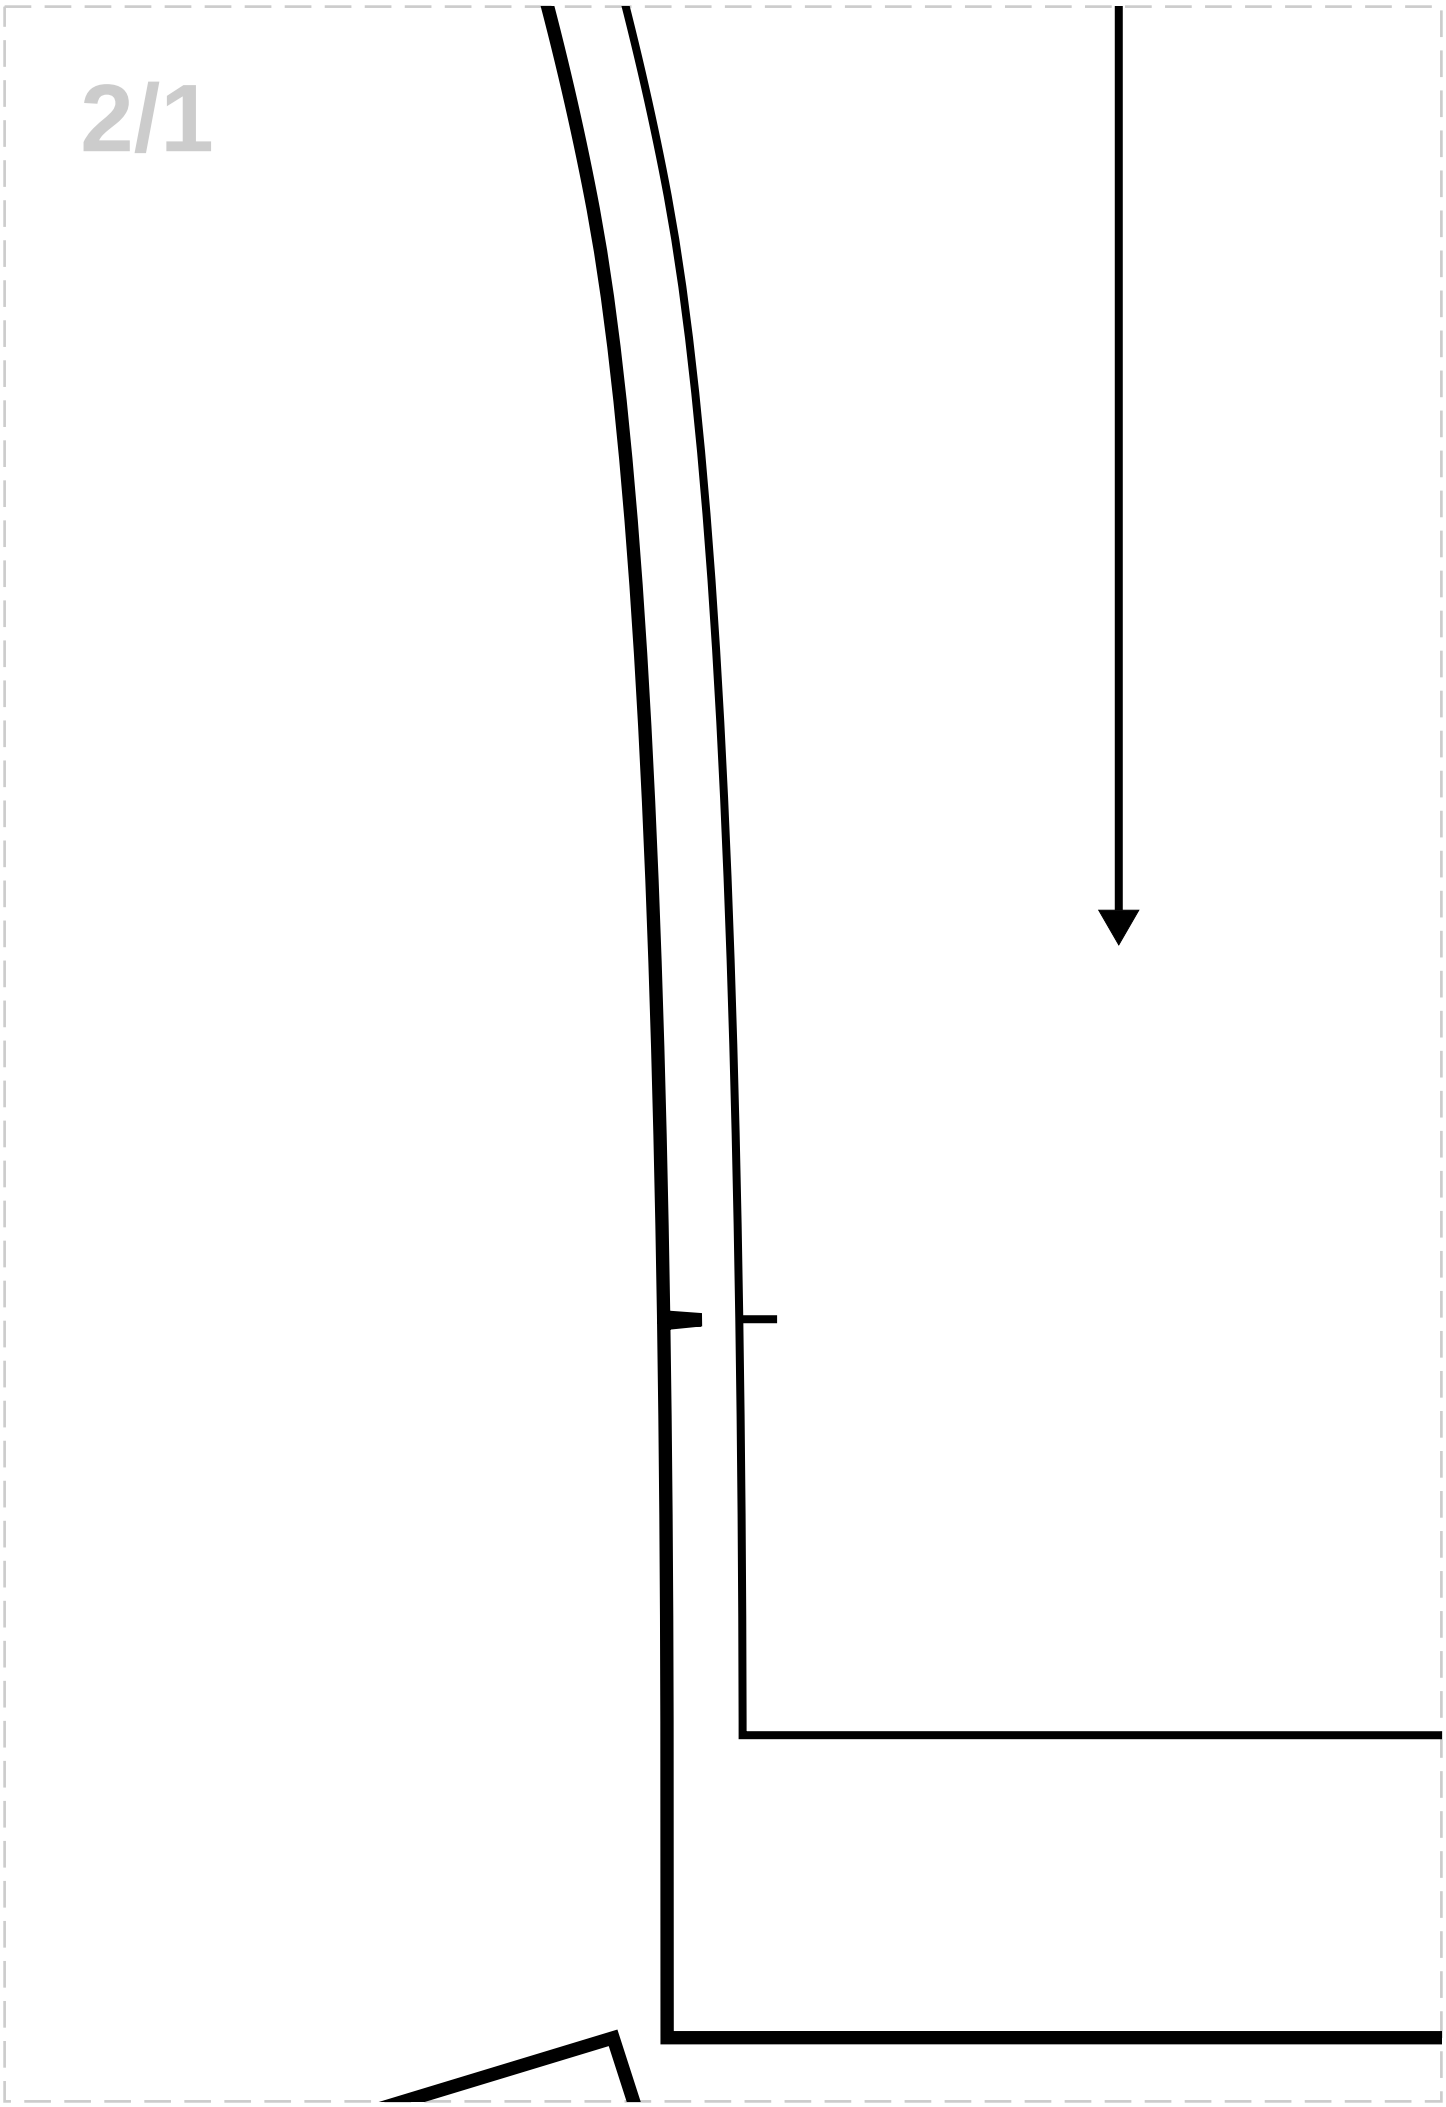

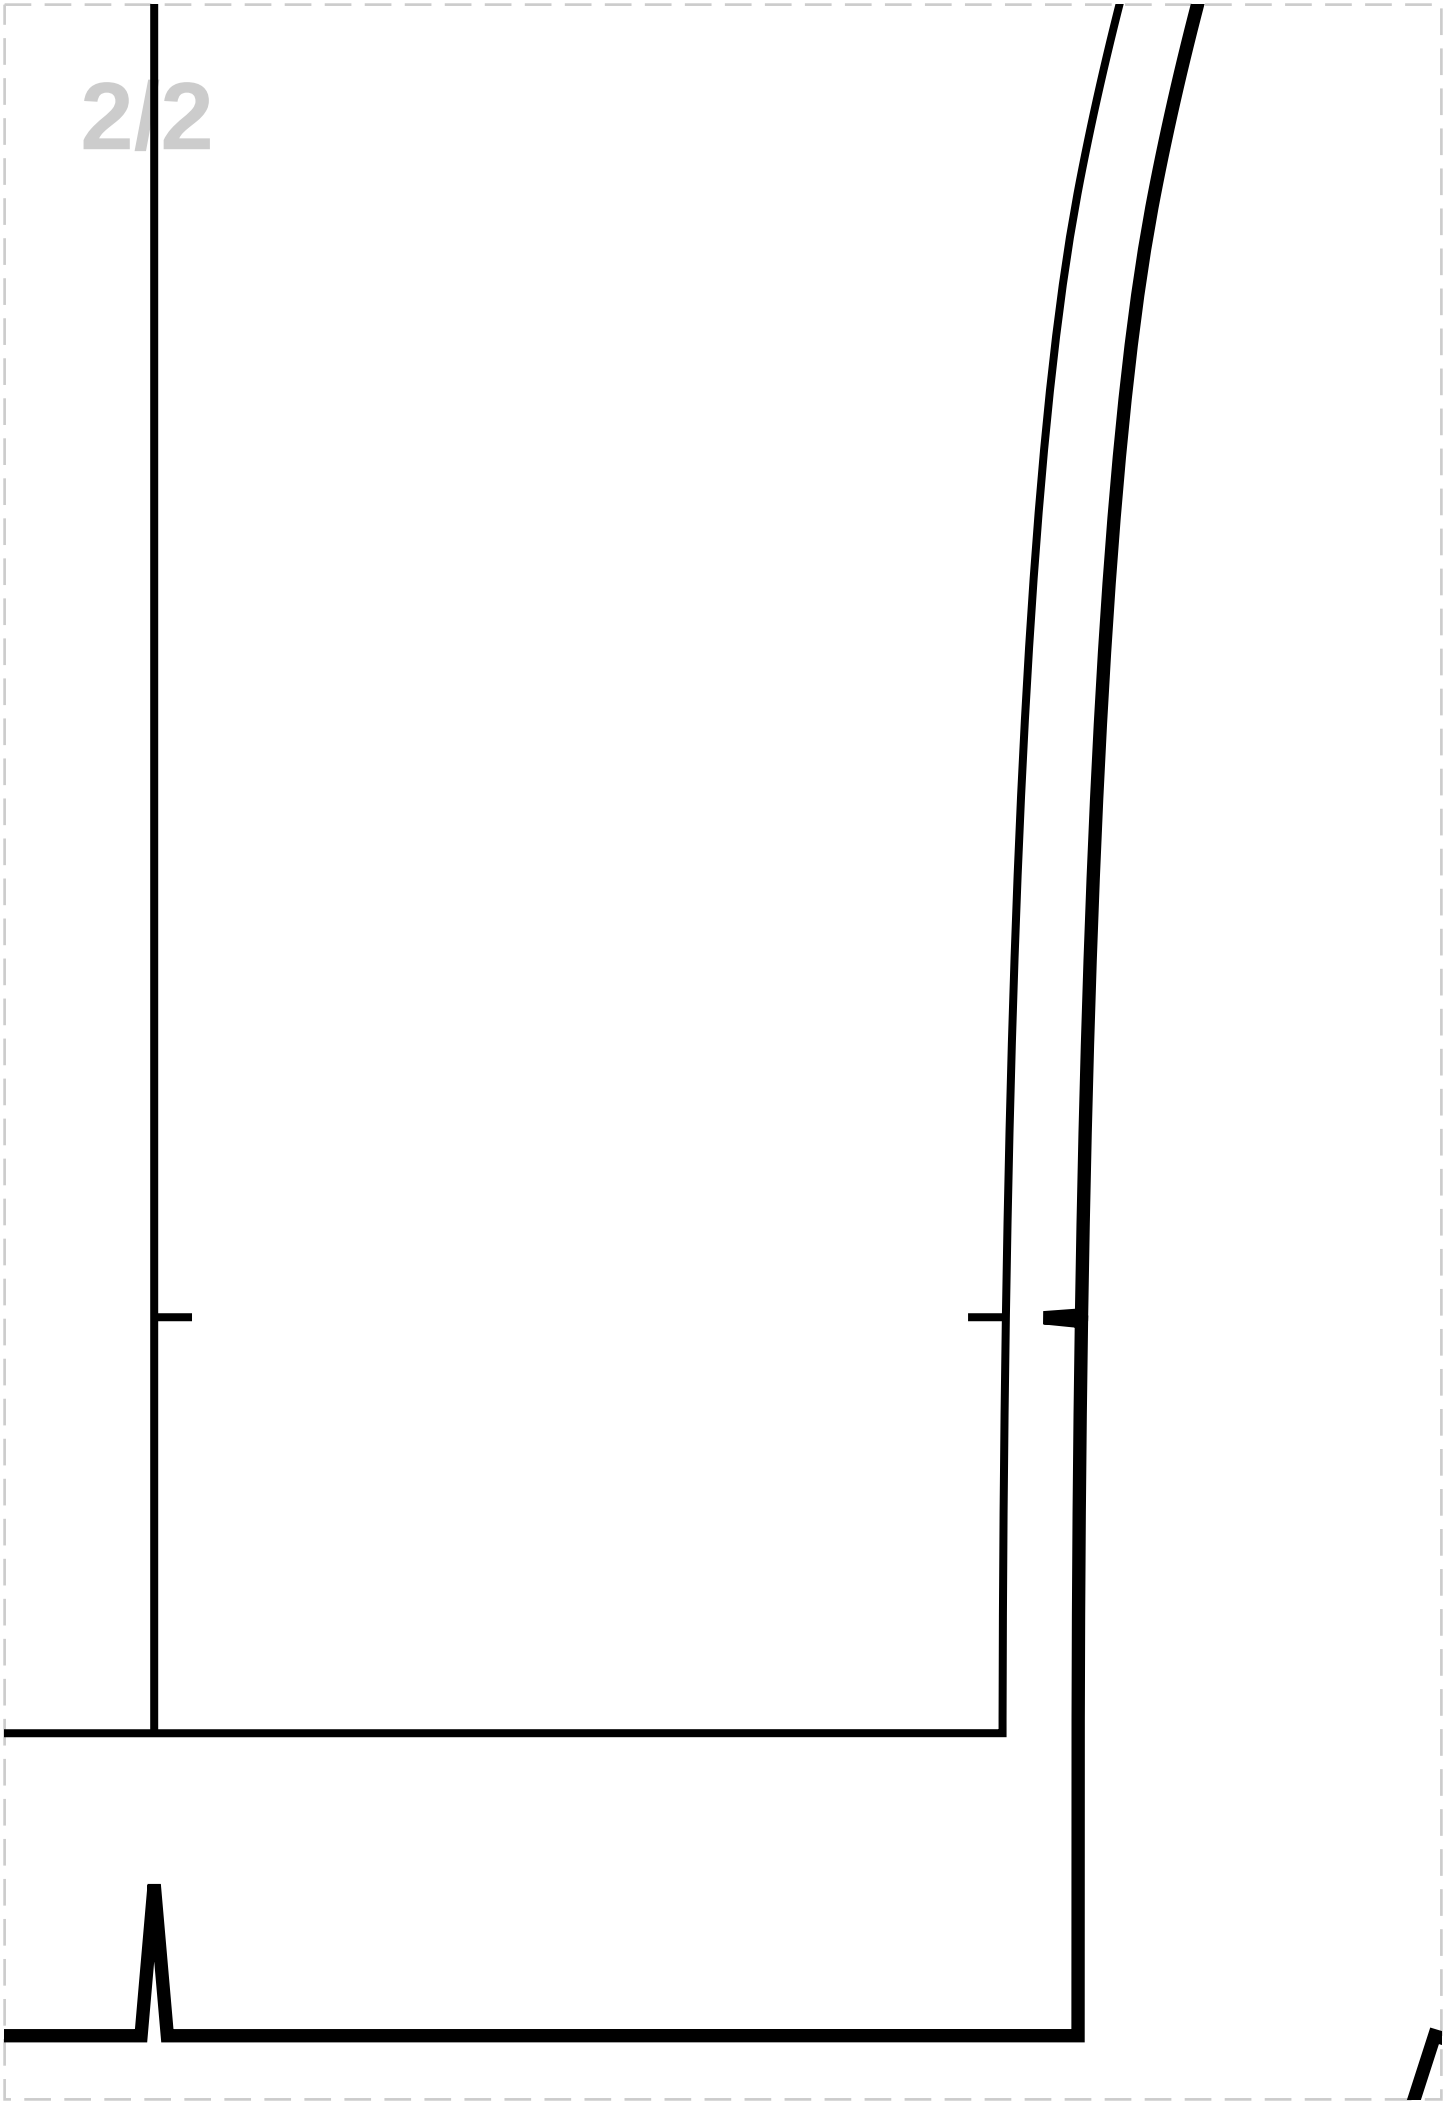

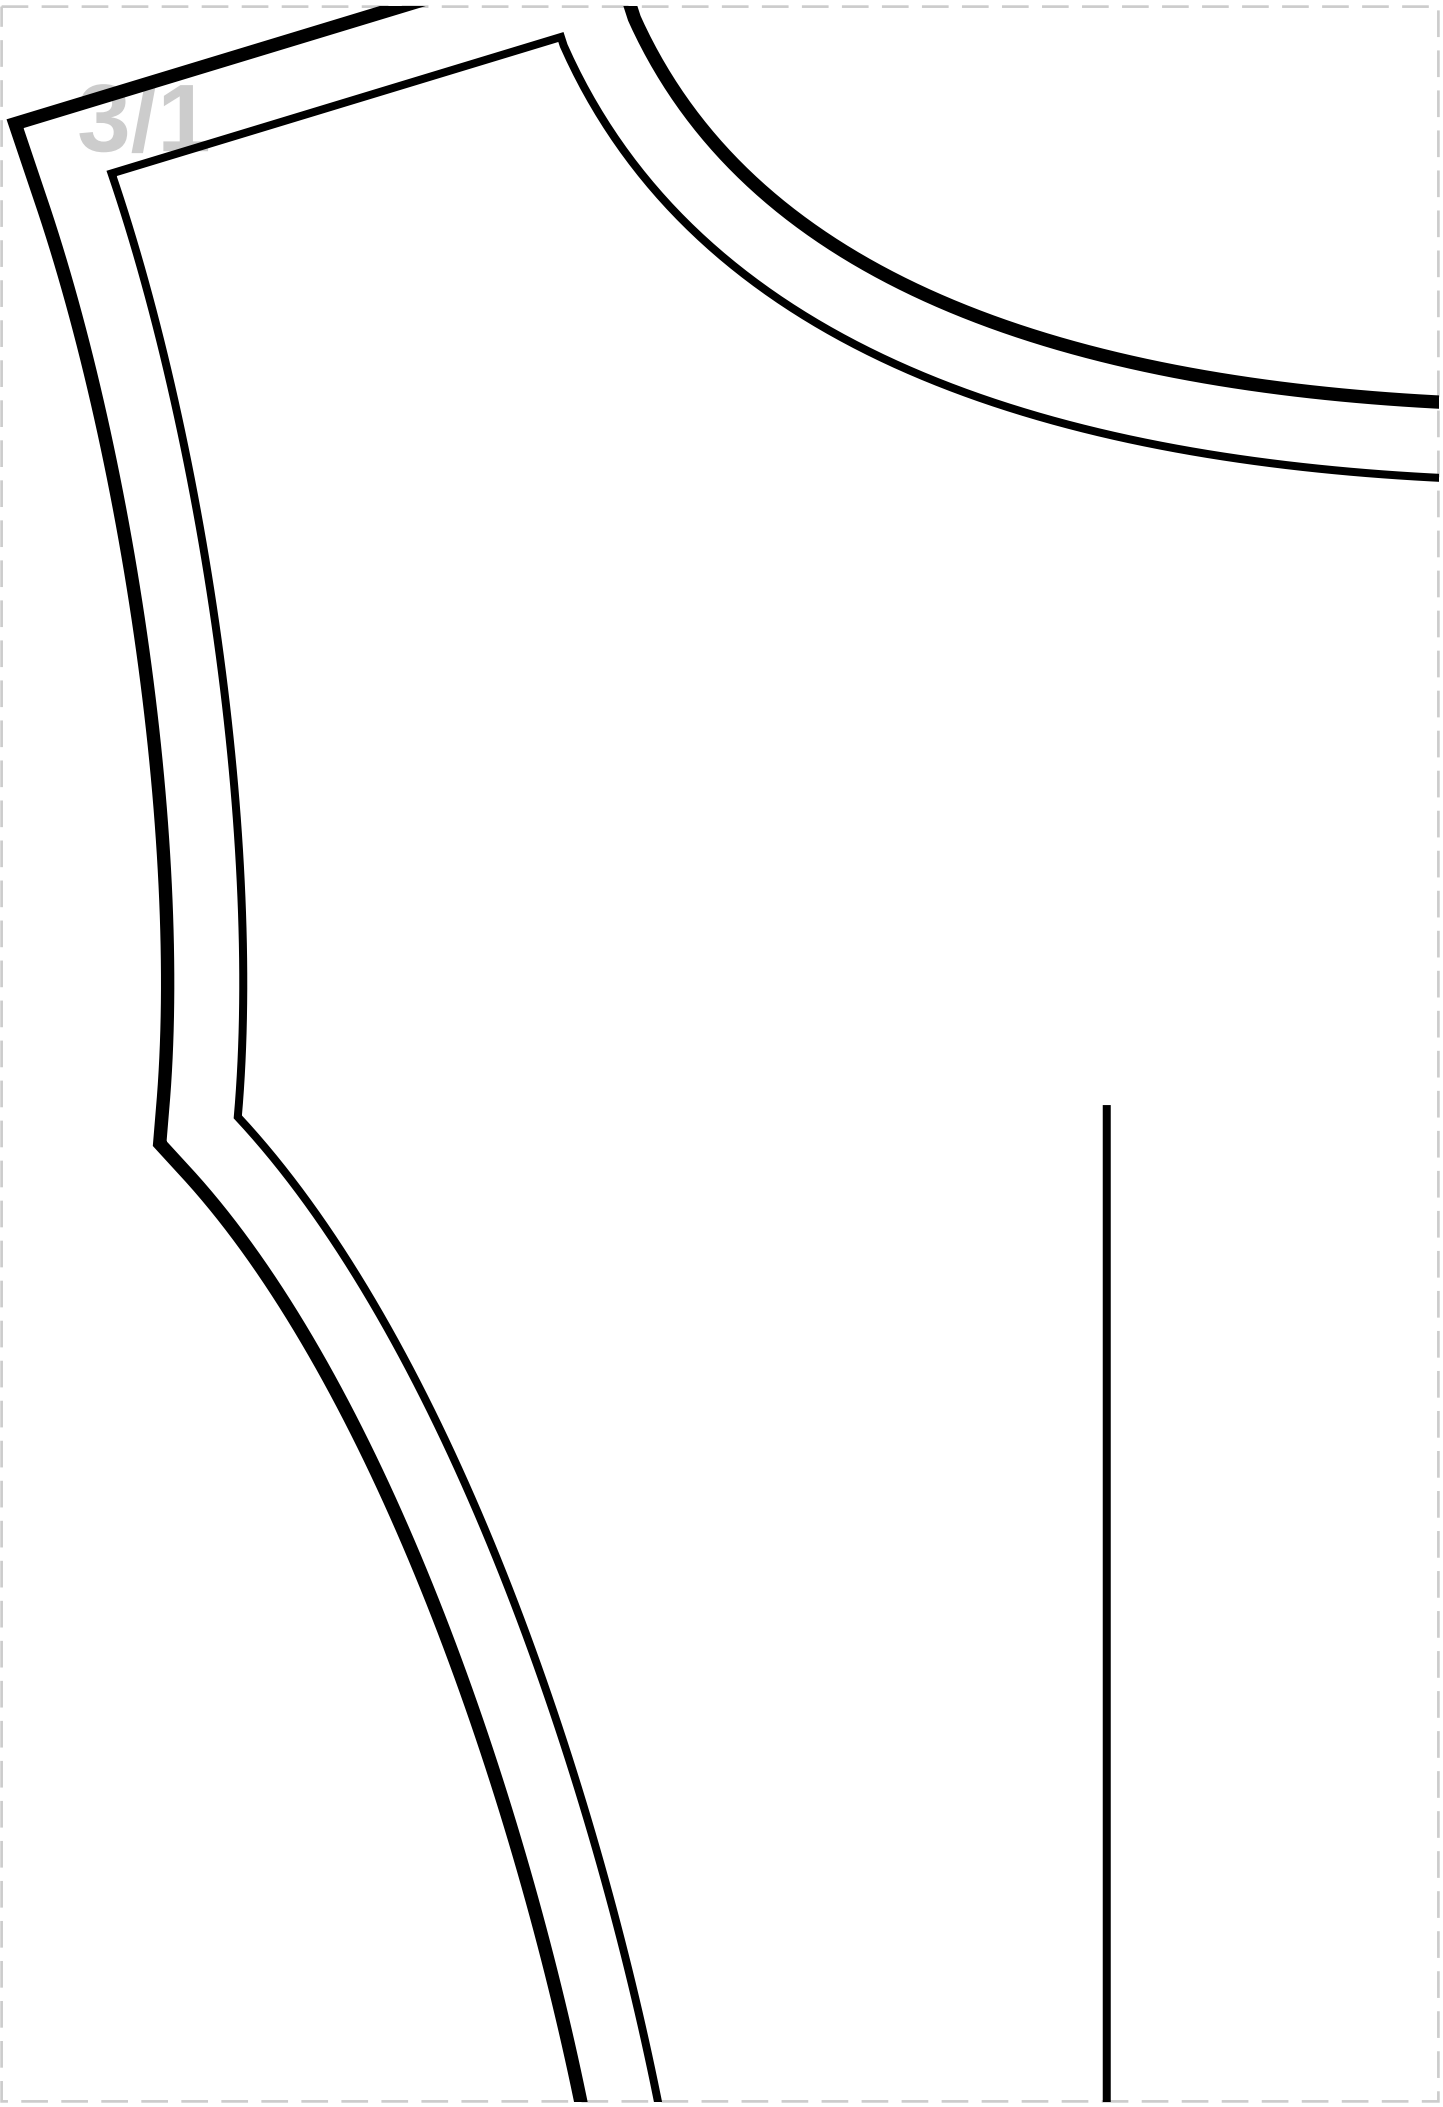
3/1

5

CENTER BACK LINING

LINING: Cut 1

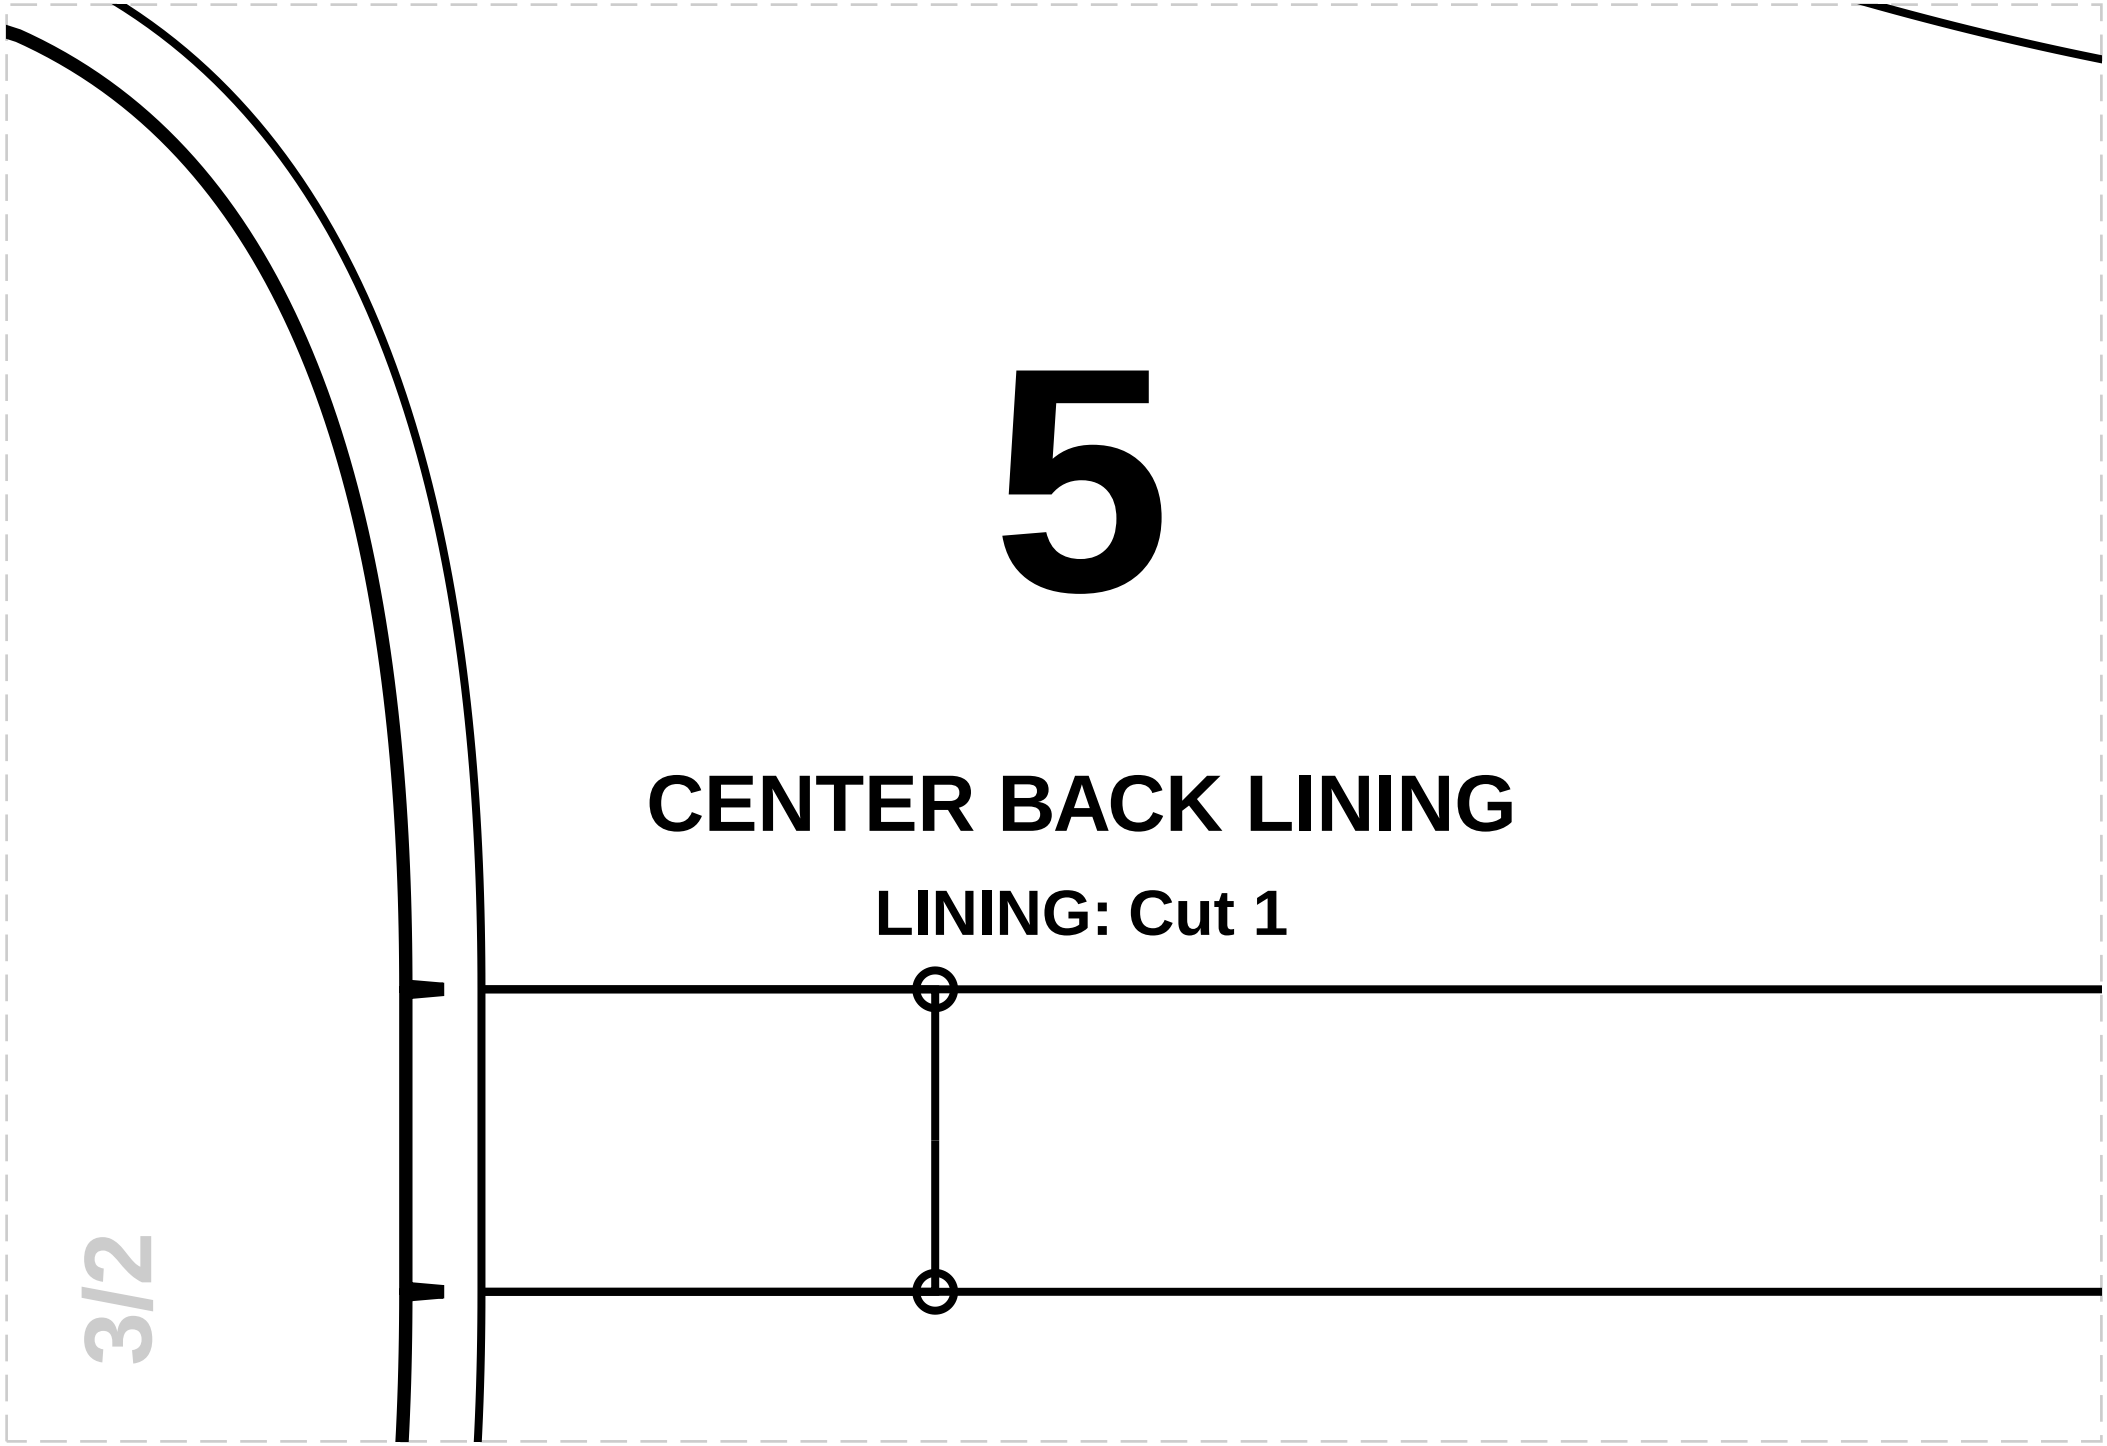

3/2

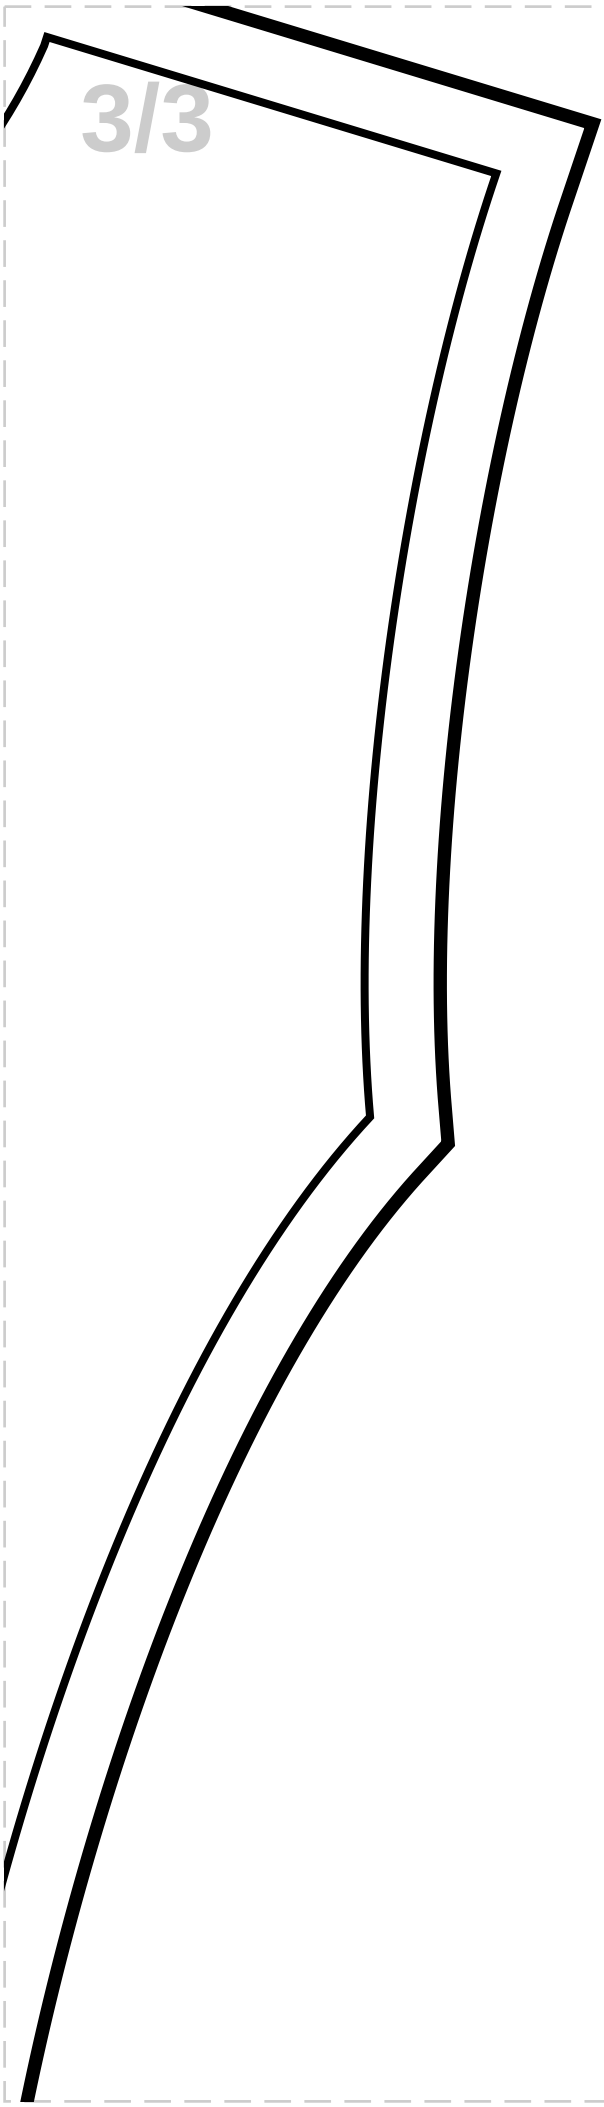

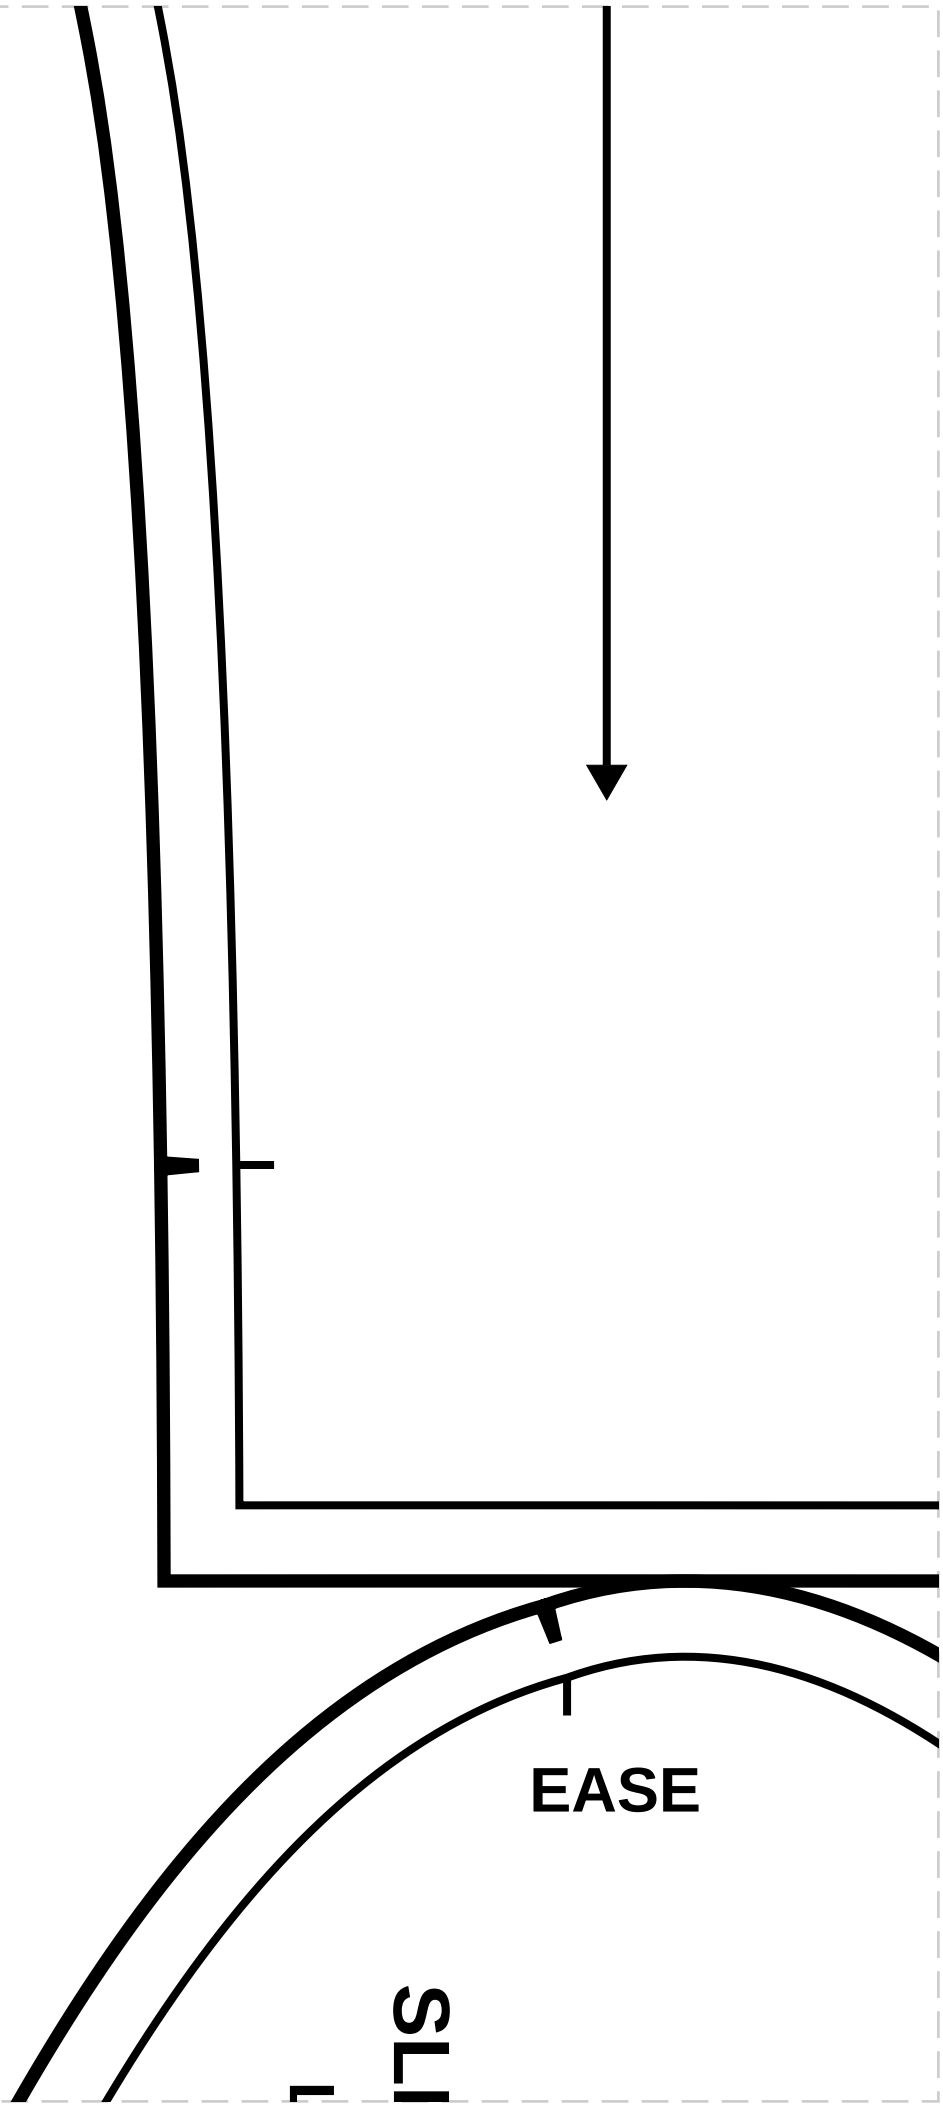
EASE
SLI

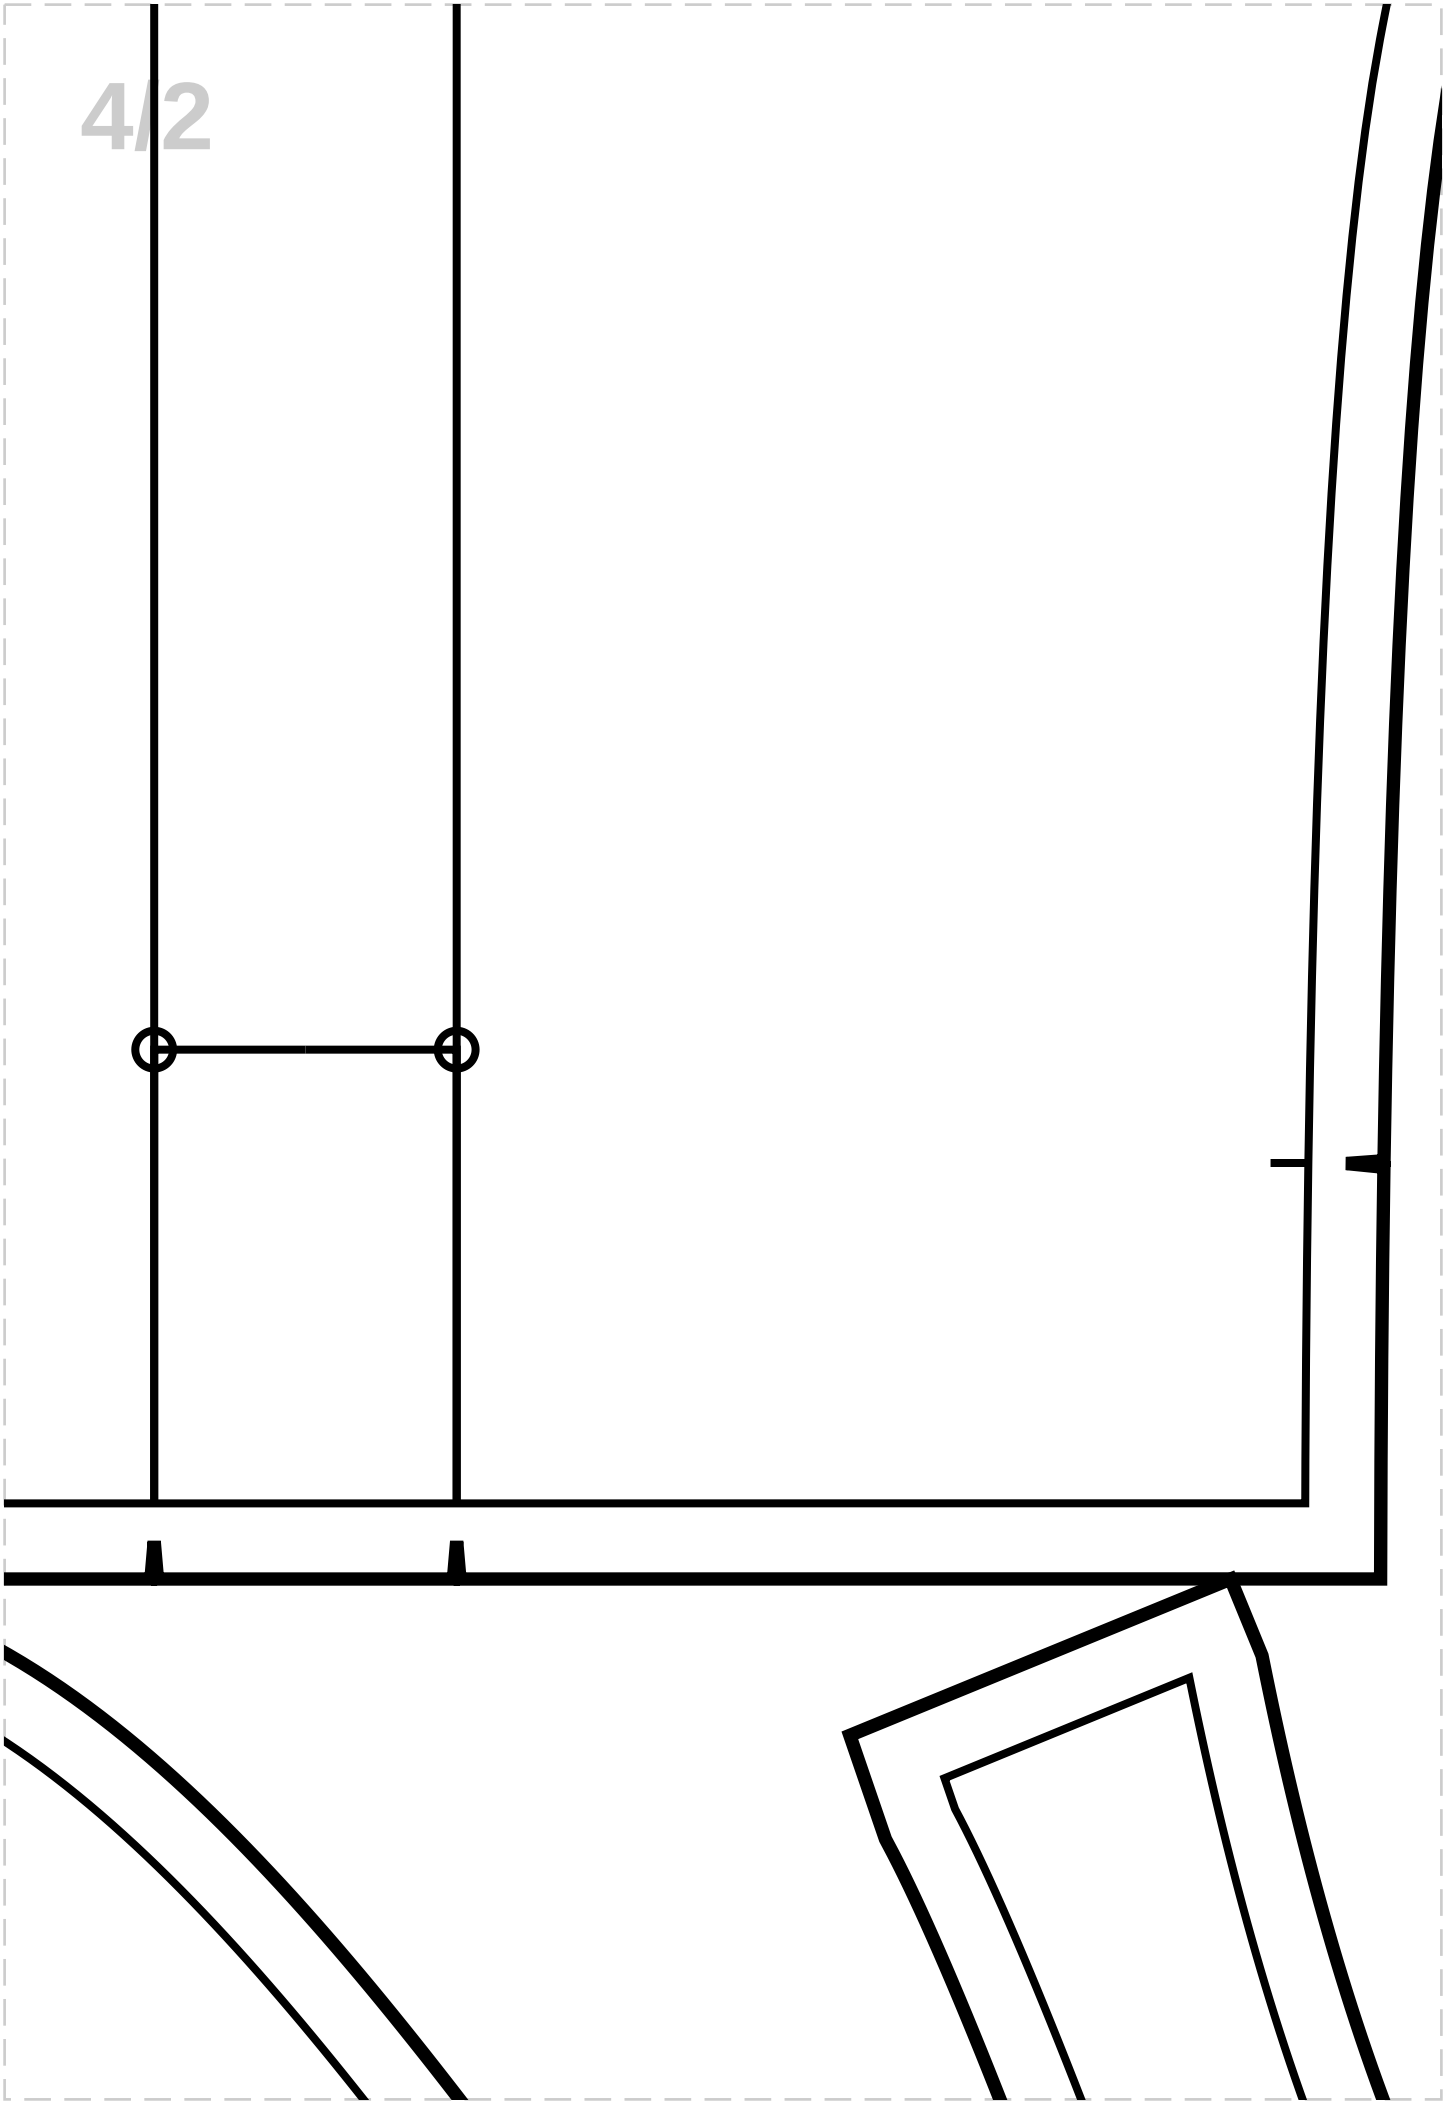

9

EEVE LINING

LINING: Cut 2

FUSIBLE INTERFACING: Cut 2

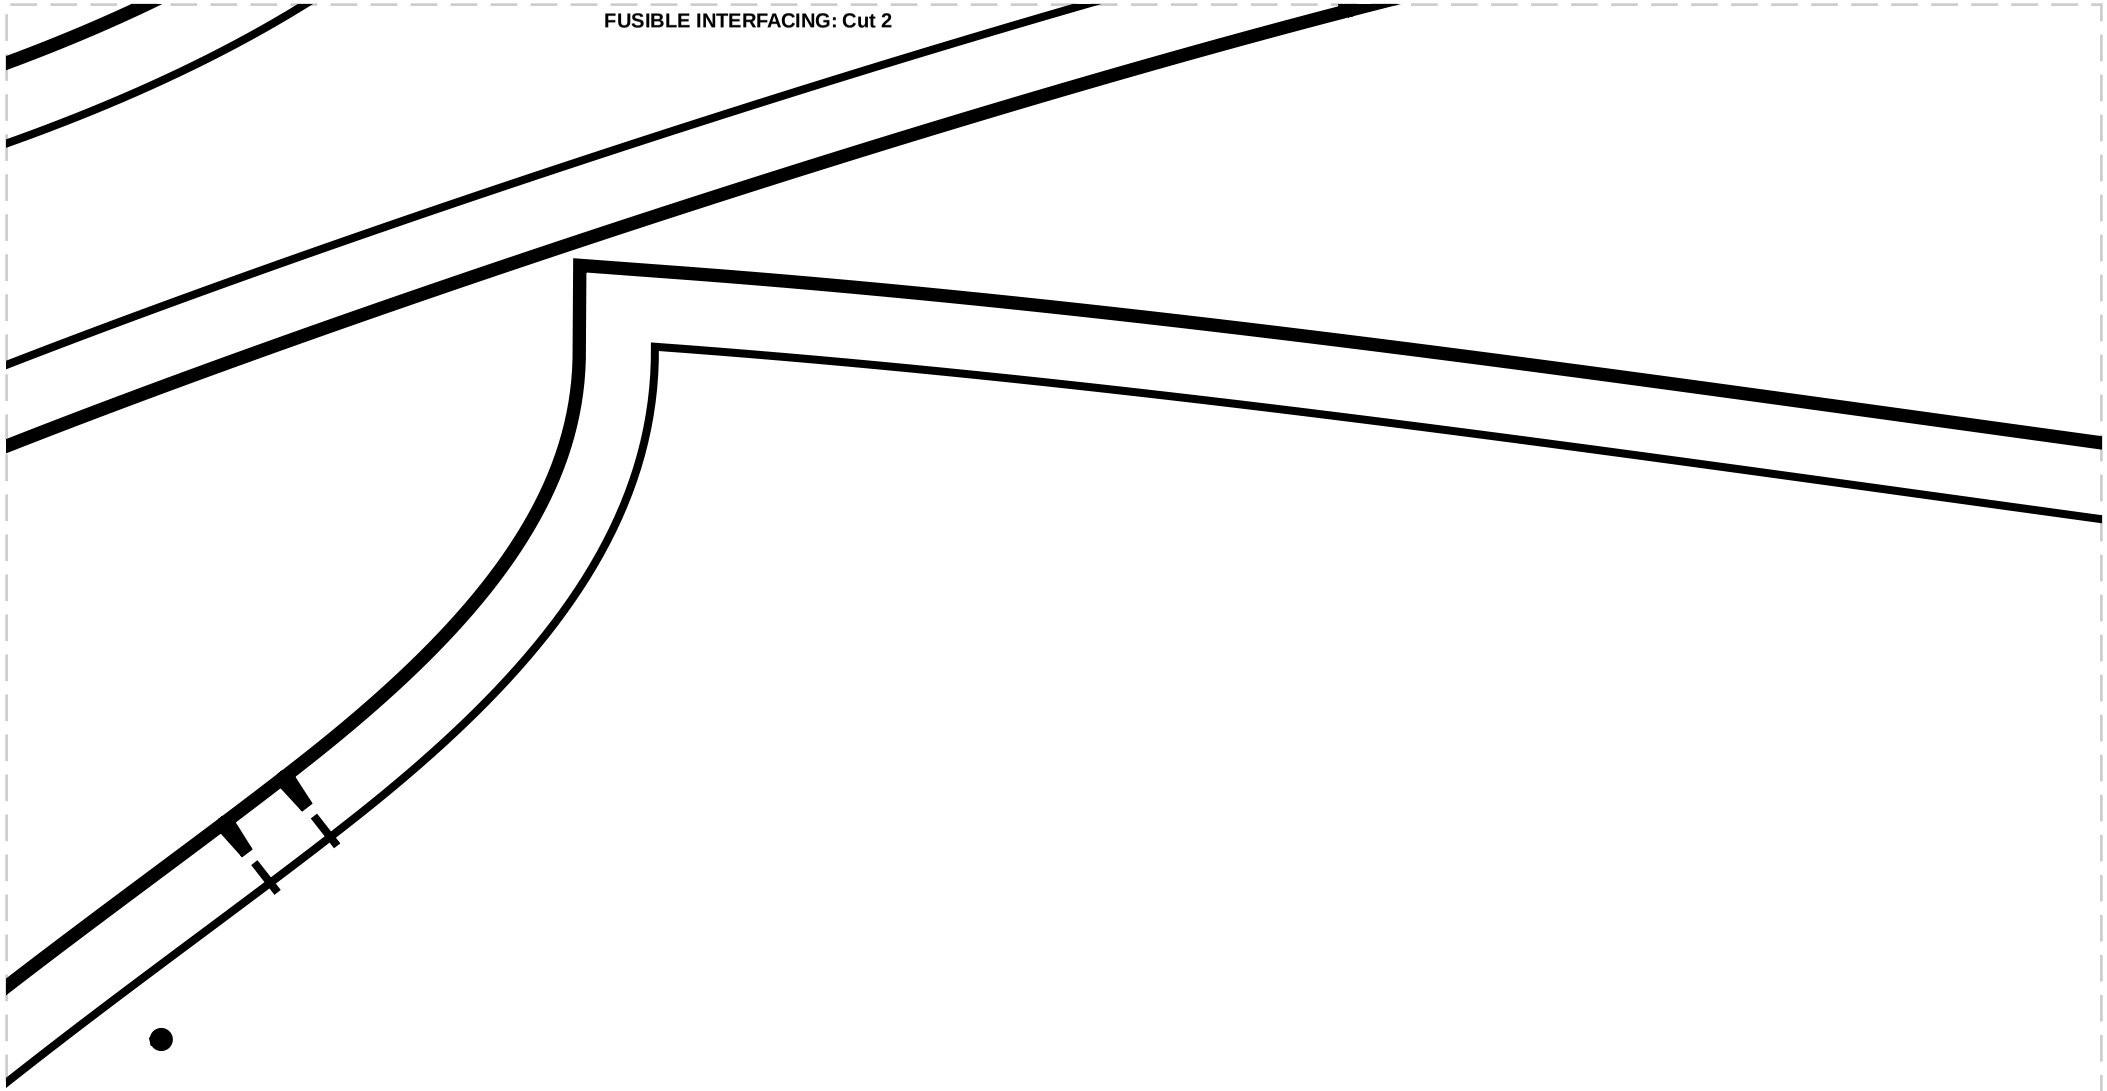

5/2

5/3

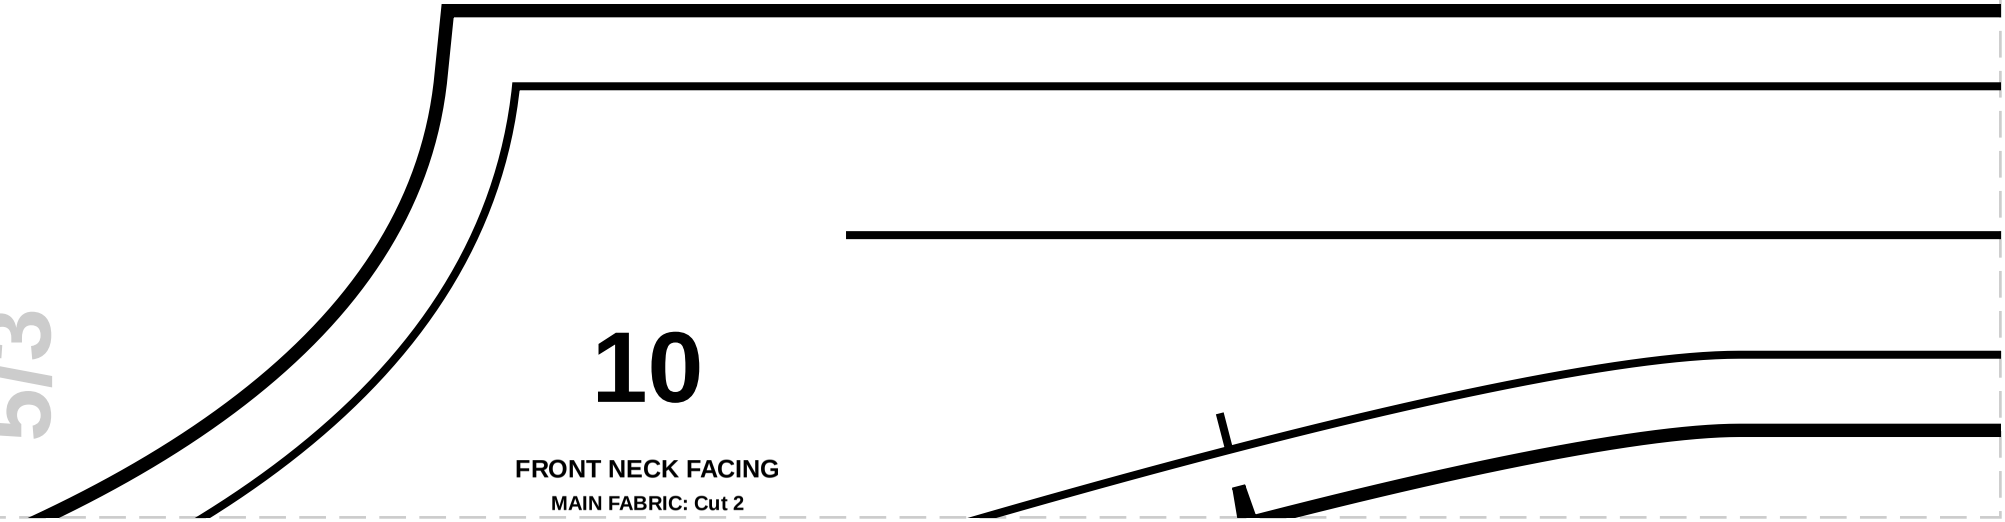

10

FRONT NECK FACING

MAIN FABRIC: Cut 2

5/4

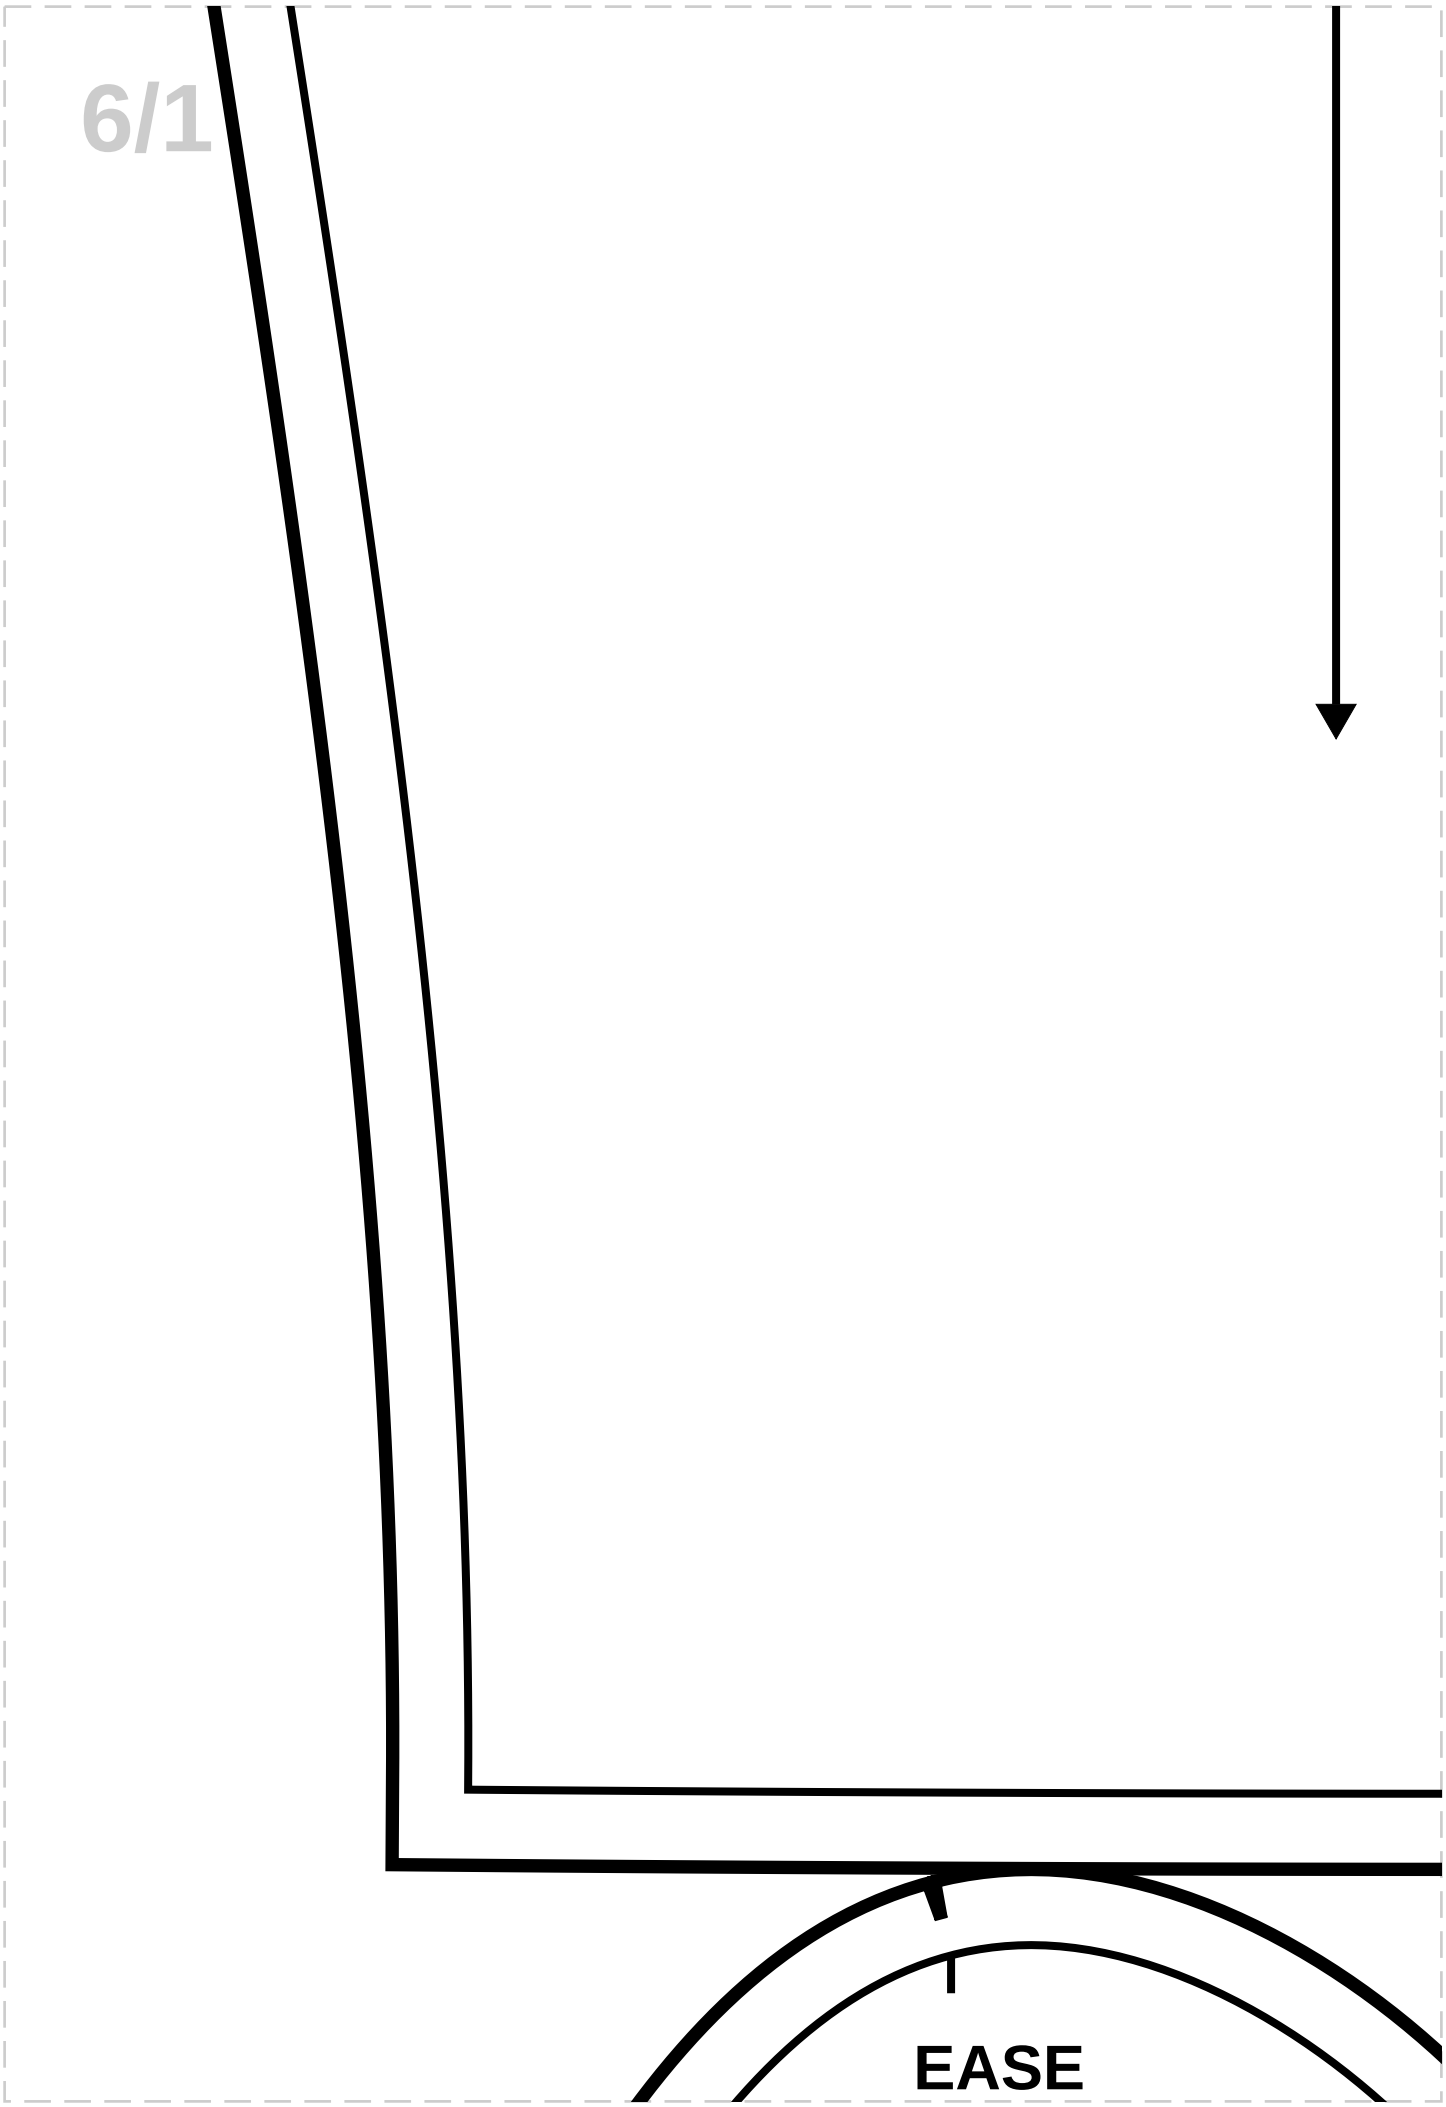
EASE

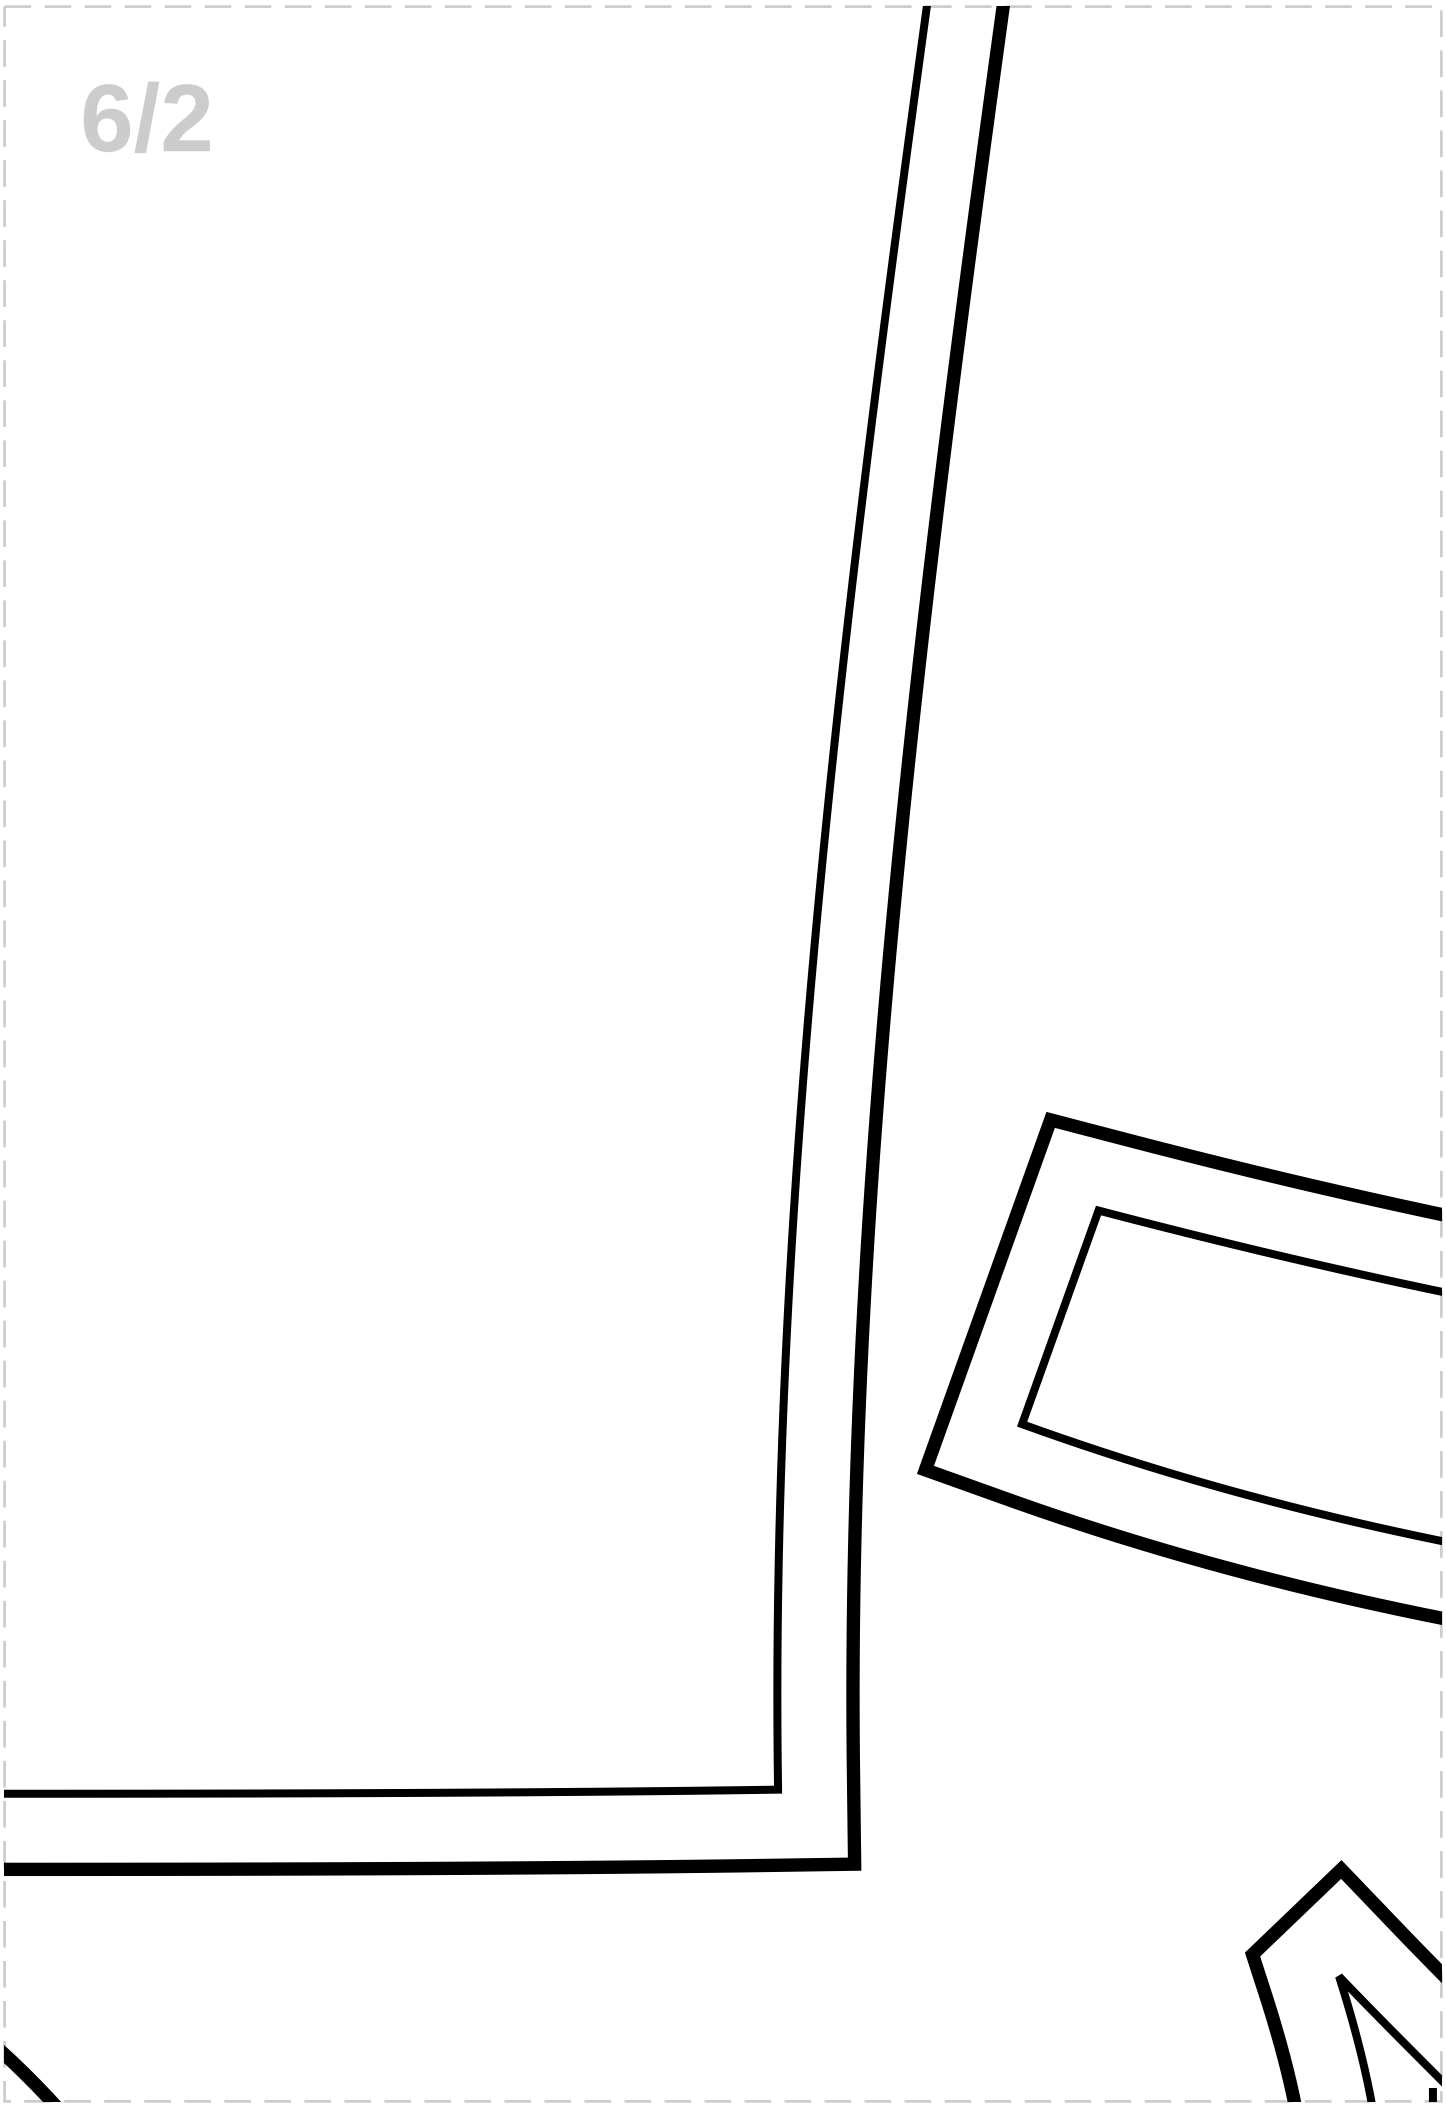

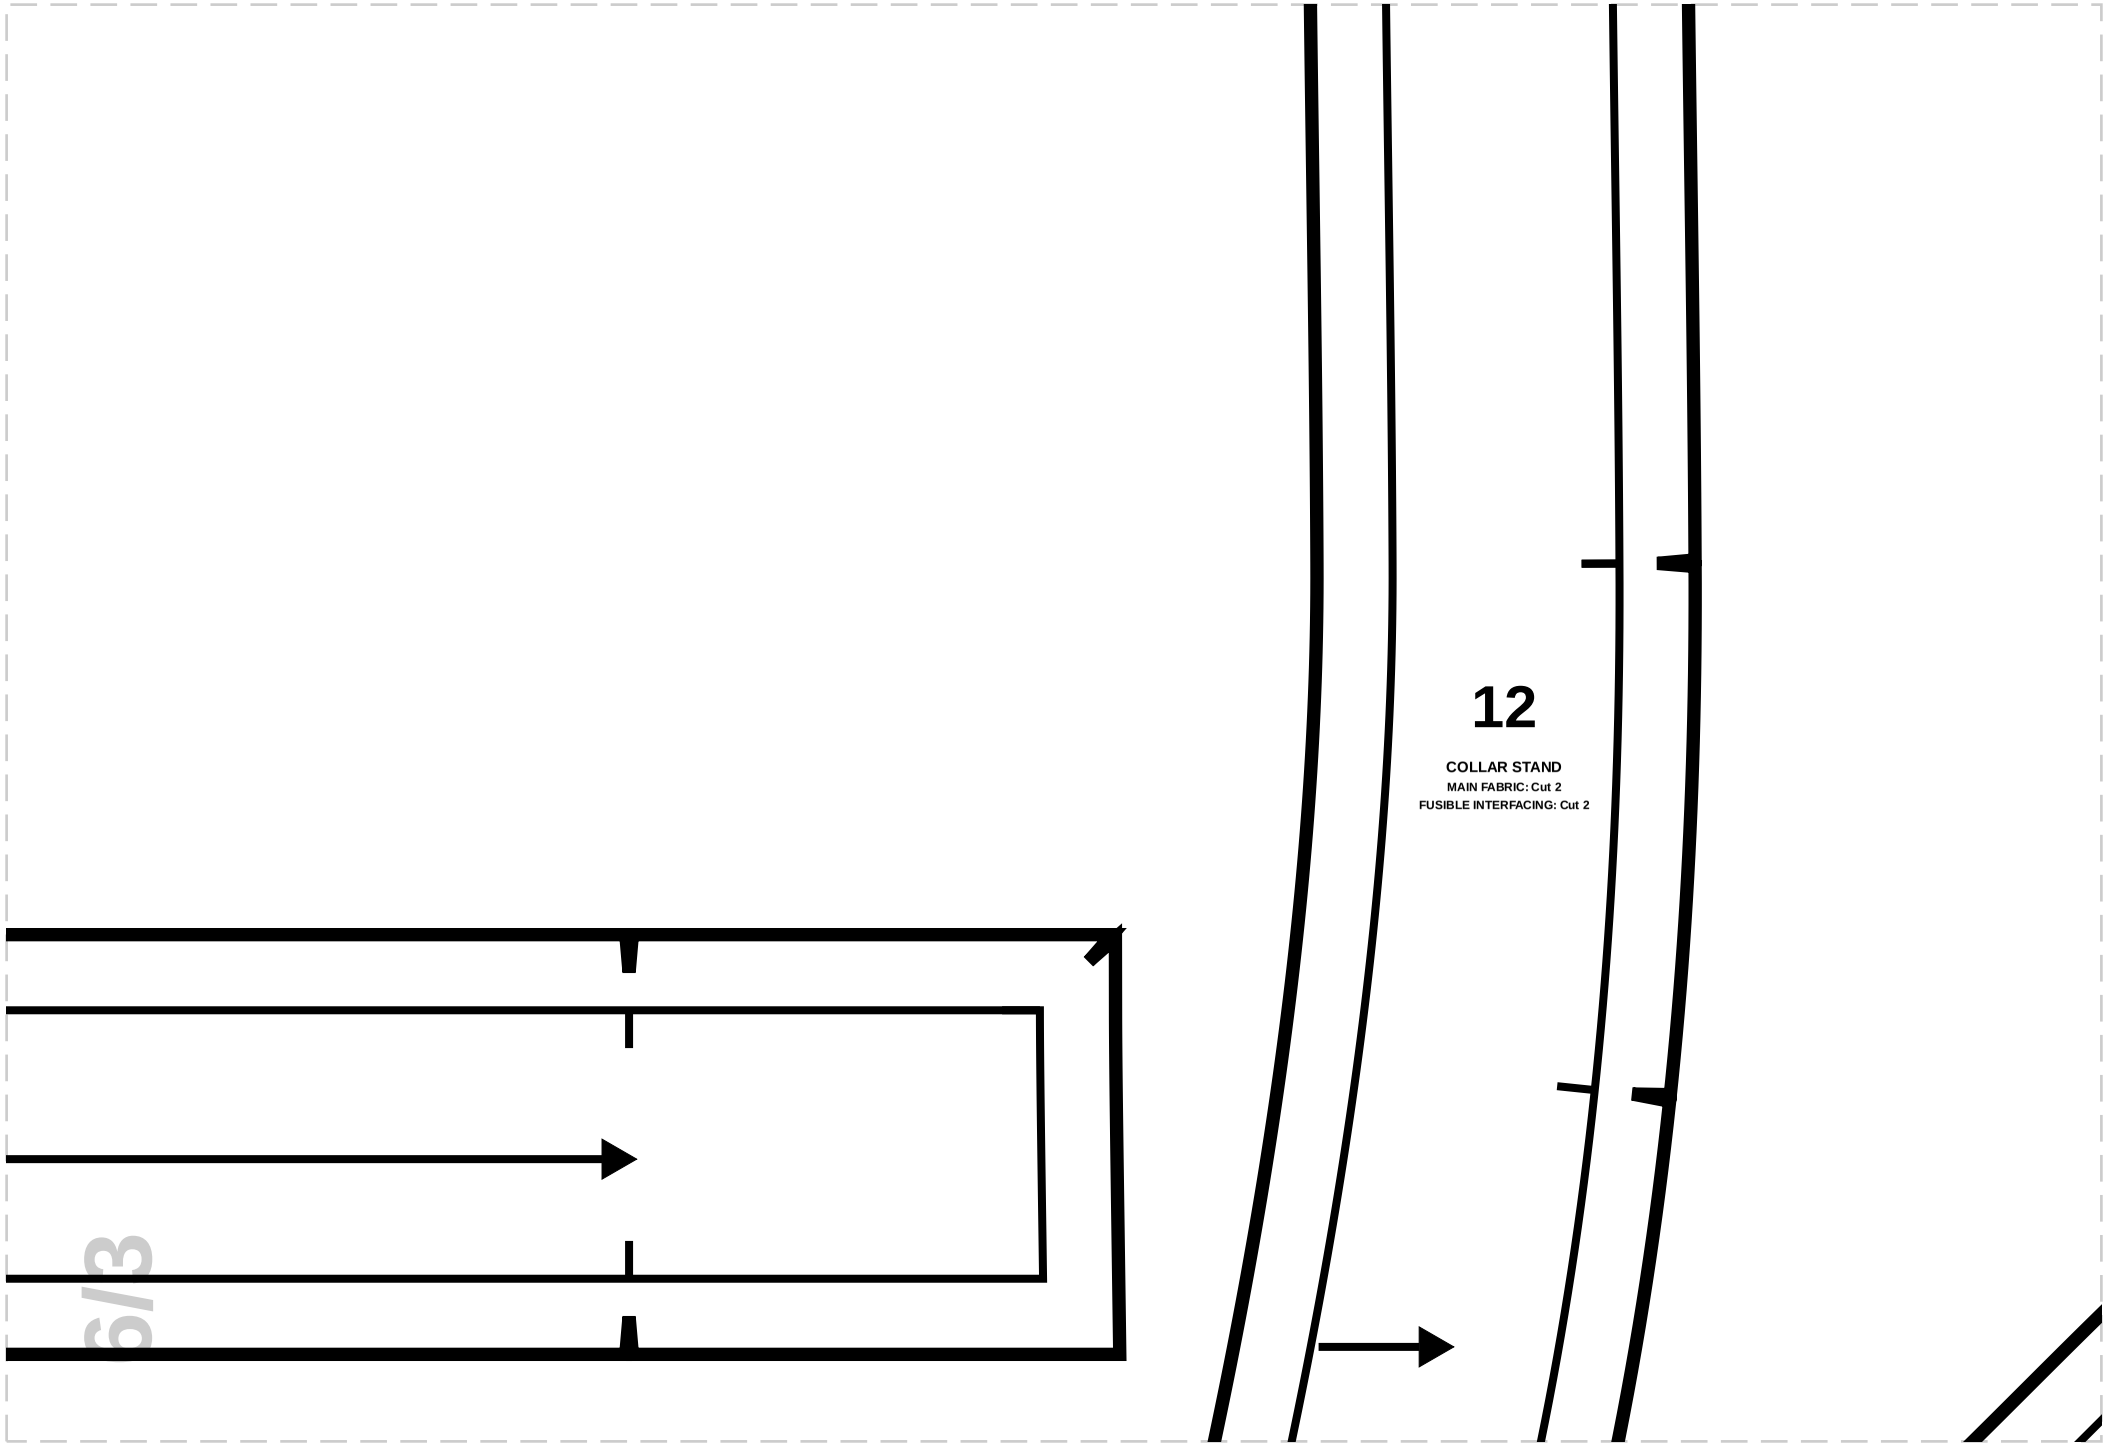
12
COLLAR STAND
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
6/3

6/4

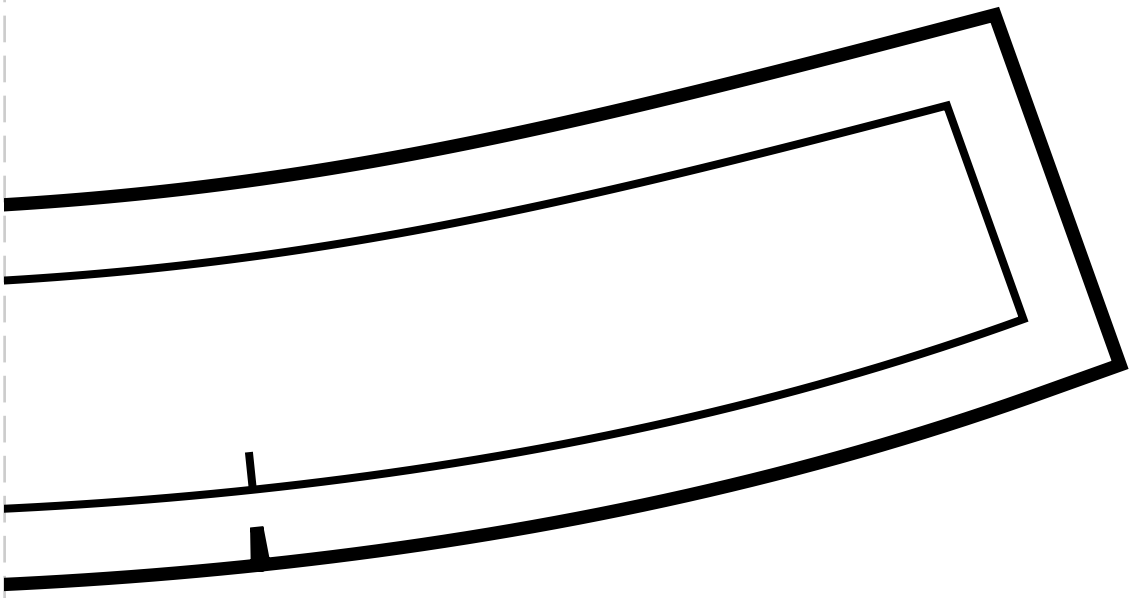

8

SLEEVE

MAIN FABRIC: Cut 2

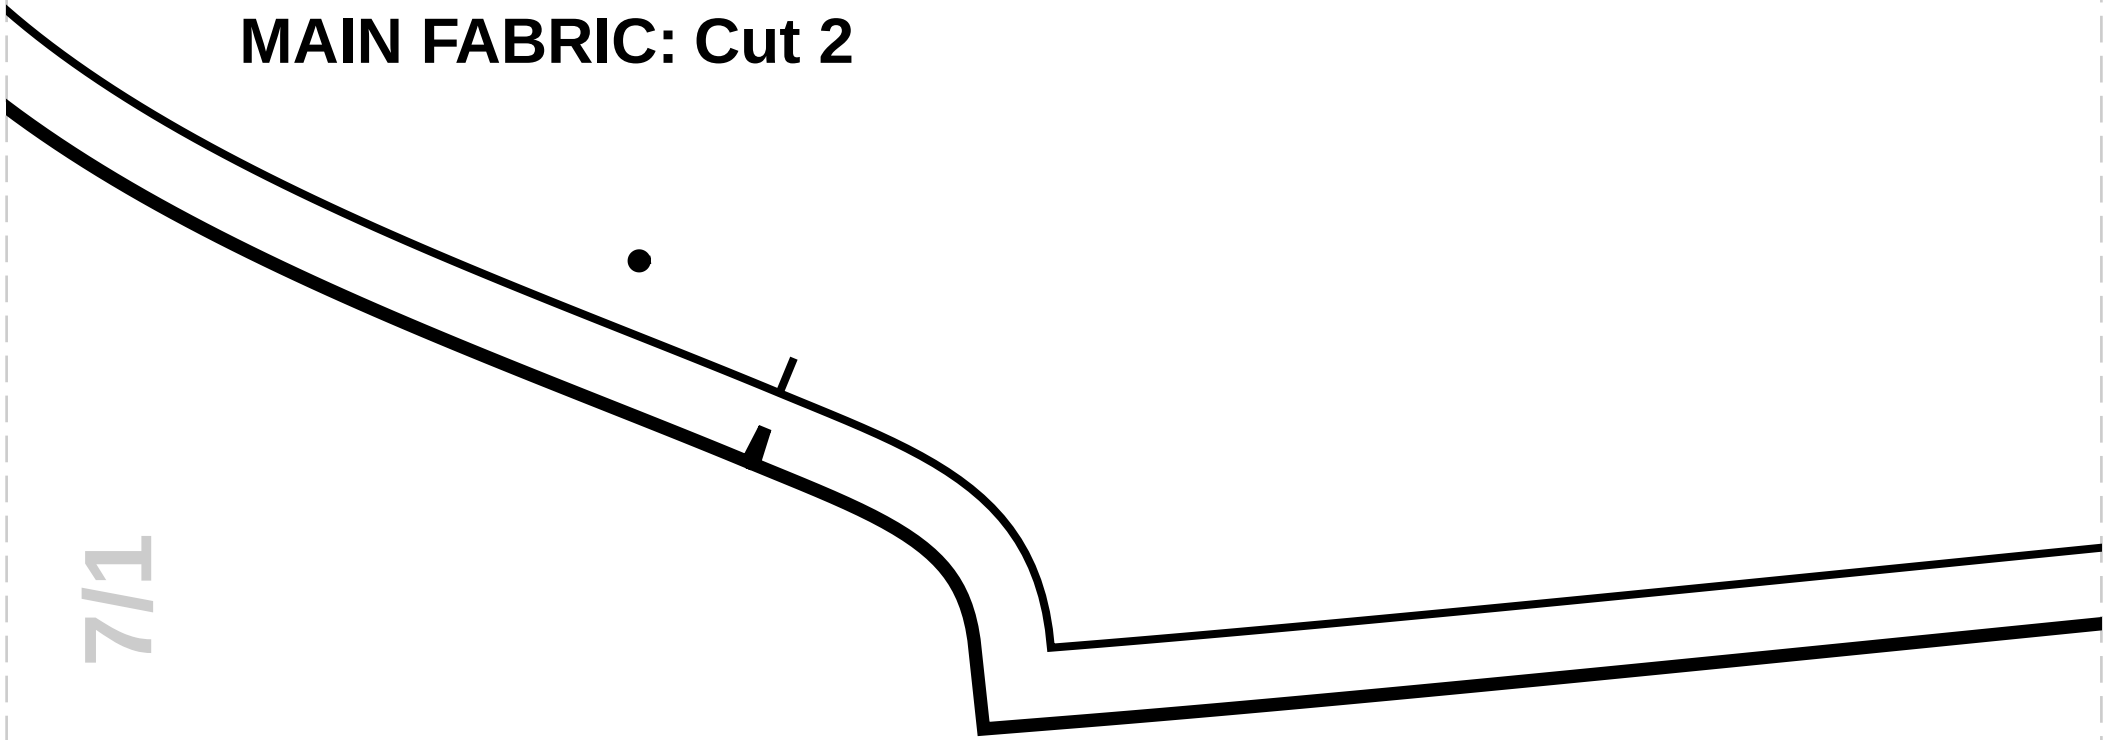

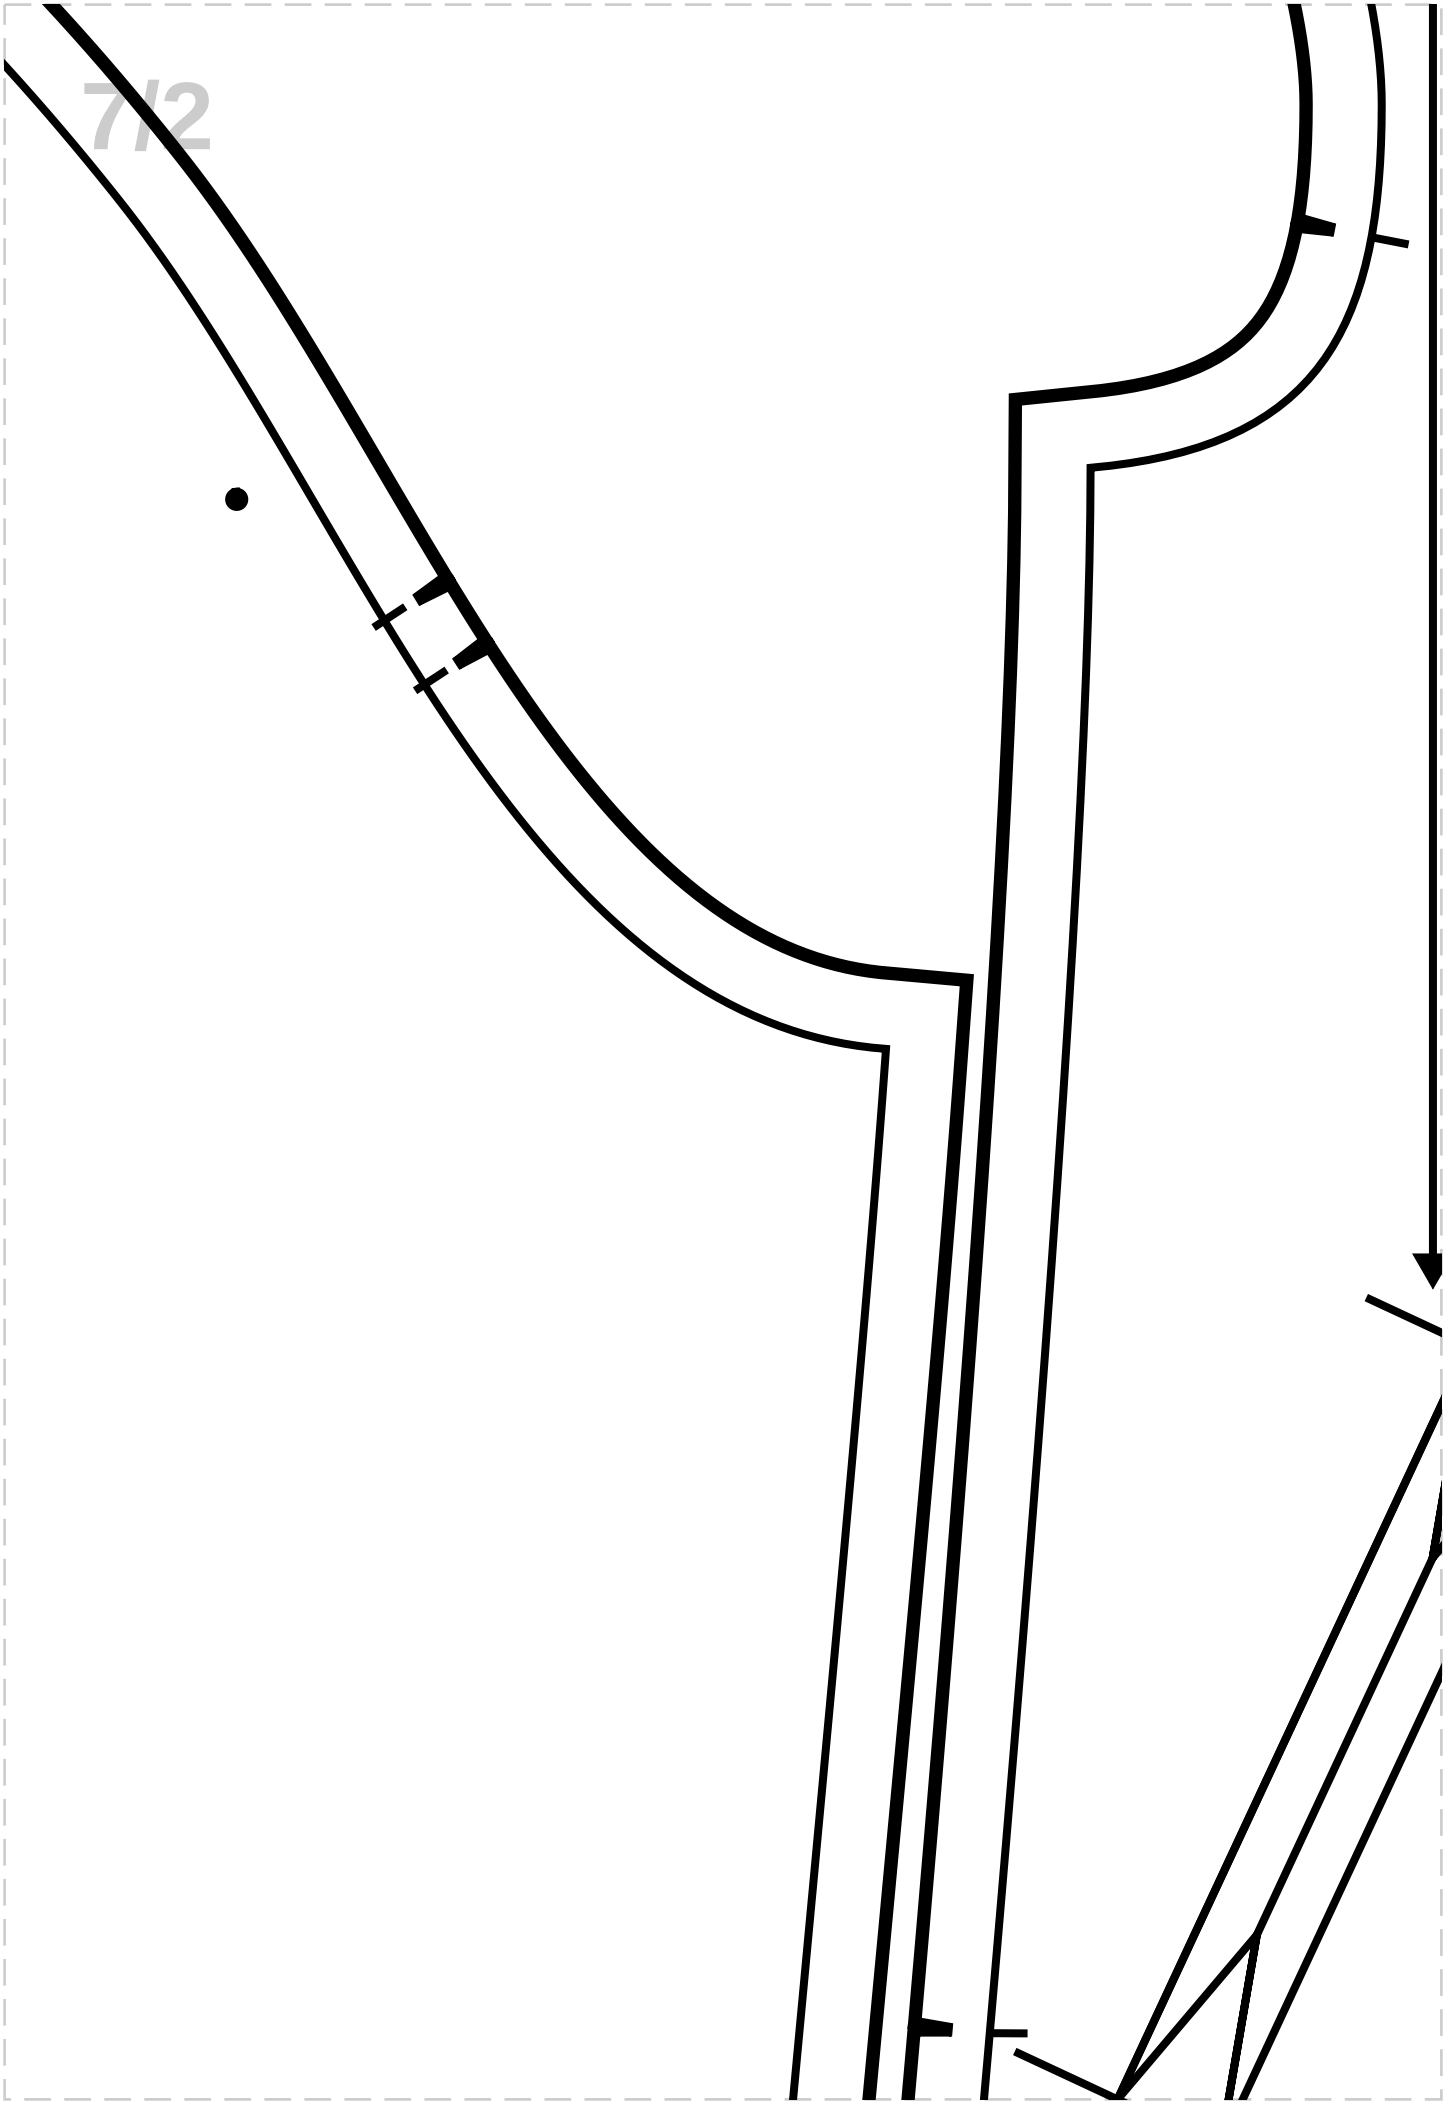

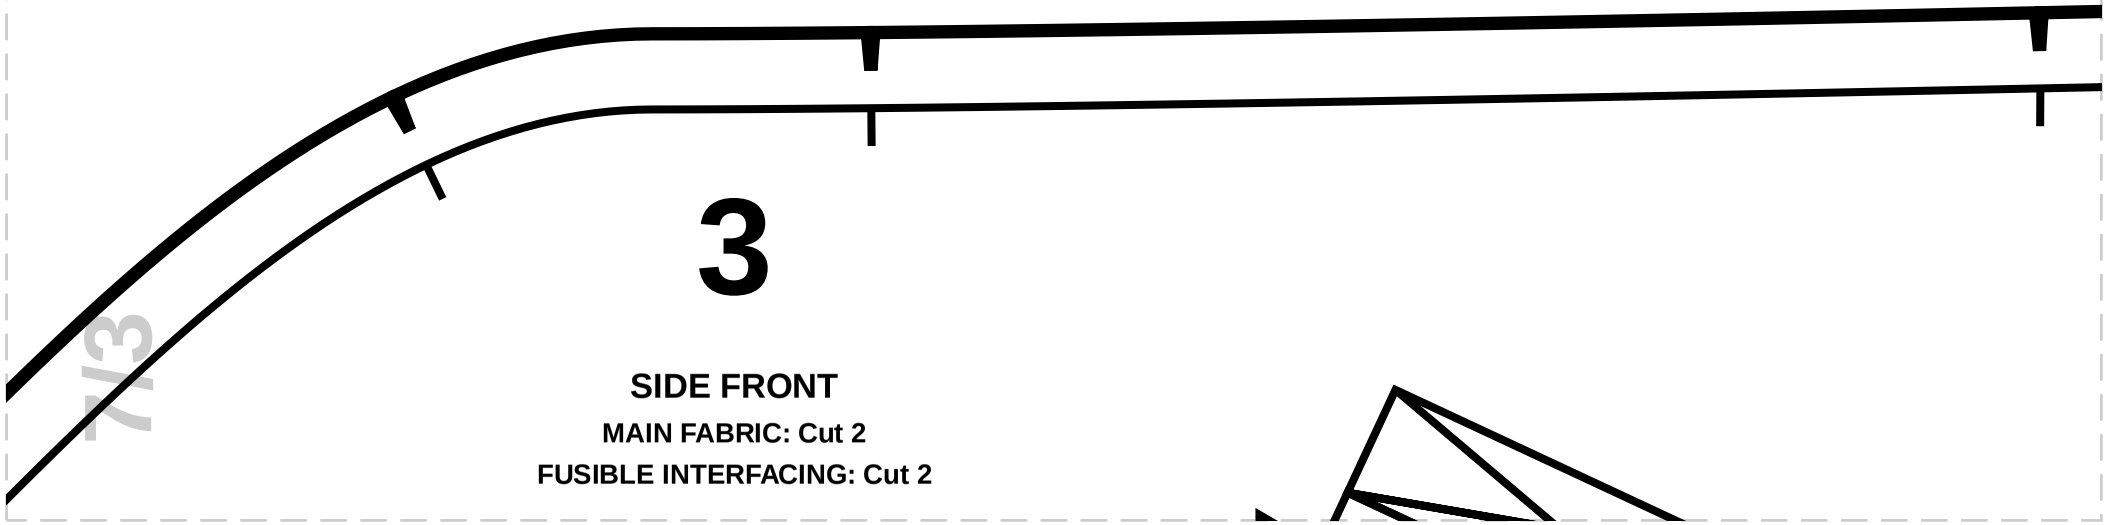

7/3

3

SIDE FRONT

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

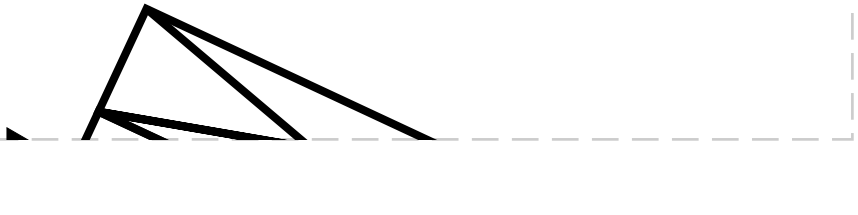

7/4

7/5

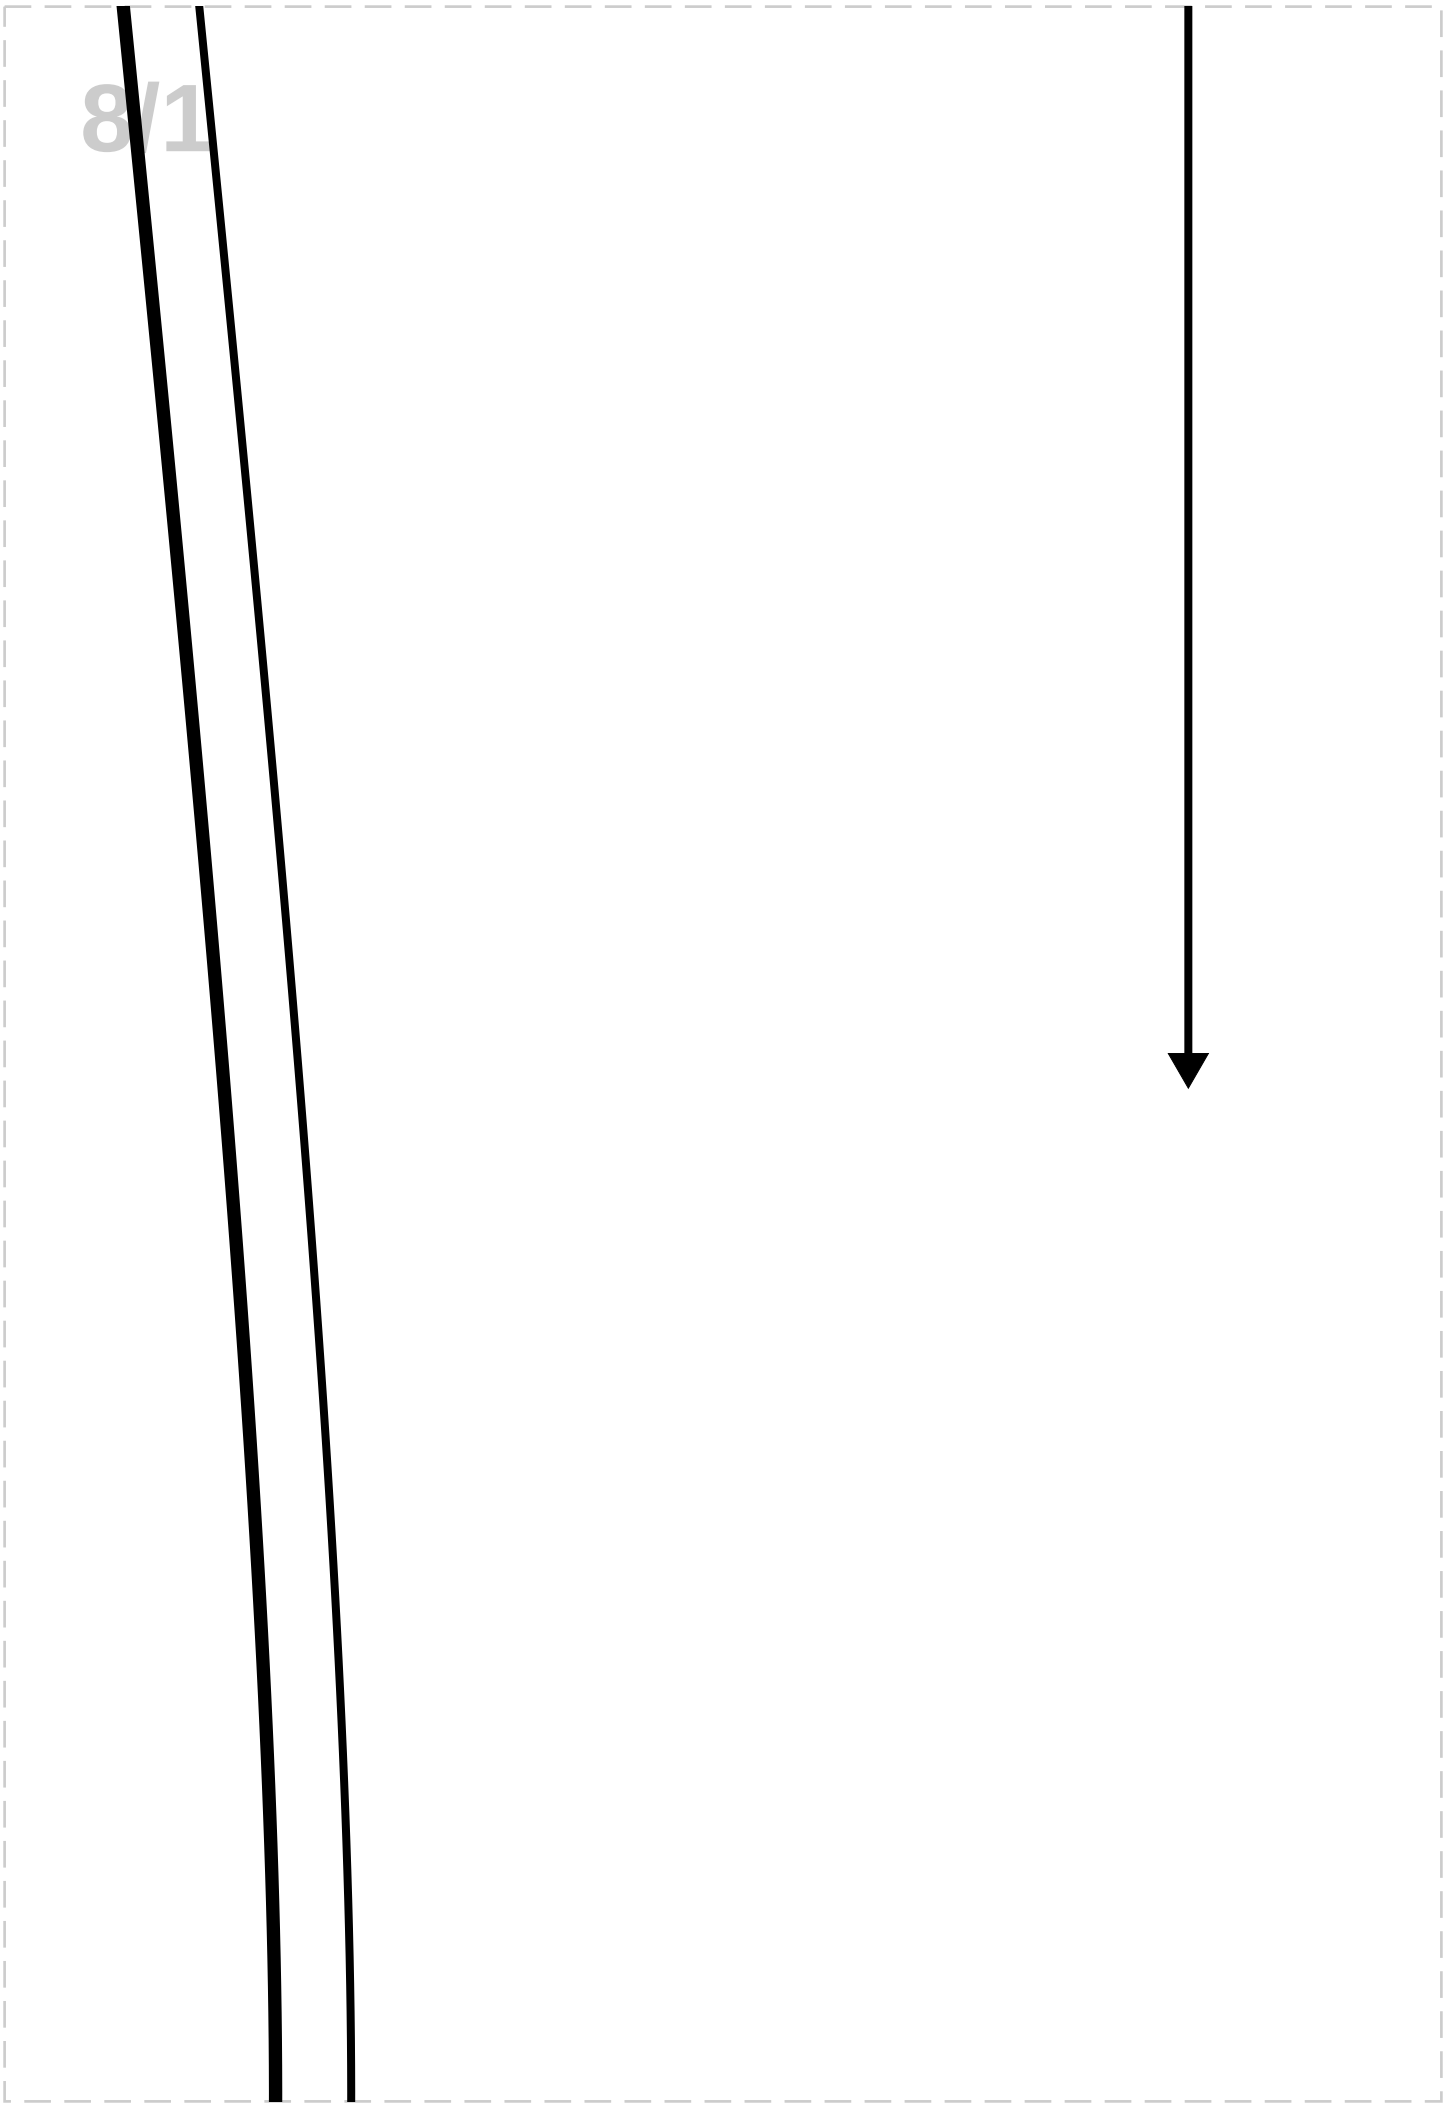

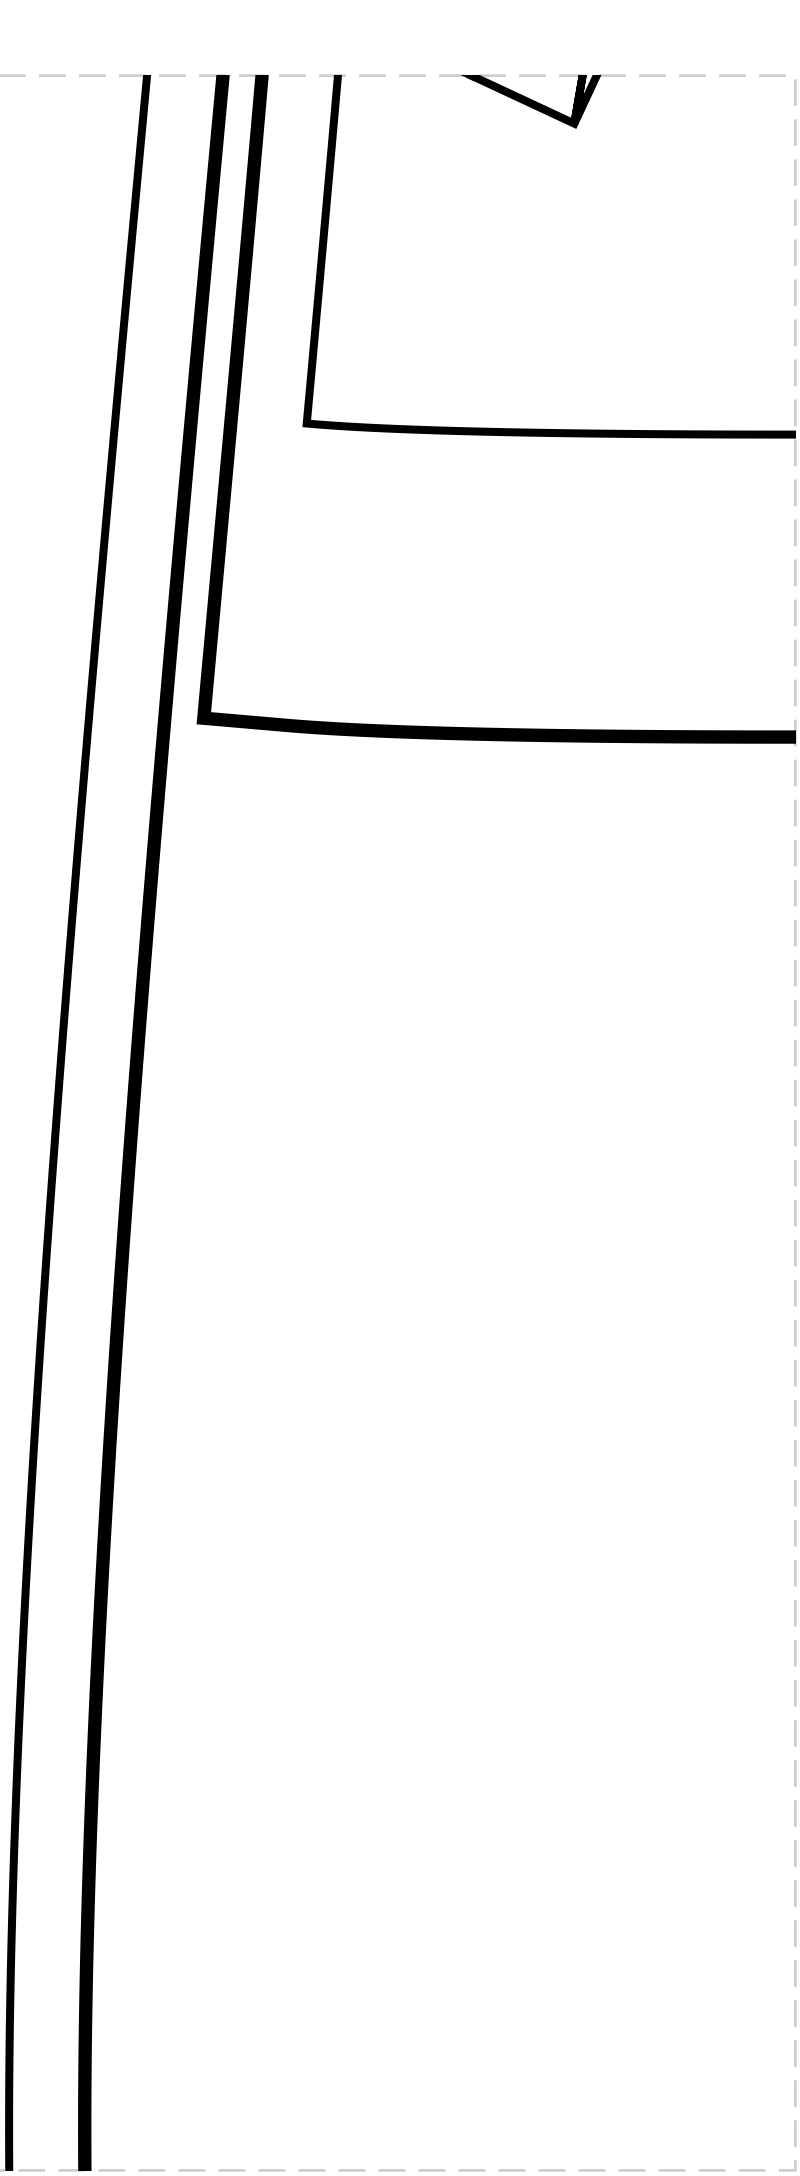

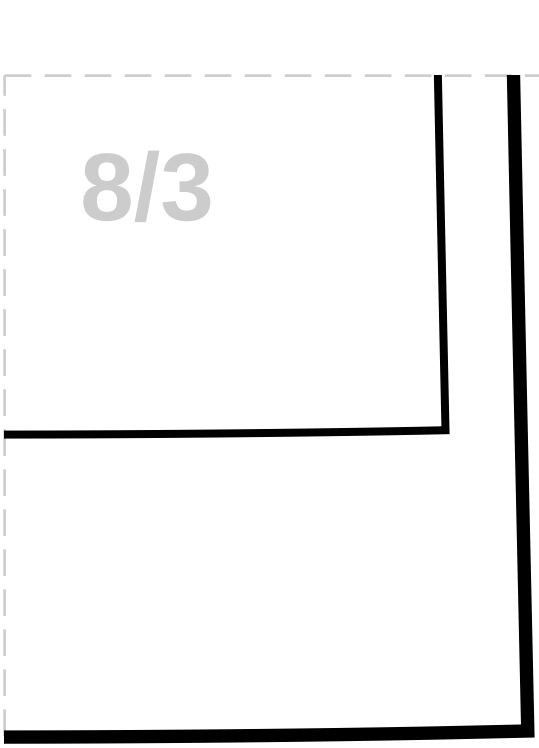
8/3

8/4

8/5

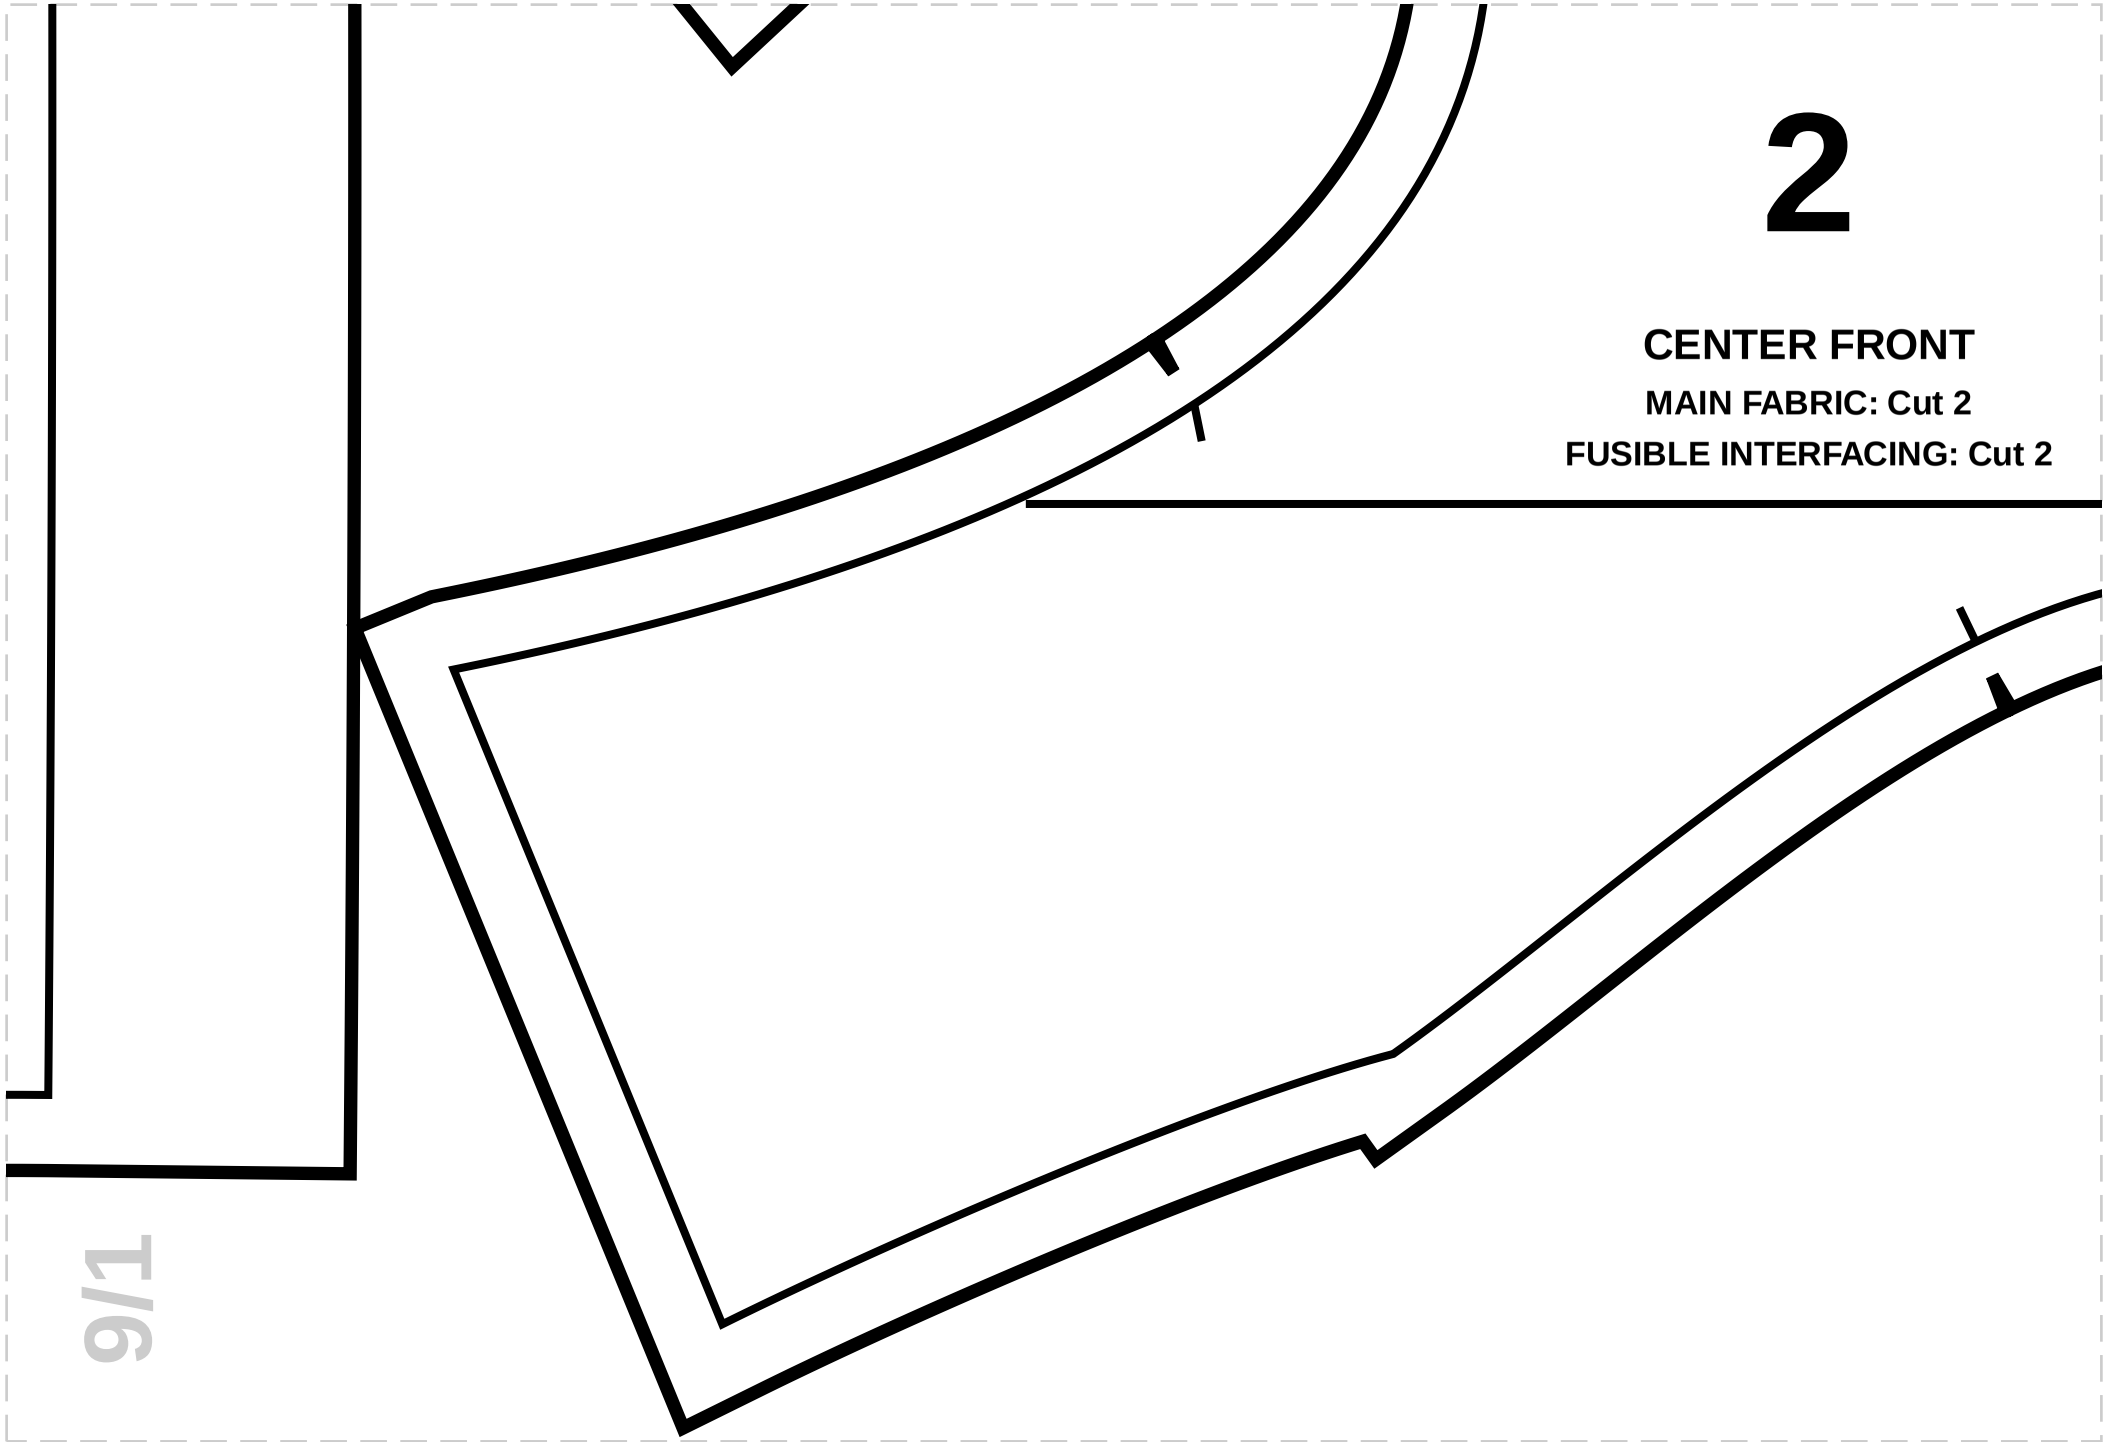

2

CENTER FRONT

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

9/1

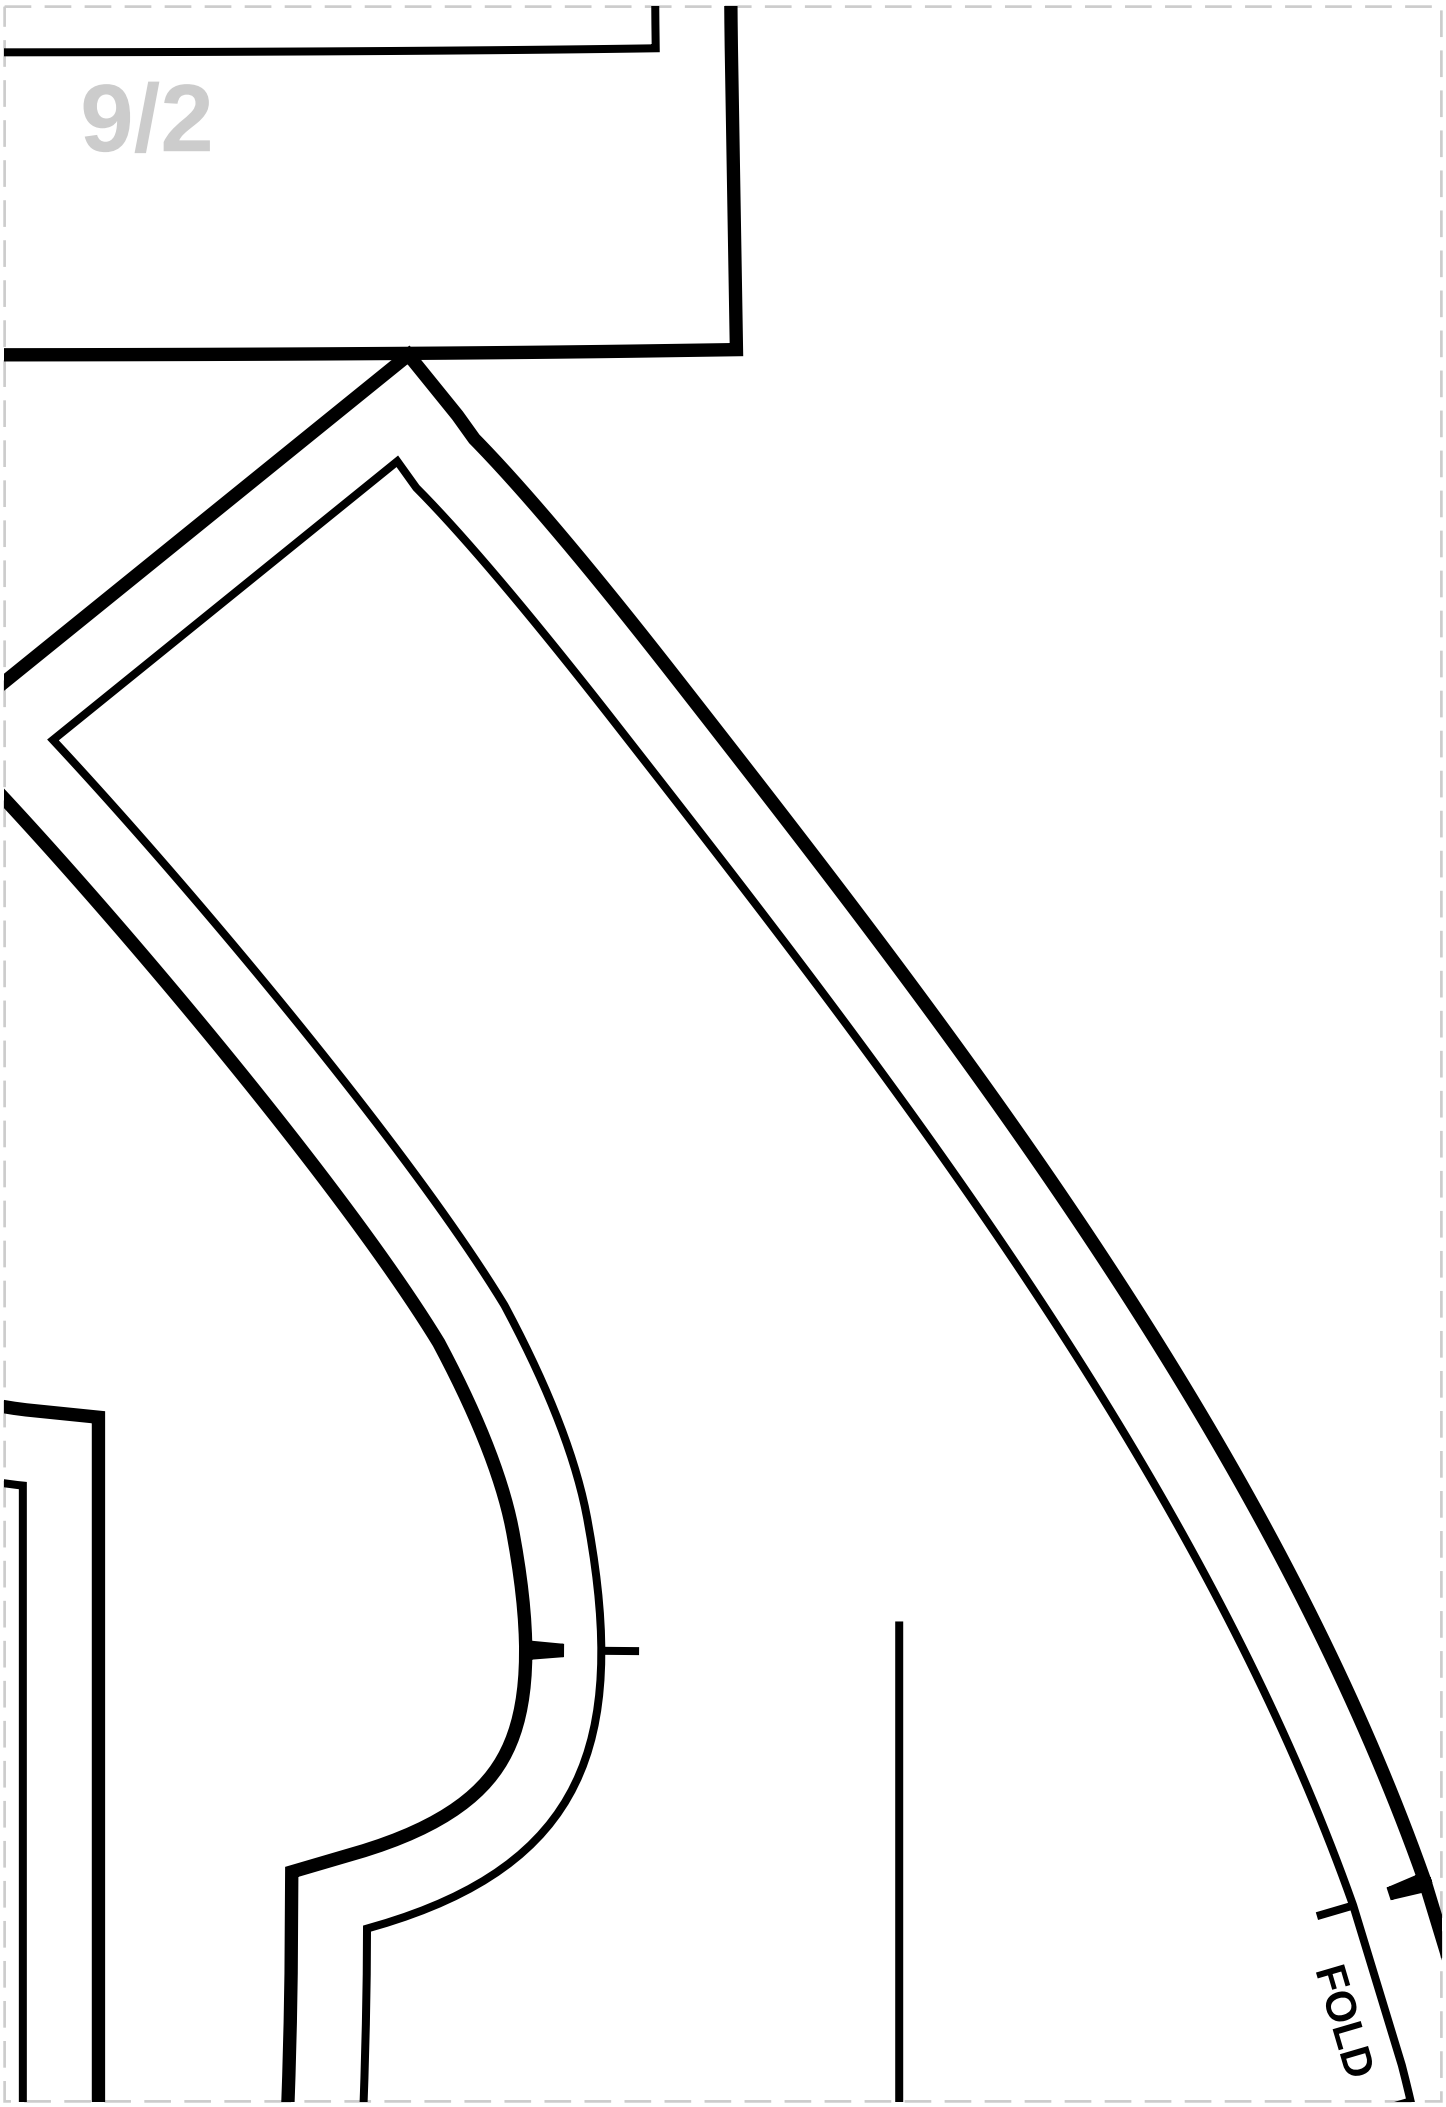
9/2
FOLD

9/3

9/4

9/5

10/1

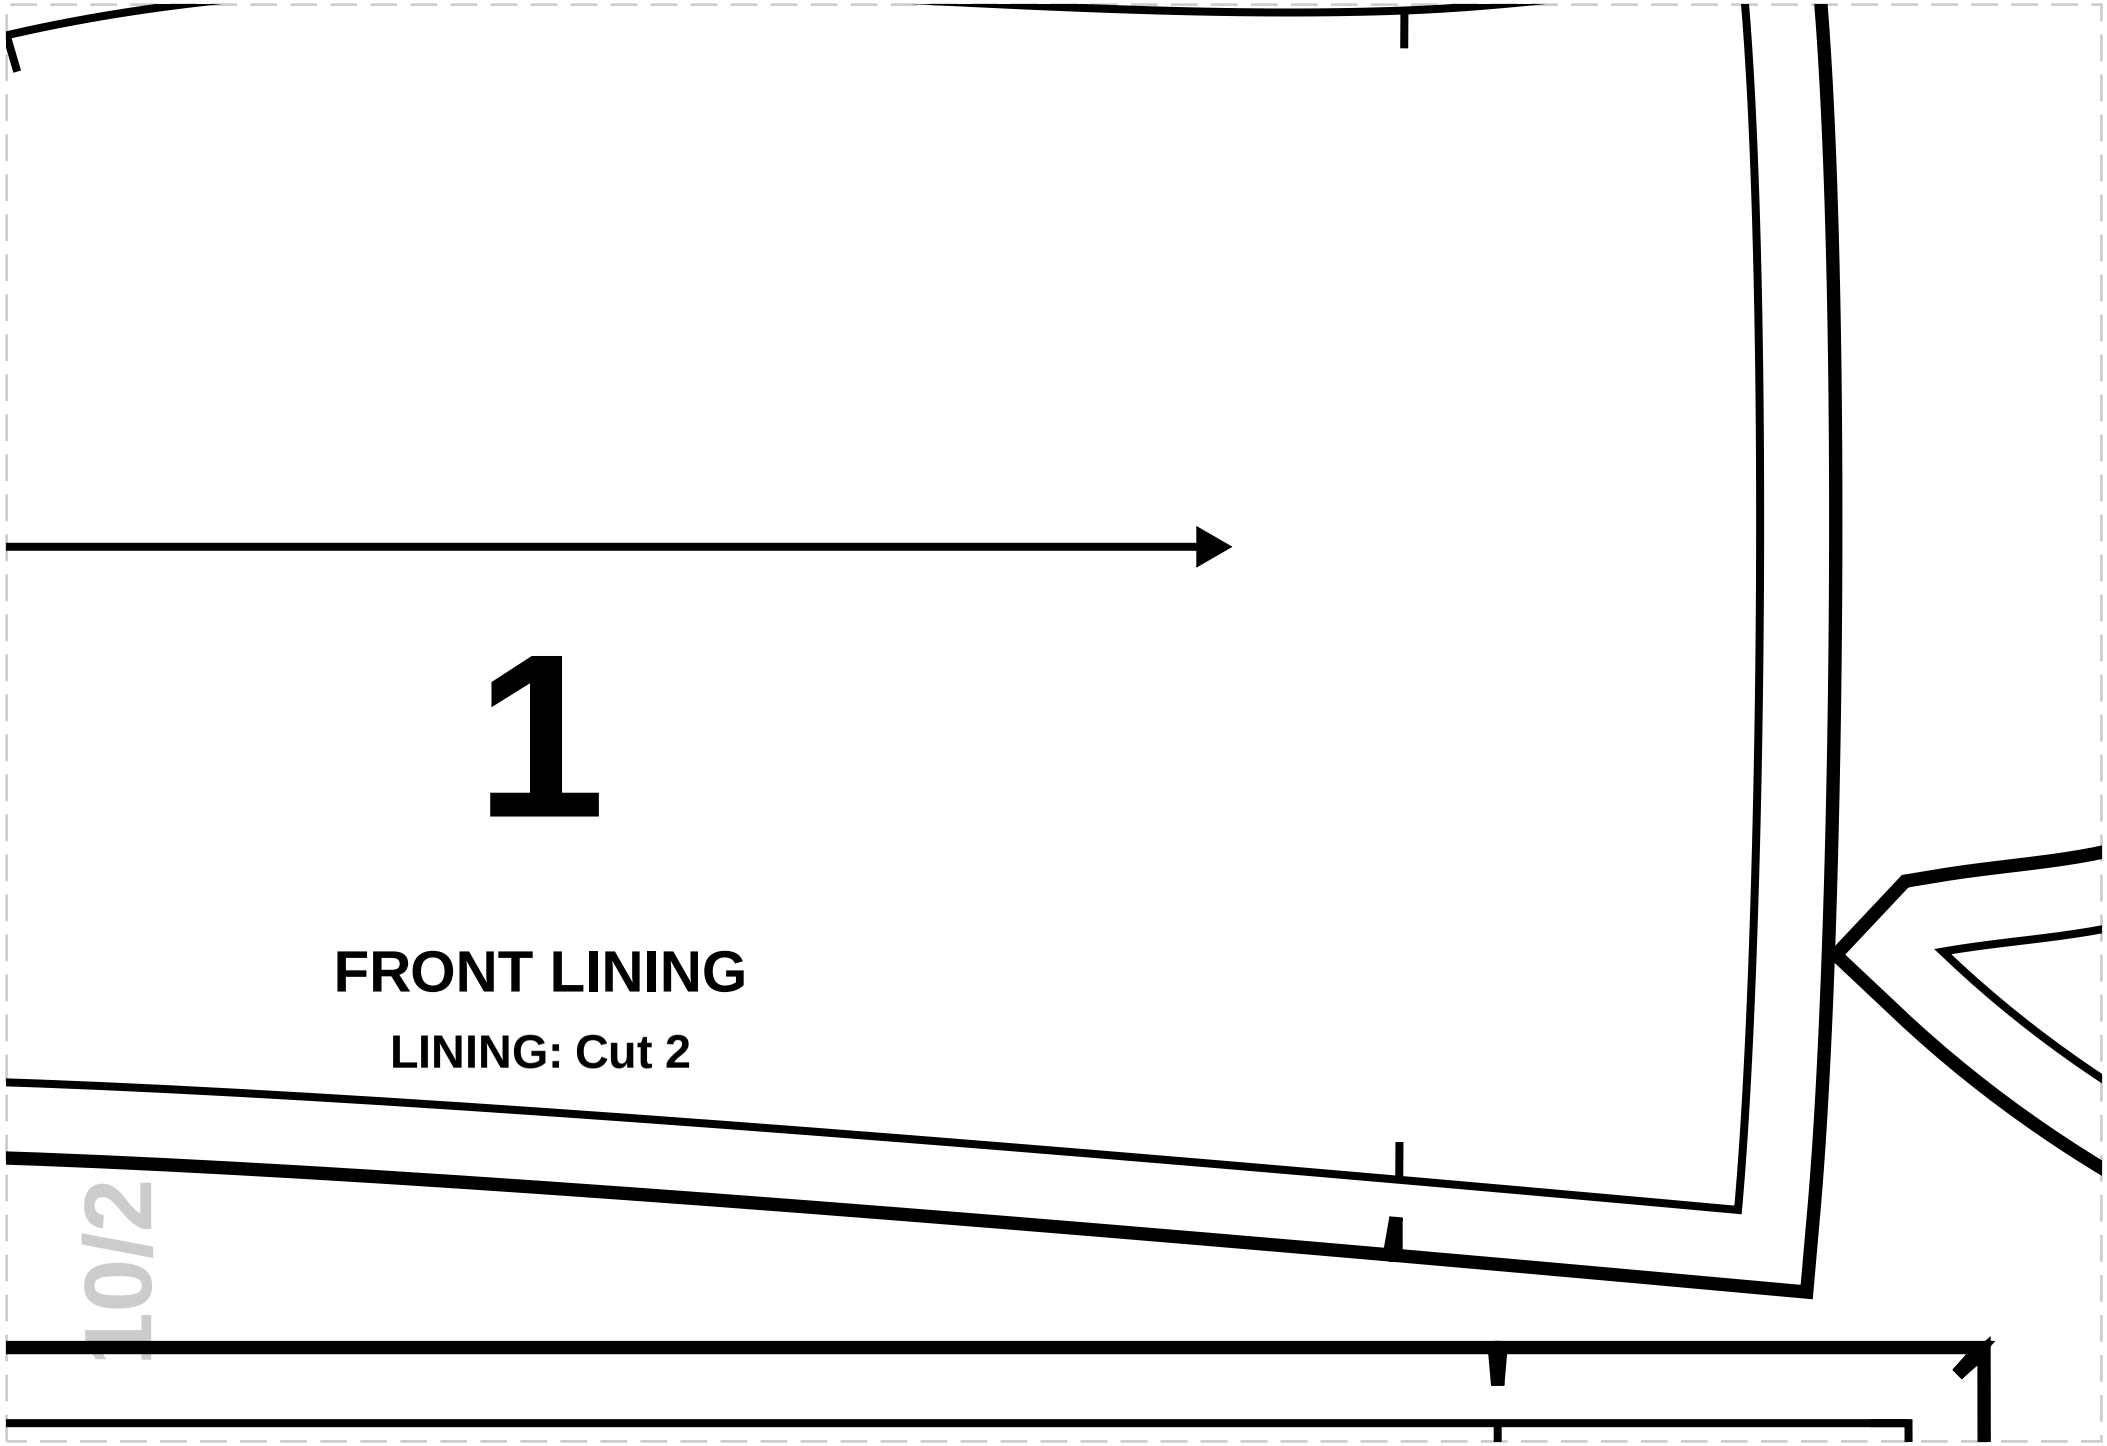
1
FRONT LINING
LINING: Cut 2

10/4

10/5

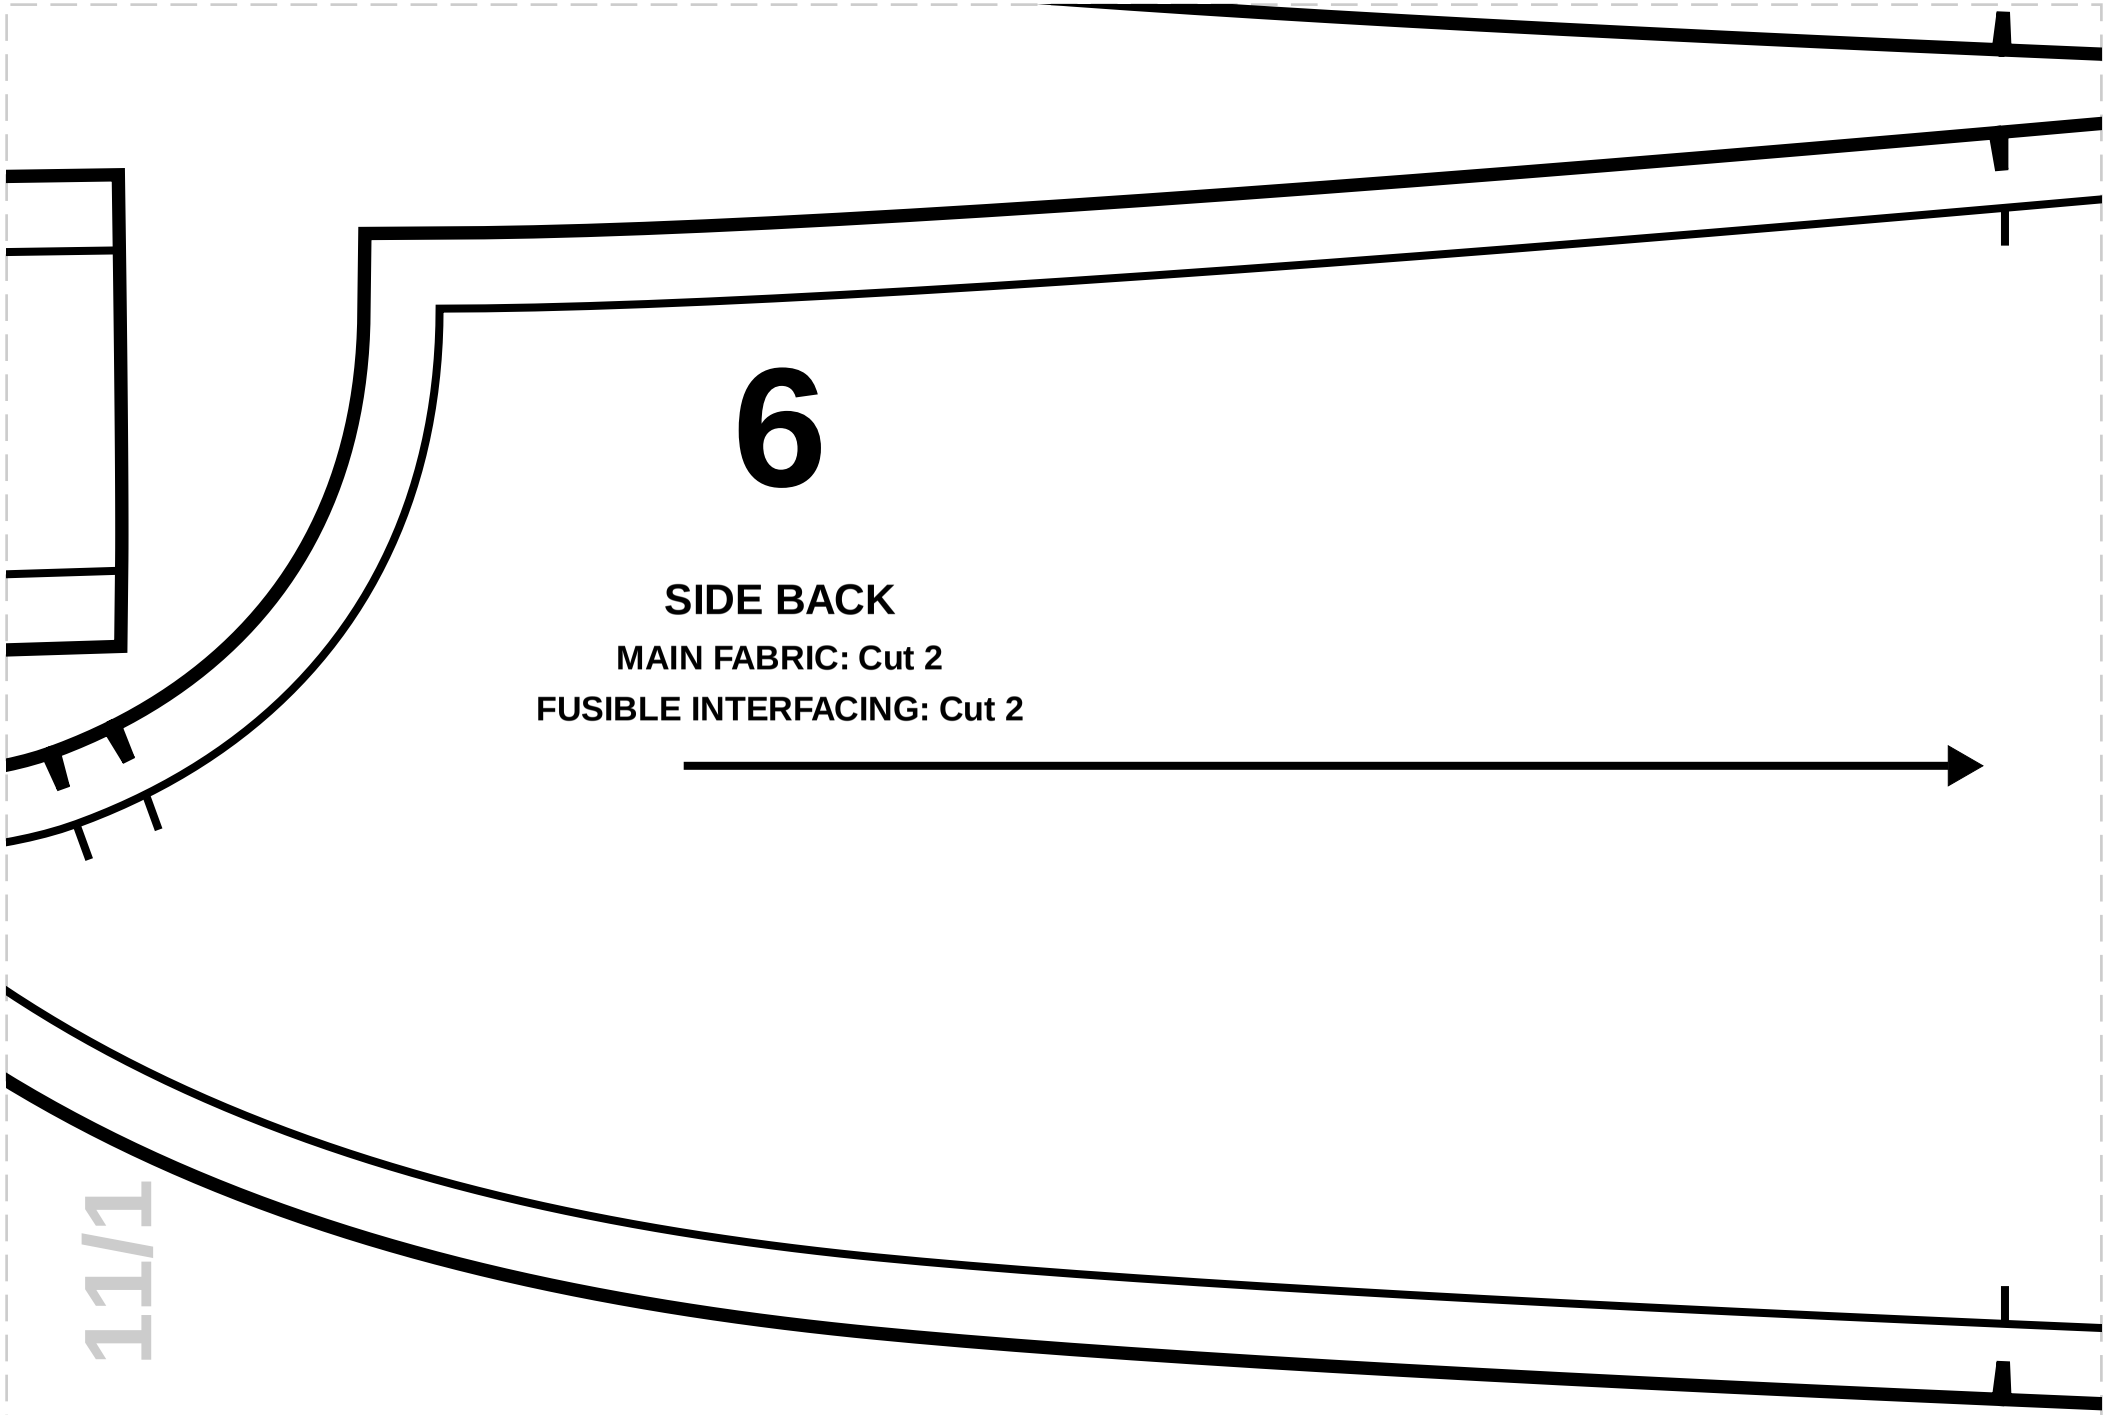

6

SIDE BACK

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

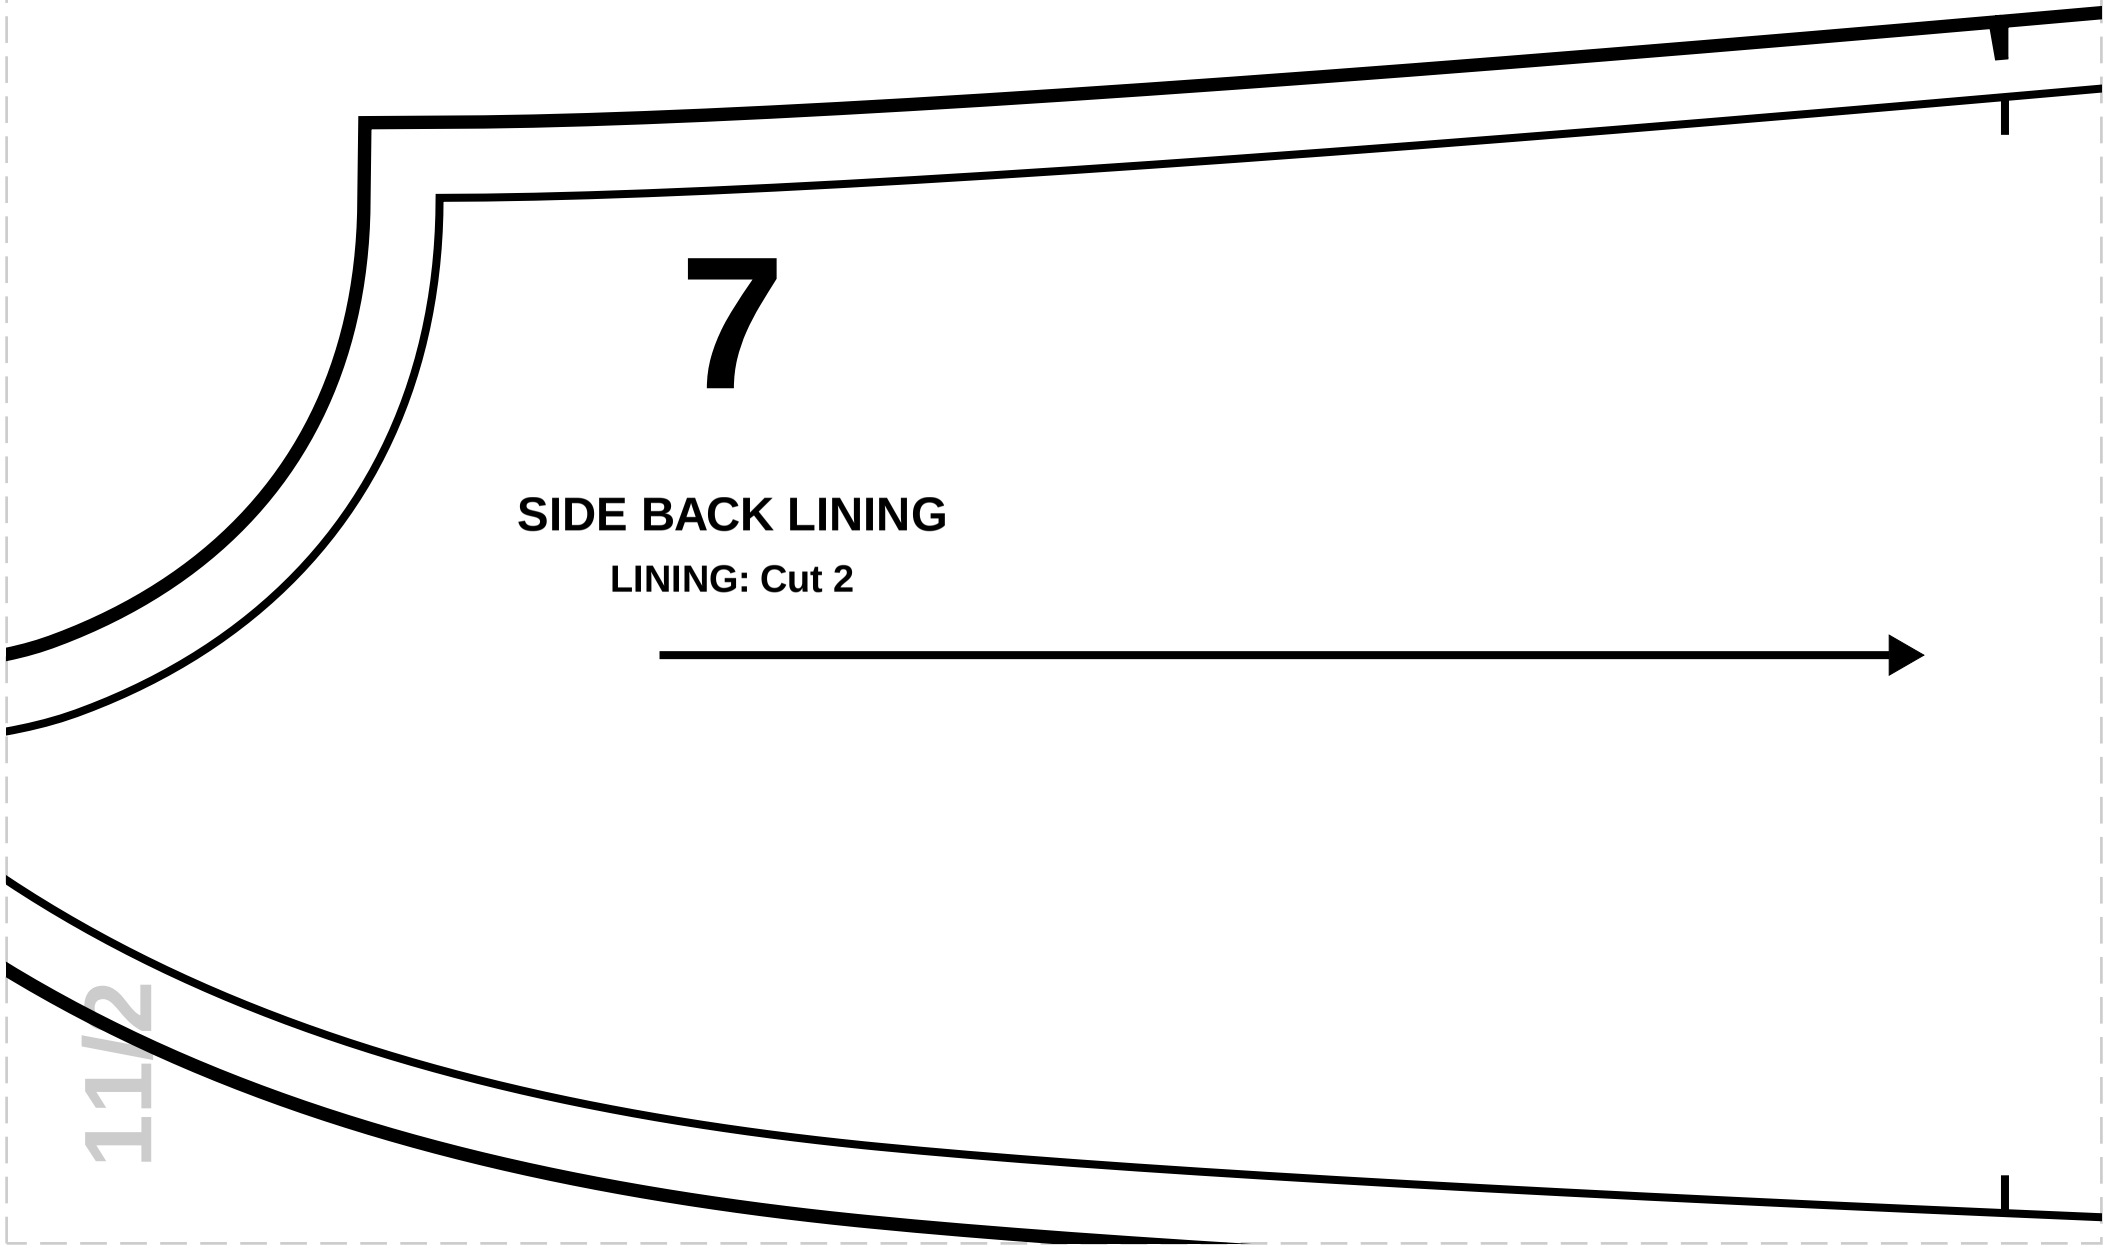
7
SIDE BACK LINING
LINING: Cut 2
11/2

11/3

11/4

11/5

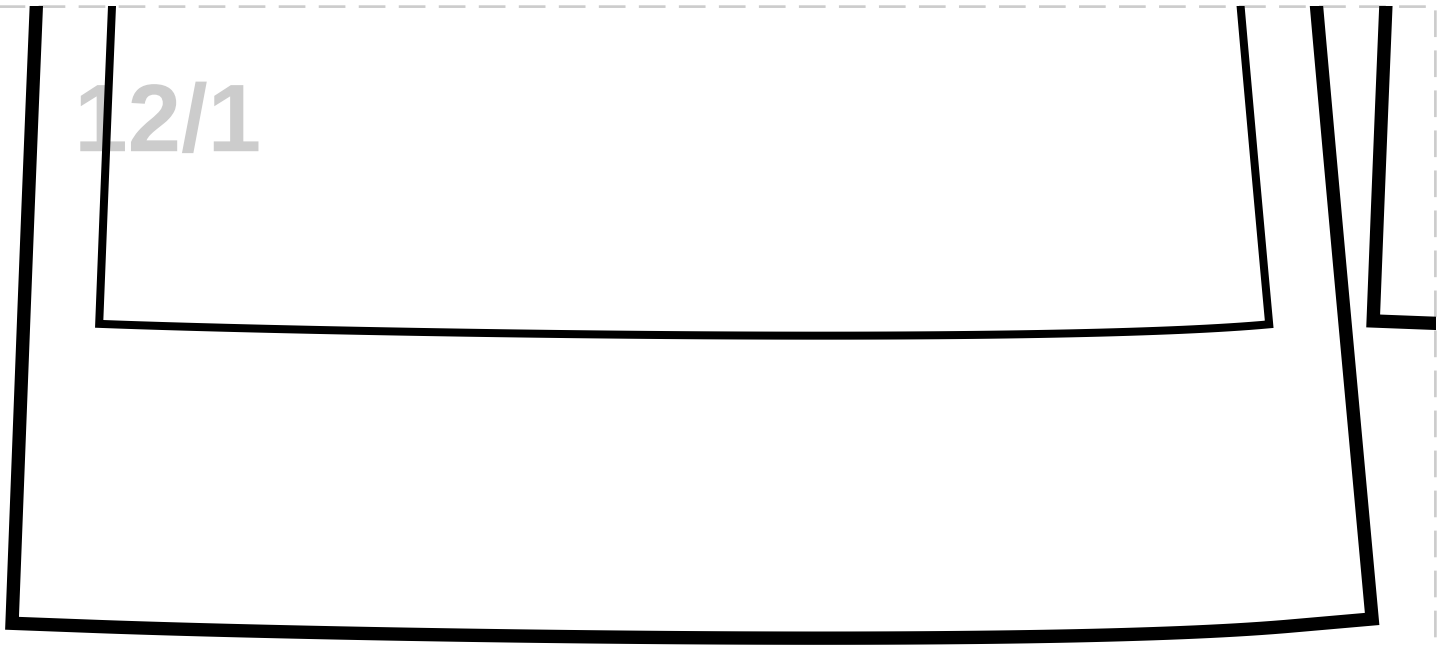
12/1

12/3

12/4

12/5