Sewcraftly
SEWING PATTERNS

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 109.25, Waist: 93.25, Hips: 115.5
SIZE 16

Notes

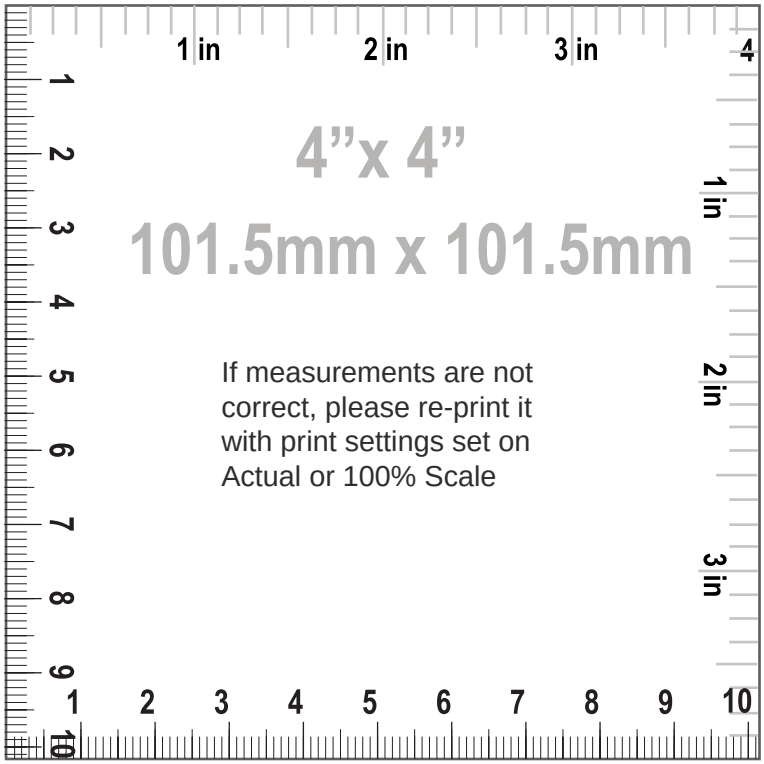

How to print

Printing

Once your Calibration Test Page has been printed, measure the 4”x 4” (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

Thank you for your purchase!
This pattern is for personal use only. Please do not share, copy or resell it.
© Sewcraftly

SIZE 16
Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT LINING", LINING: Cut 2
2. "CENTER FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
3. "SIDE FRONT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
4. "CENTER BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
5. "CENTER BACK LINING", LINING: Cut 1
6. "SIDE BACK", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "SIDE BACK LINING", LINING: Cut 2
8. "SLEEVE", MAIN FABRIC: Cut 2
9. "SLEEVE LINING", LINING: Cut 2
10. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
11. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
12. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
13. "WELT", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
14. "INNER POCKET BAG", LINING: Cut 2
15. "OUTER POCKET BAG", MAIN FABRIC: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Shoulder pads thickness 1.00 none (3/8 in)
6. Pocket entry length 12.83 cm (5 in)
7. Waist to pocket length 15.60 cm (6 1/8 in)
8. Side seam pocket position 2.85 cm (1 1/8 in)
9. Pocket width welt 3.00 cm (1 1/8 in)
10. Front exposed 10mm zipper length 34.97 cm (13 3/4 in)
11. Front length from HPS to hem 50.92 cm (20 in)
12. Across chest 59.75 cm (23 1/2 in)
13. Center front length to hem 34.97 cm (13 3/4 in)
14. Center back length to hem 47.15 cm (18 5/8 in)
15. Across front 42.71 cm (16 7/8 in)

16. Across back 41.80 cm (16 1/2 in)
17. Across shoulders 41.94 cm (16 1/2 in)
18. Side seam 21.00 cm (8 1/4 in)
19. Waist 54.10 cm (21 1/4 in)
20. Low hips 66.23 cm (26 1/8 in)
21. Blazer hemline sweep 62.16 cm (24 1/2 in)
22. Armhole length 59.31 cm (23 3/8 in)
23. Neck opening 21.53 cm (8 1/2 in)
24. Front neck drop 15.98 cm (6 1/4 in)
25. Back neck drop 4.07 cm (1 5/8 in)
26. Shoulder width 13.29 cm (5 1/4 in)
27. Apex to apex 22.85 cm (9 in)
28. Stretch factor horizontal 1.00 none (3/8 in)
29. Stretch factor vertical 1.00 none (3/8 in)
30. Sleeve length 58.32 cm (23 in)
31. Sleeve upper arm width 39.74 cm (15 5/8 in)
32. Sleeve opening 27.49 cm (10 7/8 in)
33. Sleeve cap length 60.81 none (24 in)
34. Seam allowance poc max 3.00 none (1 1/8 in)
35. Pocket bag height 18.13 cm (7 1/8 in)
36. Stand height 3.00 cm (1 1/8 in)
37. Collar length 65.25 cm (25 3/4 in)
38. Front exposed 10mm zipper length 37.97 cm (15 in)

Sewcraftly

SEWING PATTERNS

Paper Size: A4;
Print Actual Size (100% Scale);

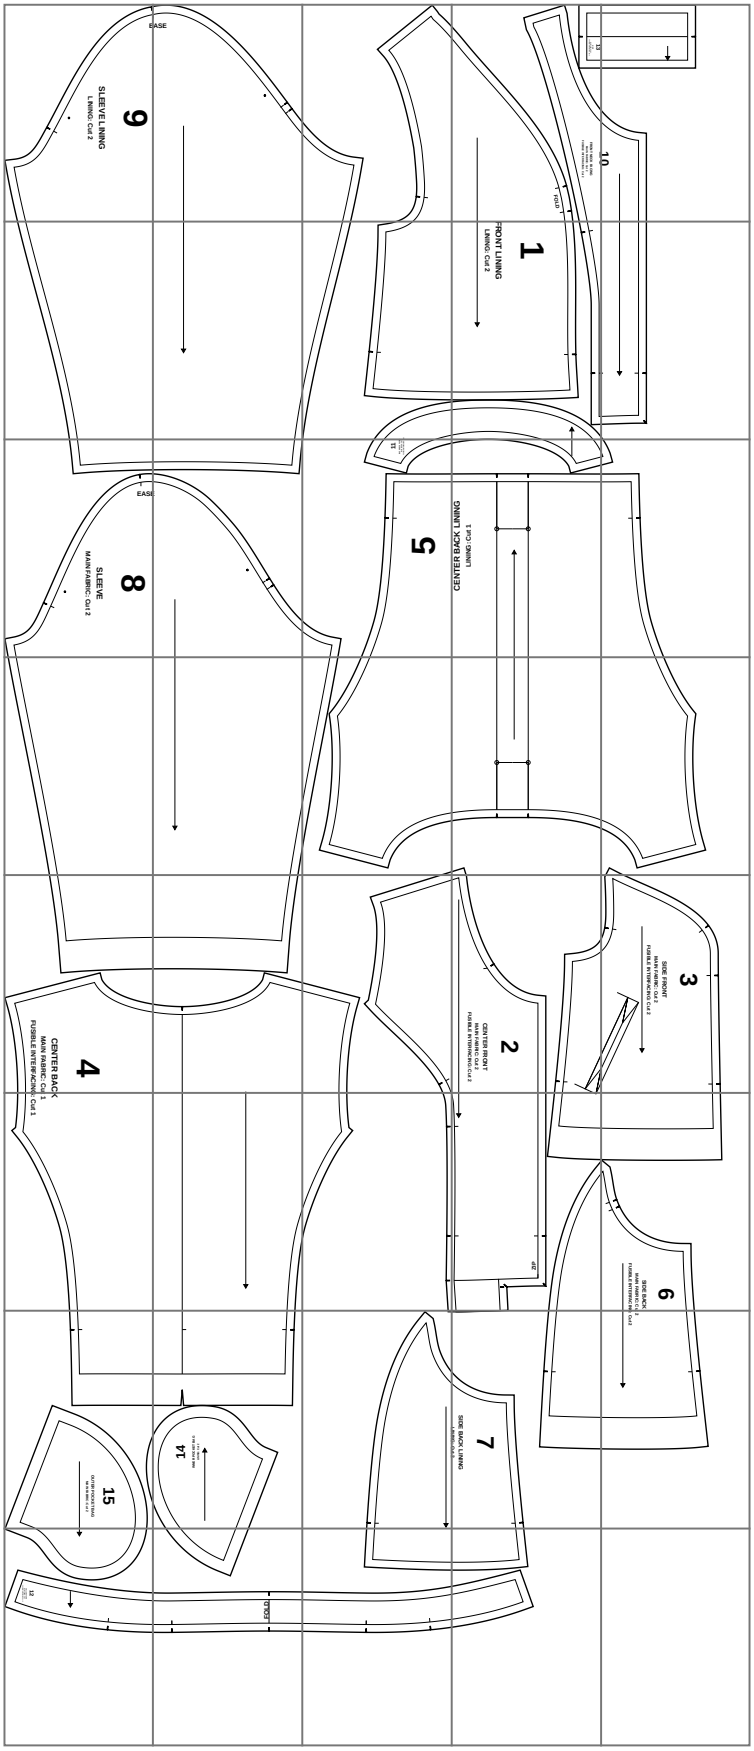

9

SLEEVE LINING

LINING: Cut 2

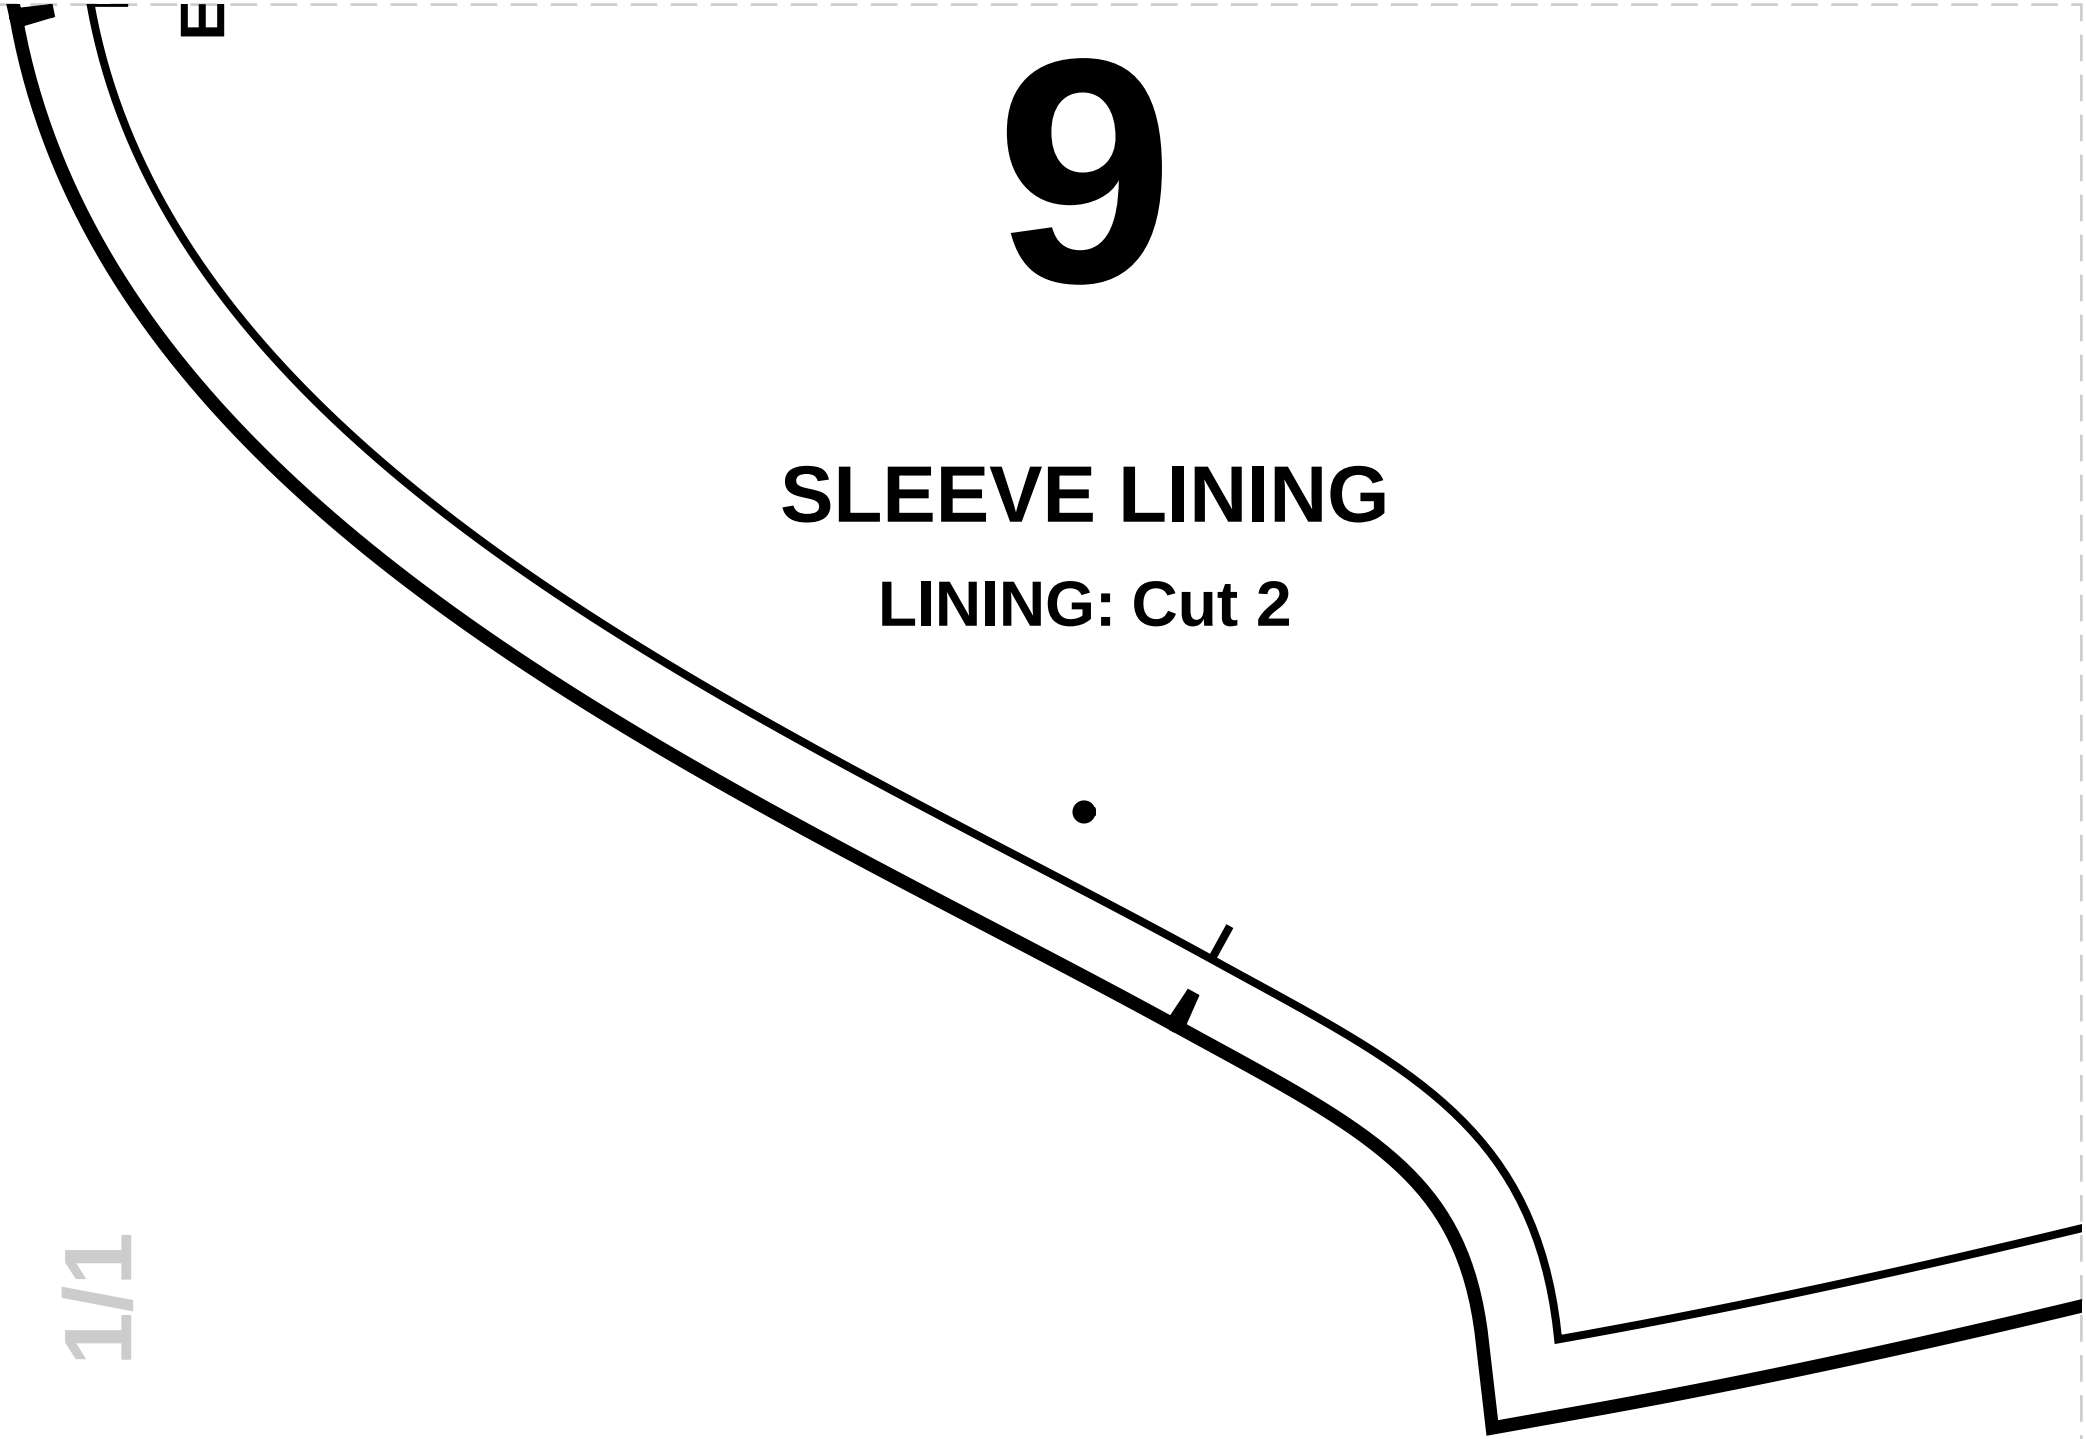

LASE

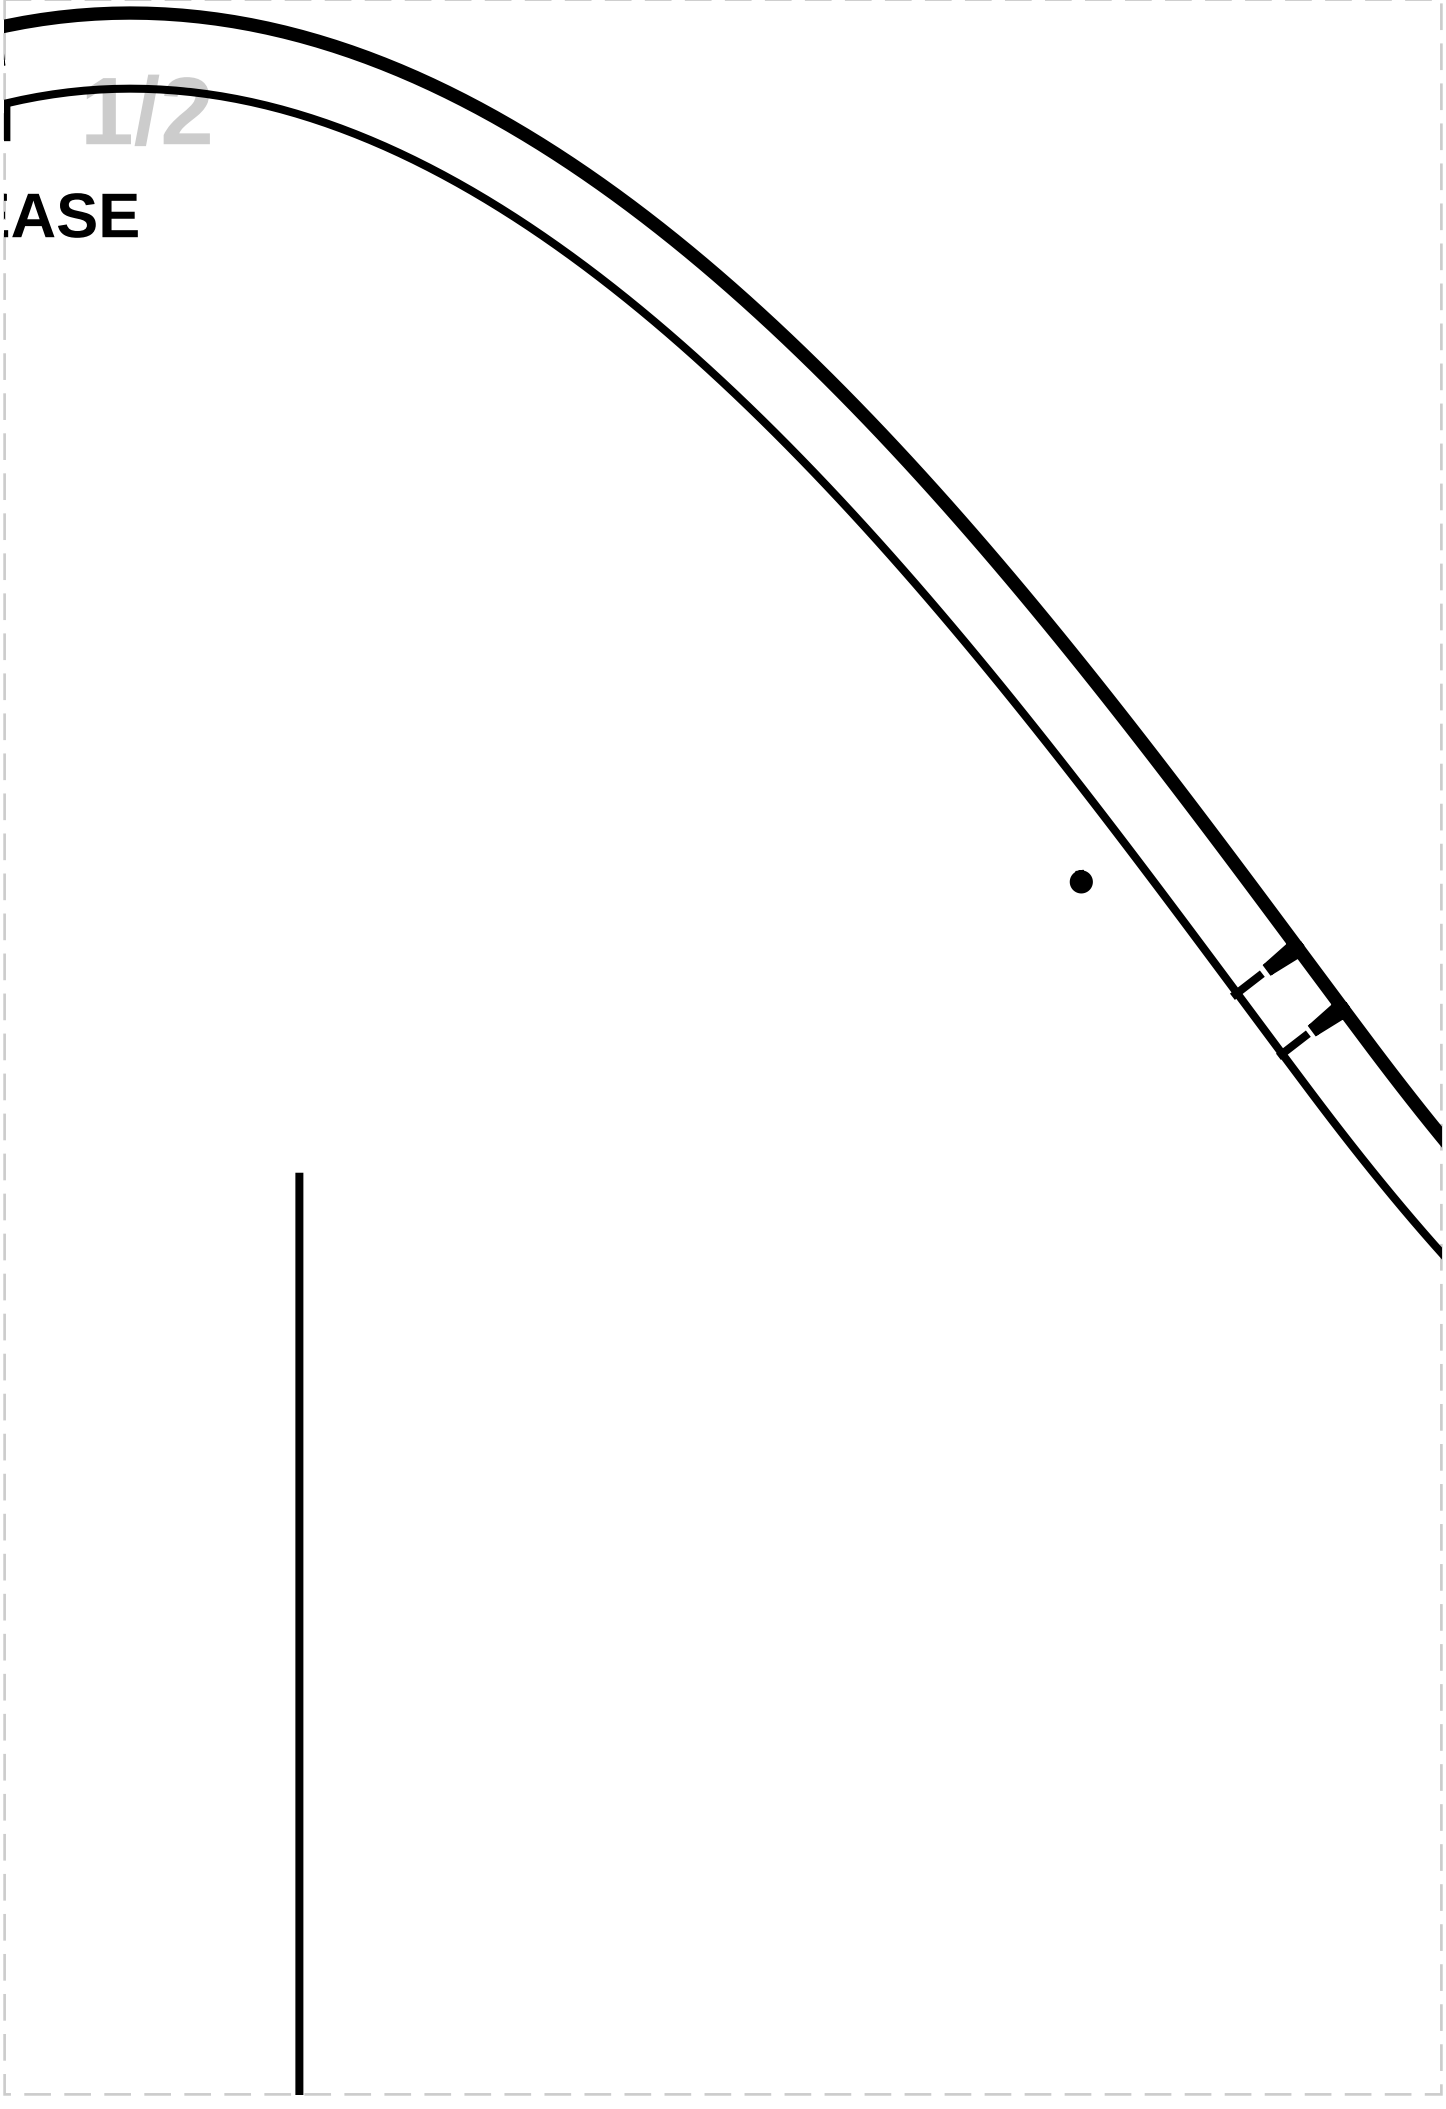

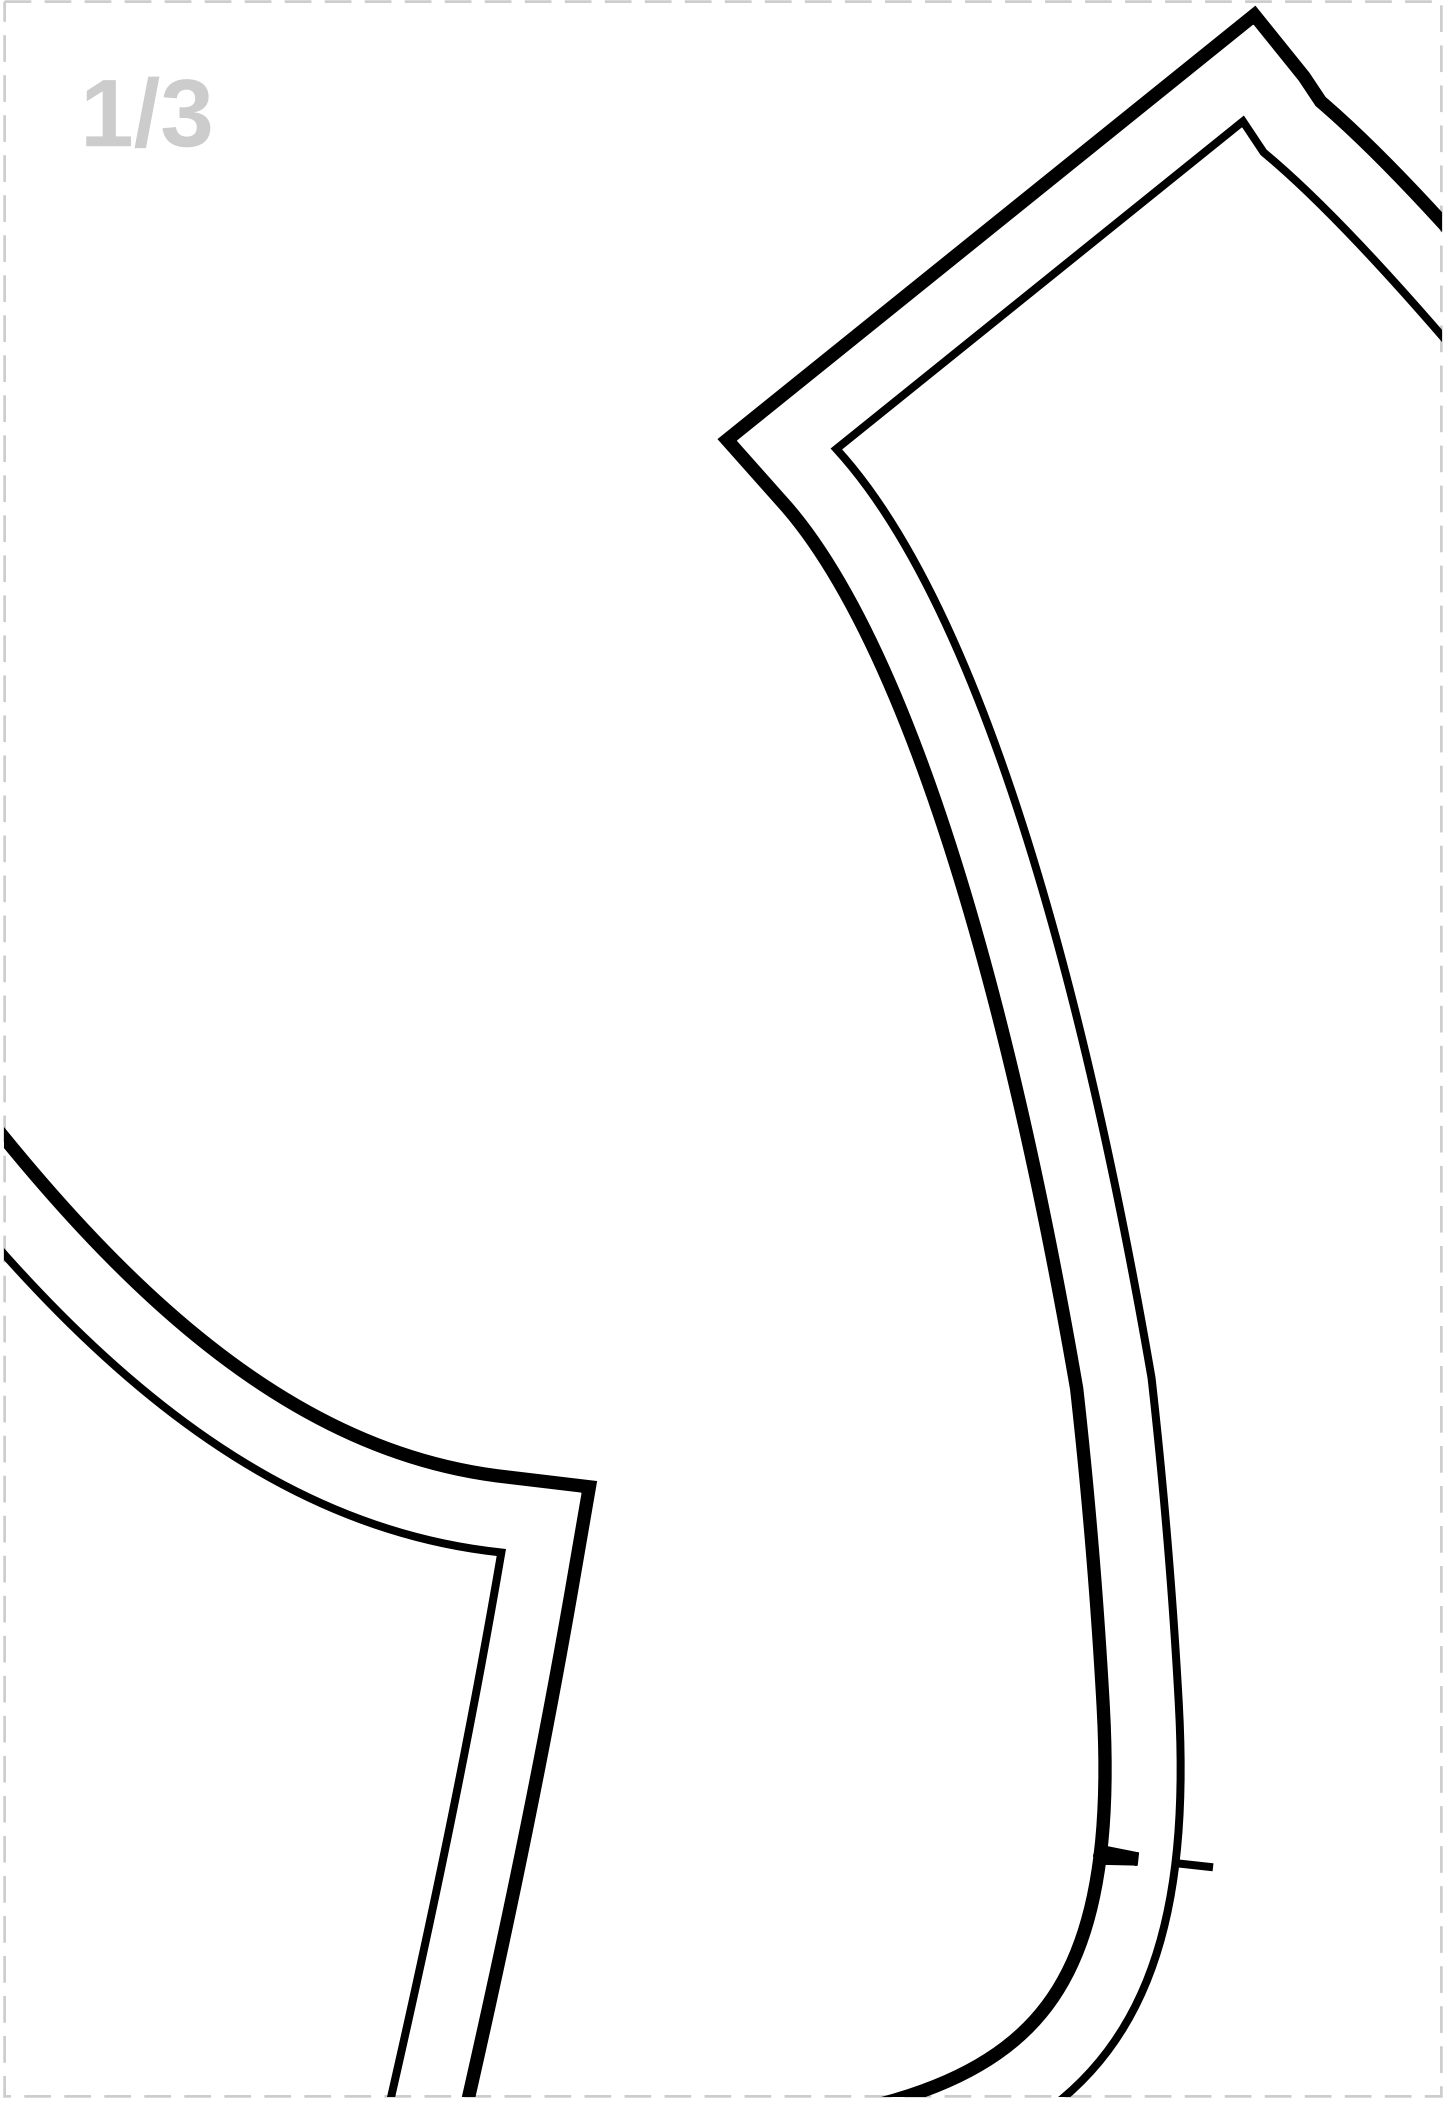

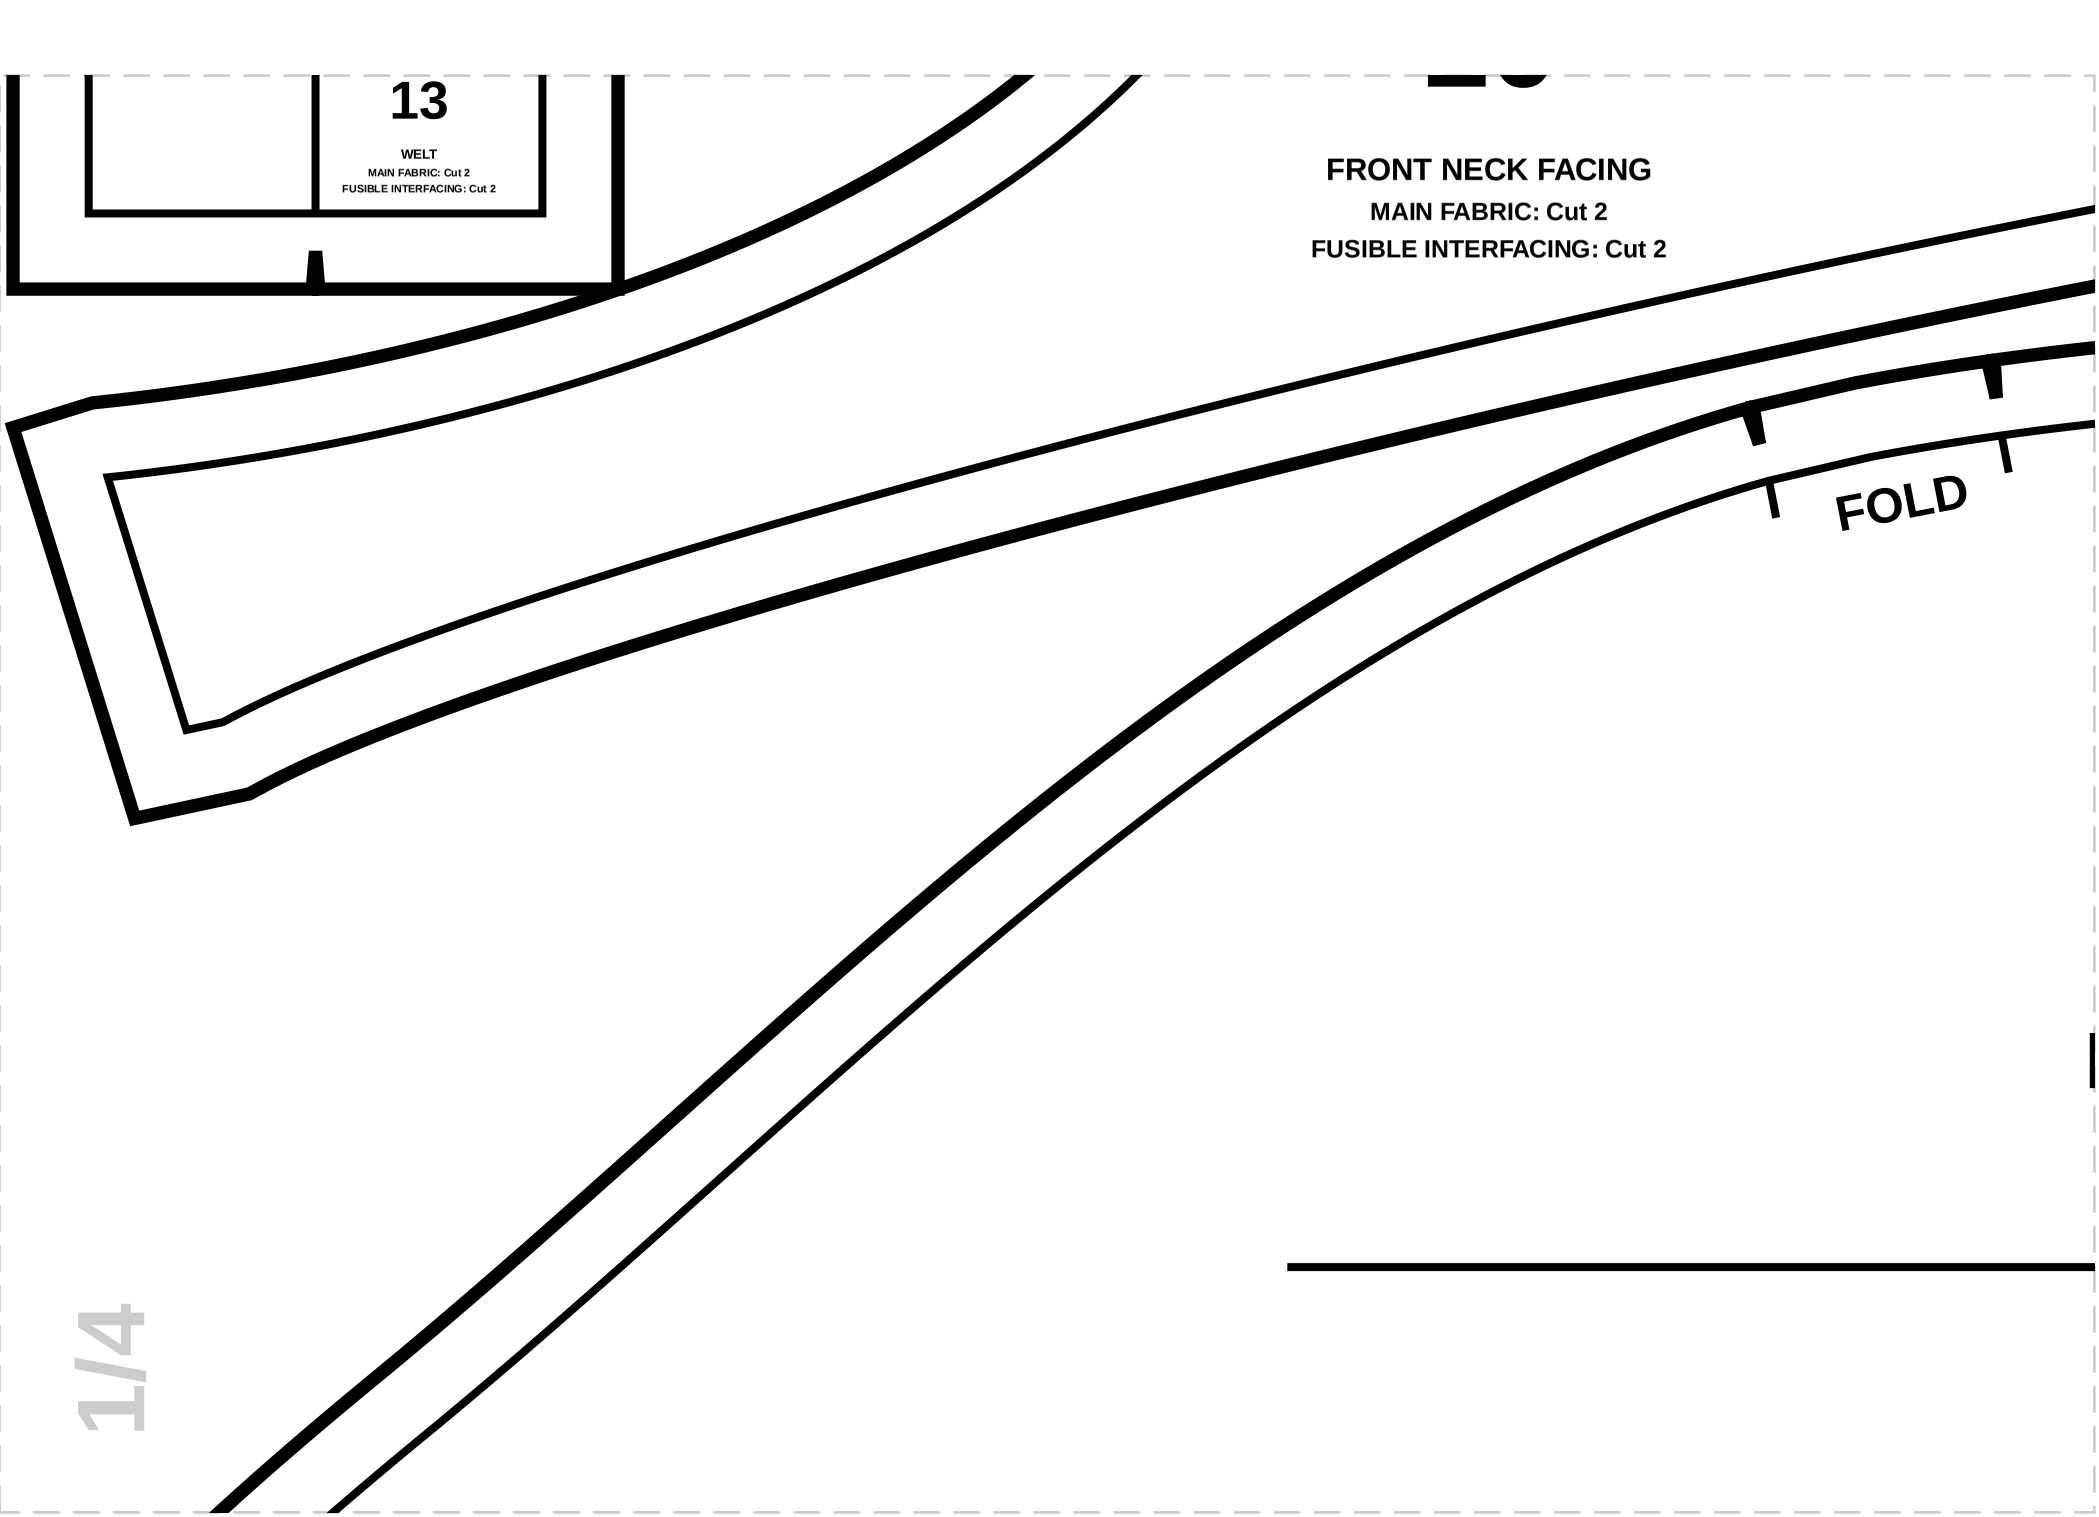
13
WELT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
FRONT NECK FACING
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
FOLD

10

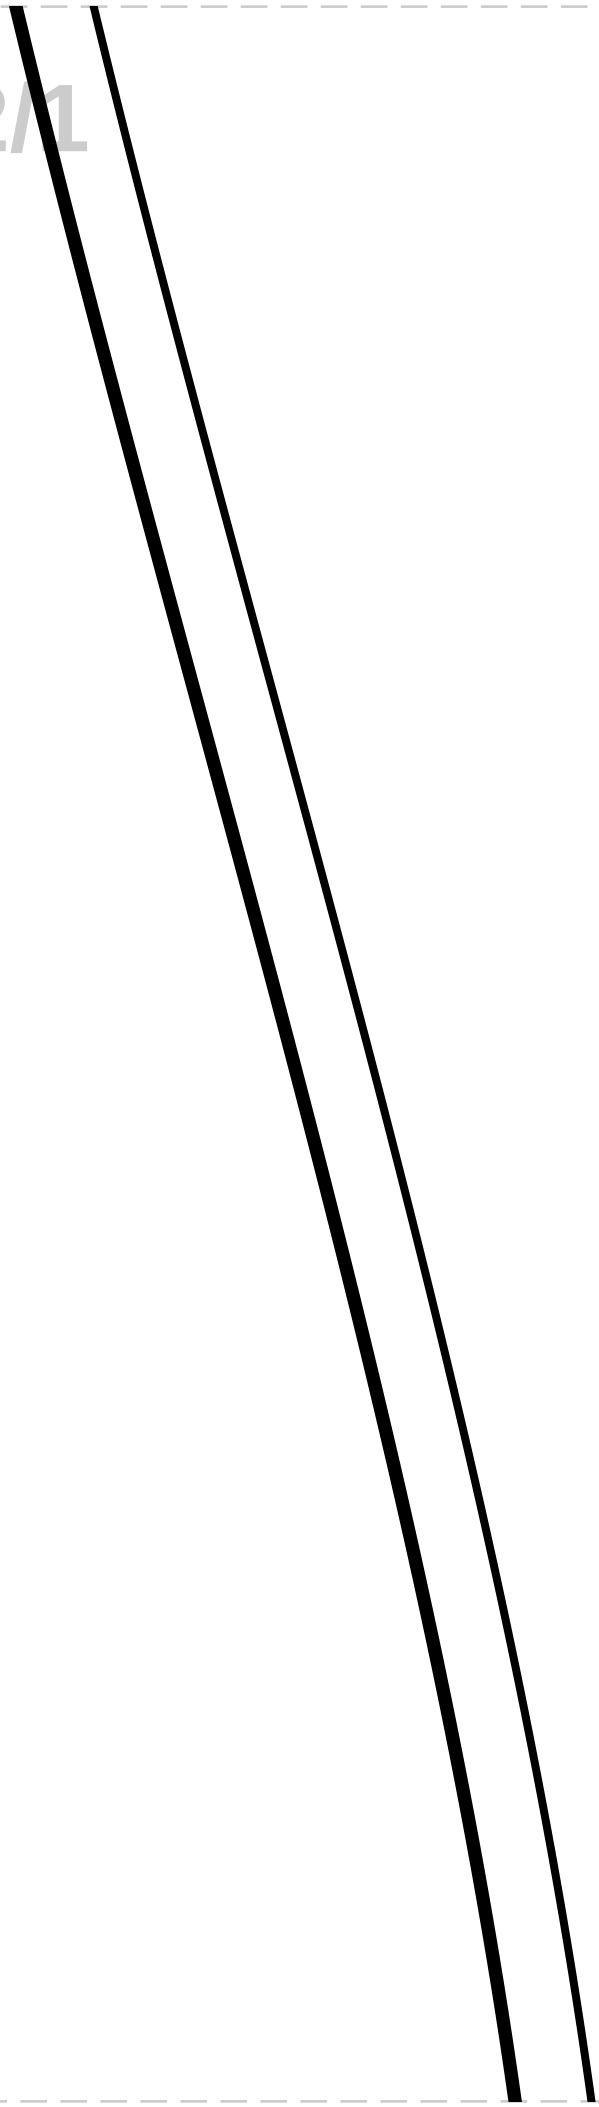



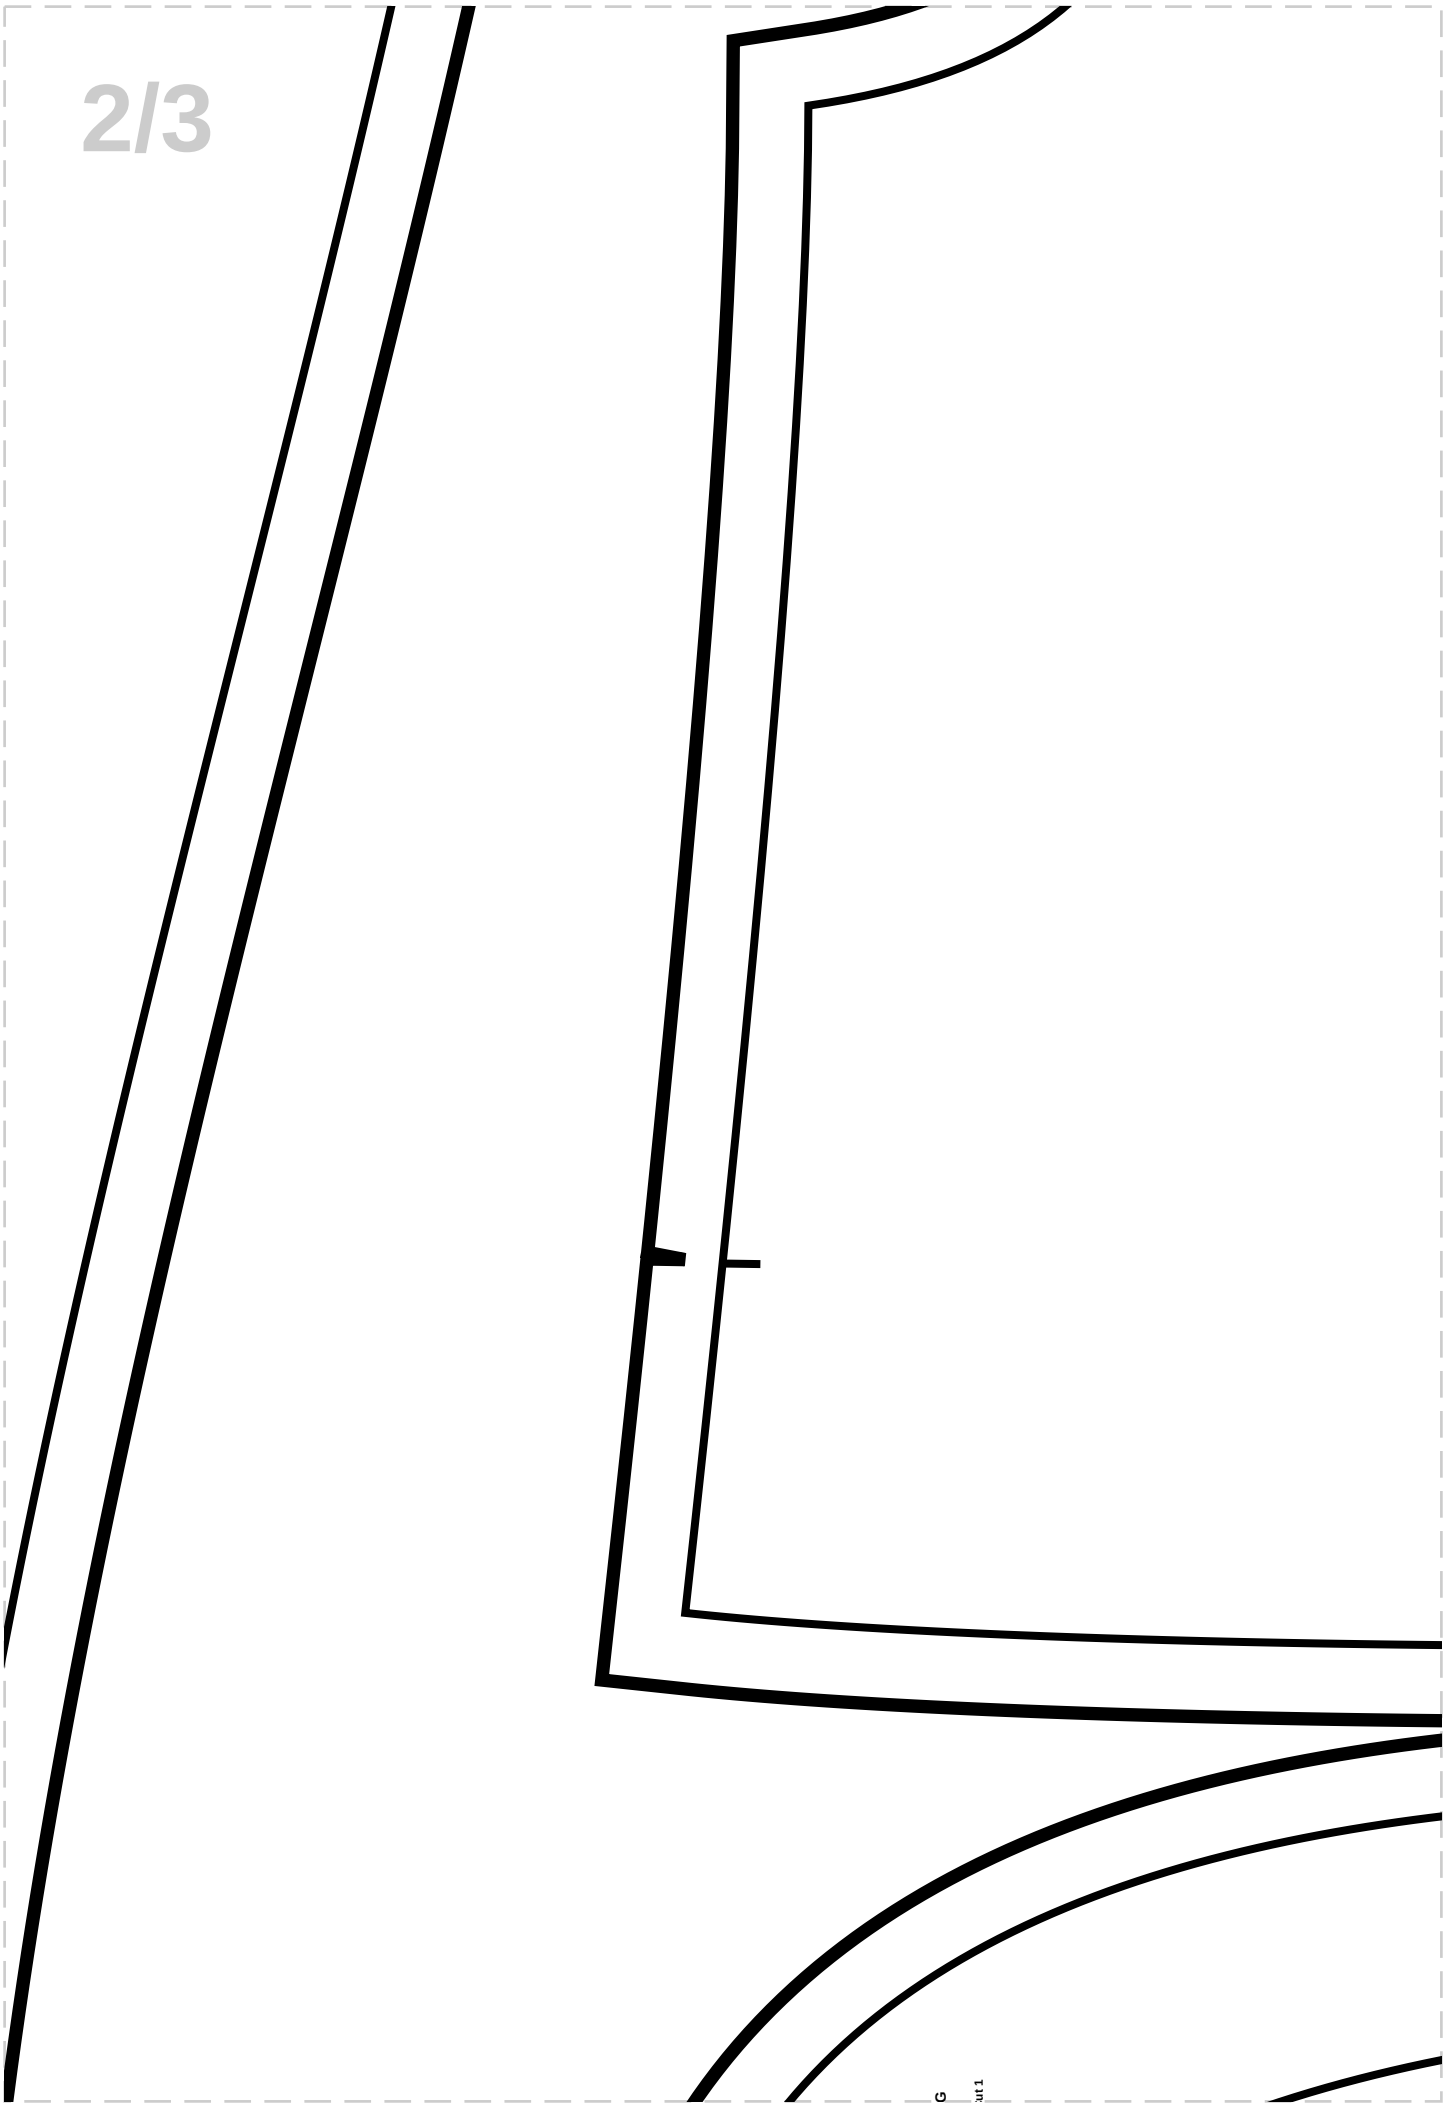

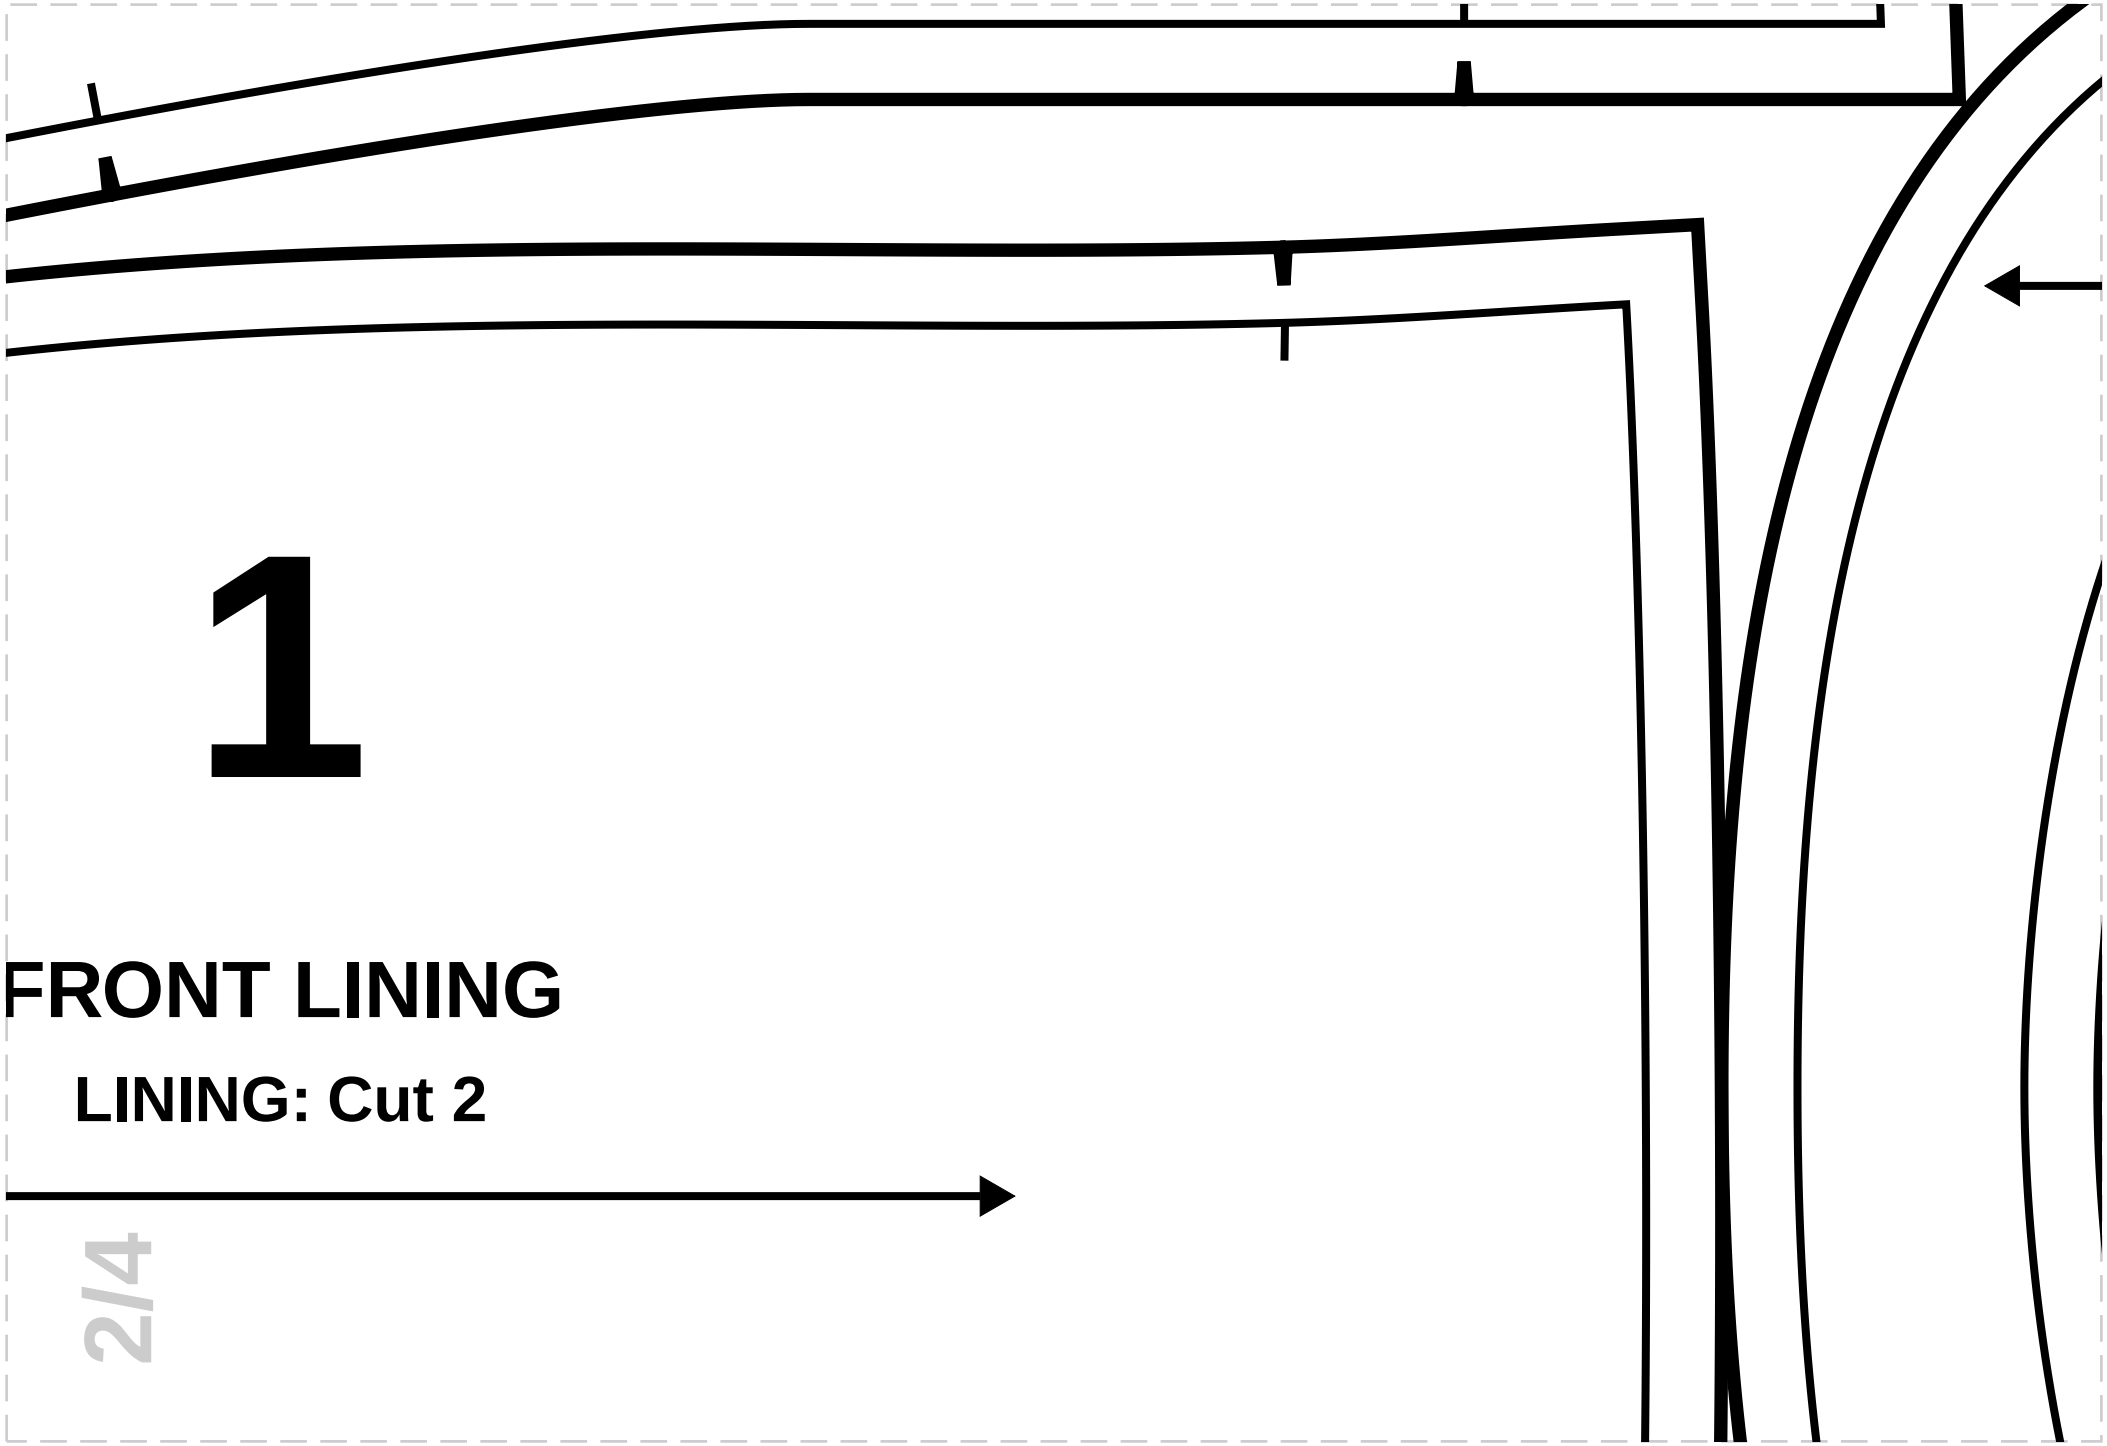

1

FRONT LINING

LINING: Cut 2

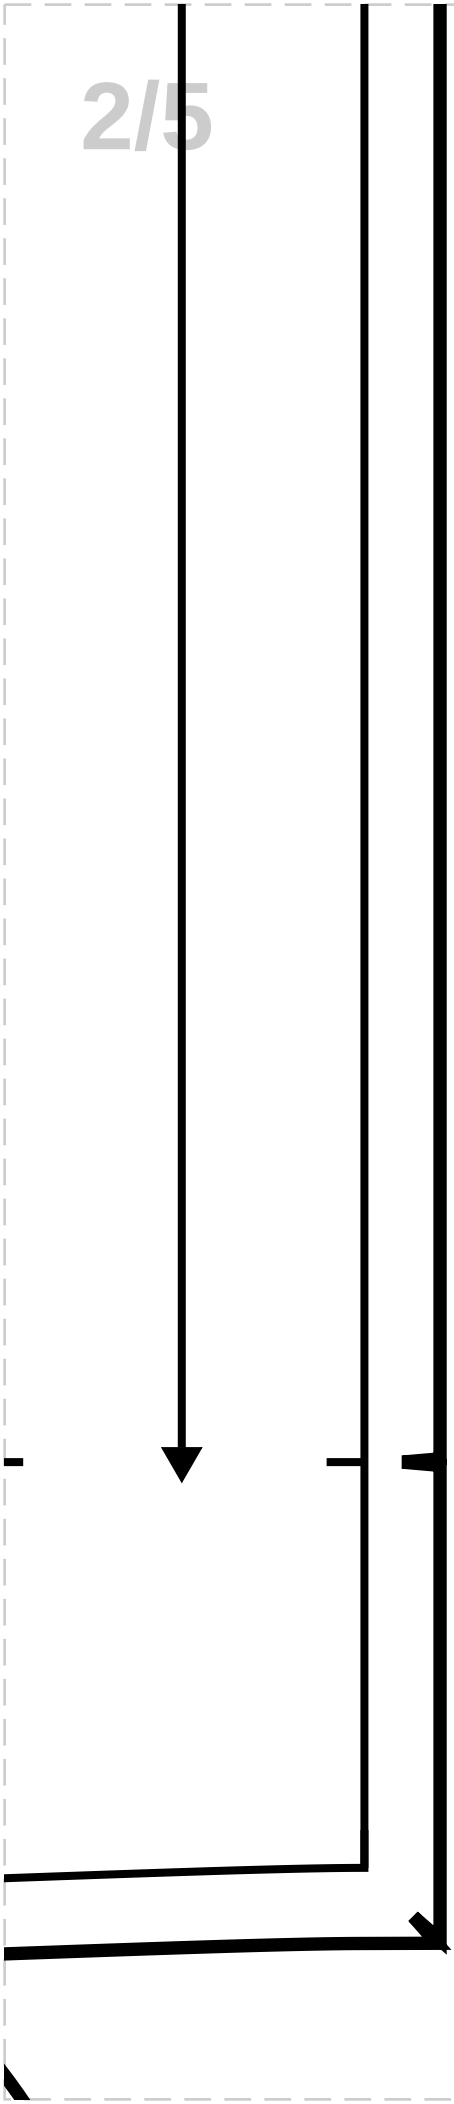

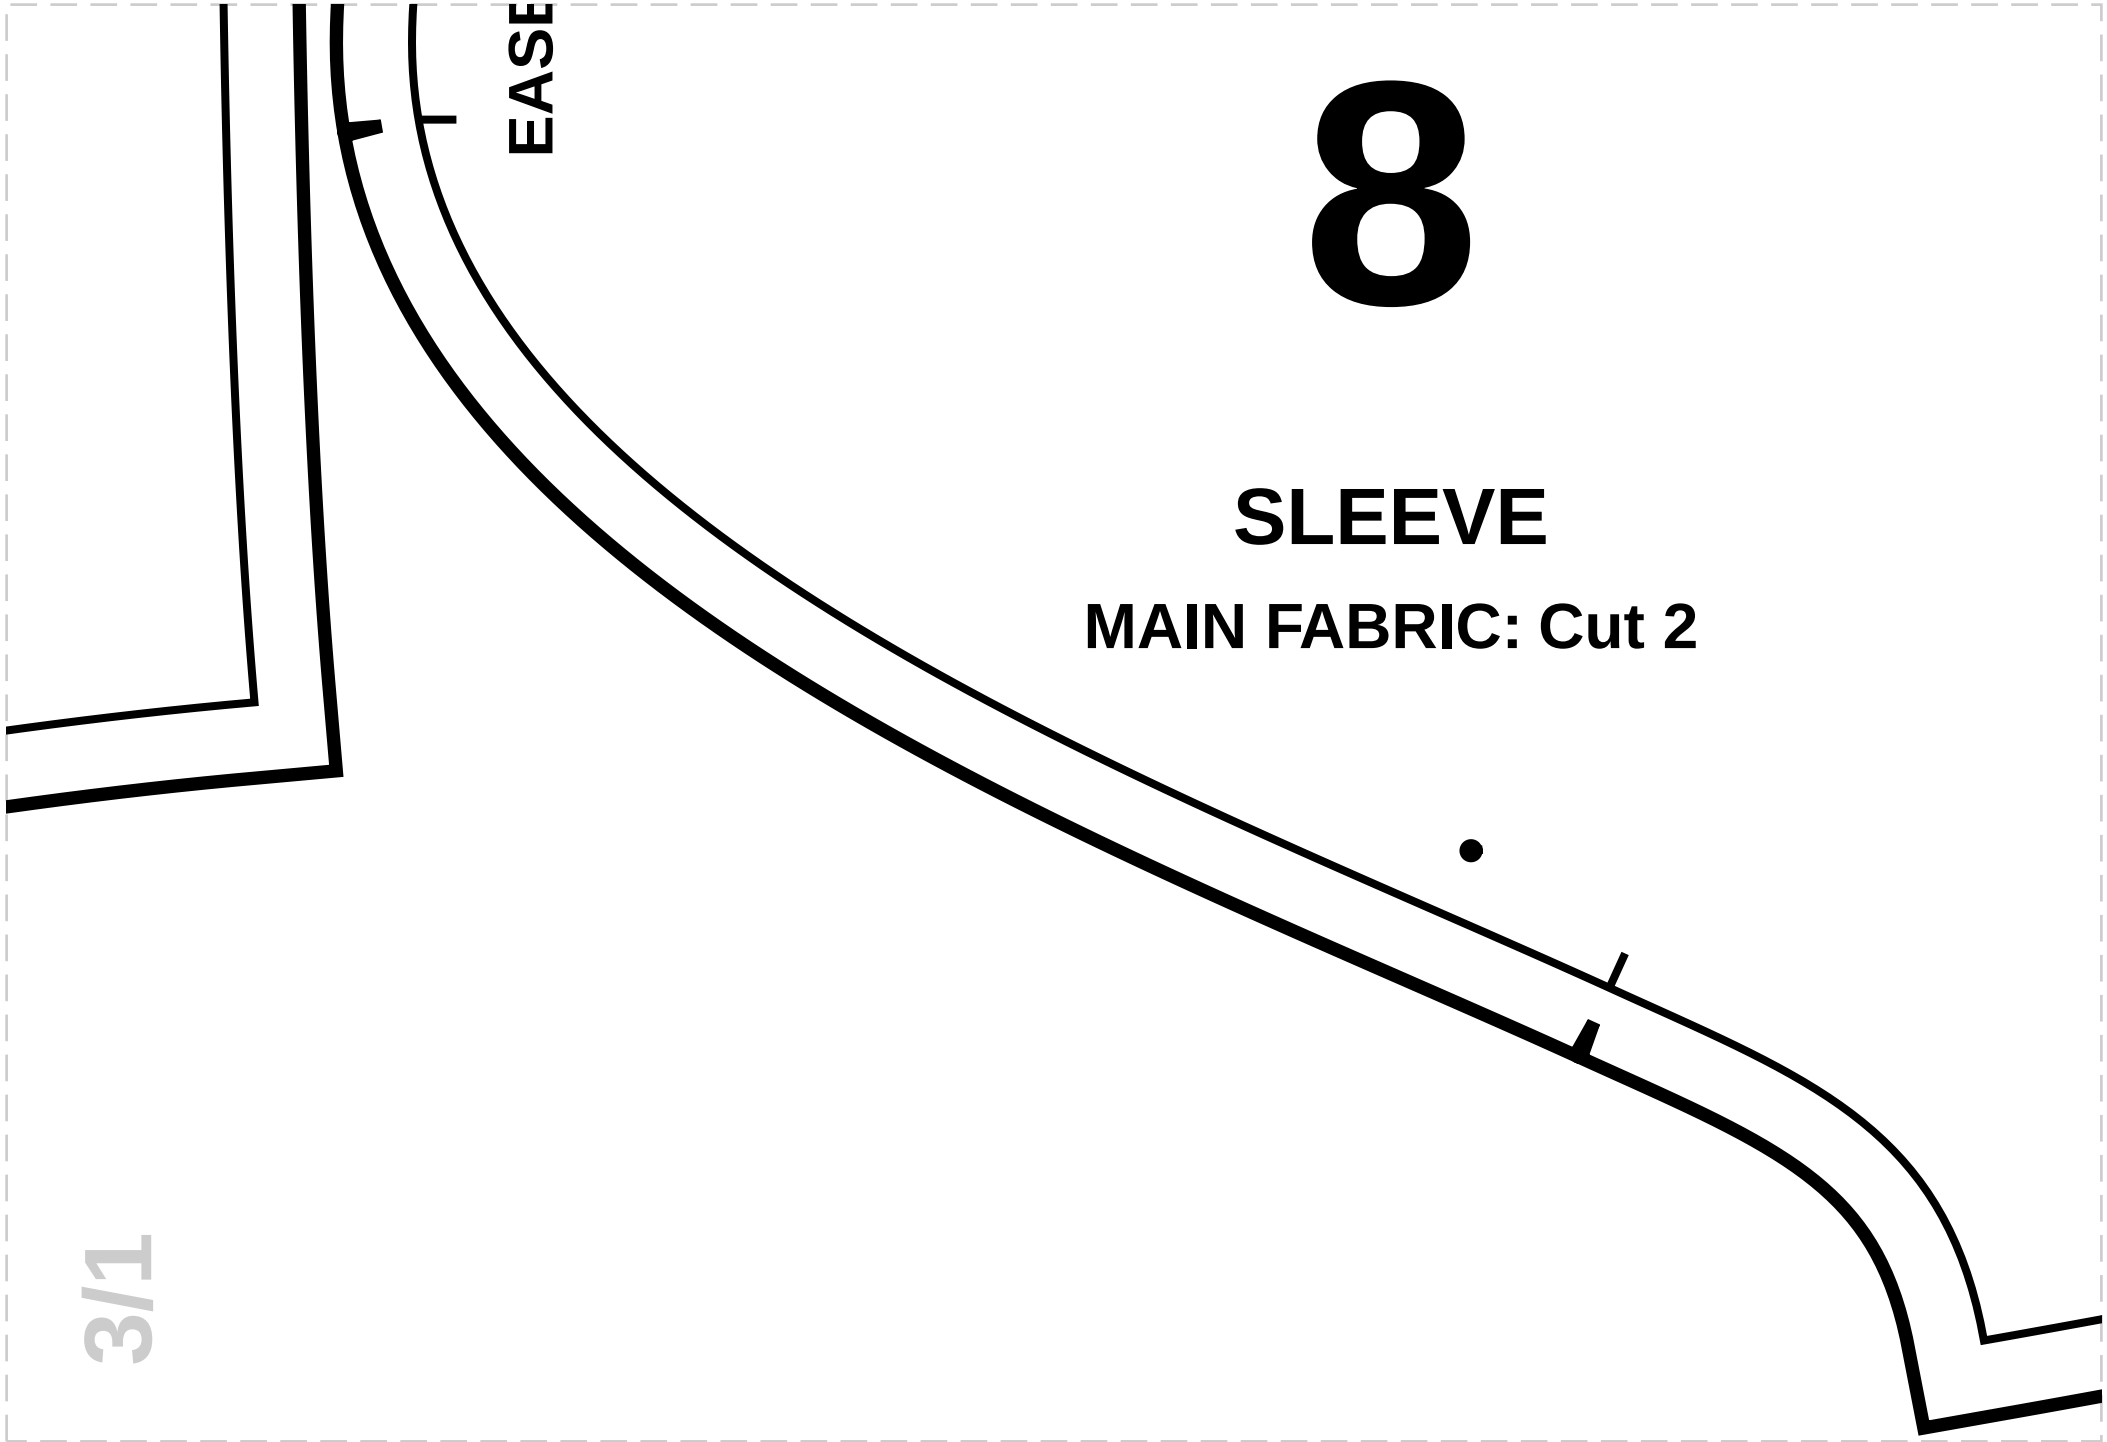

8

SLEEVE

MAIN FABRIC: Cut 2

3/1

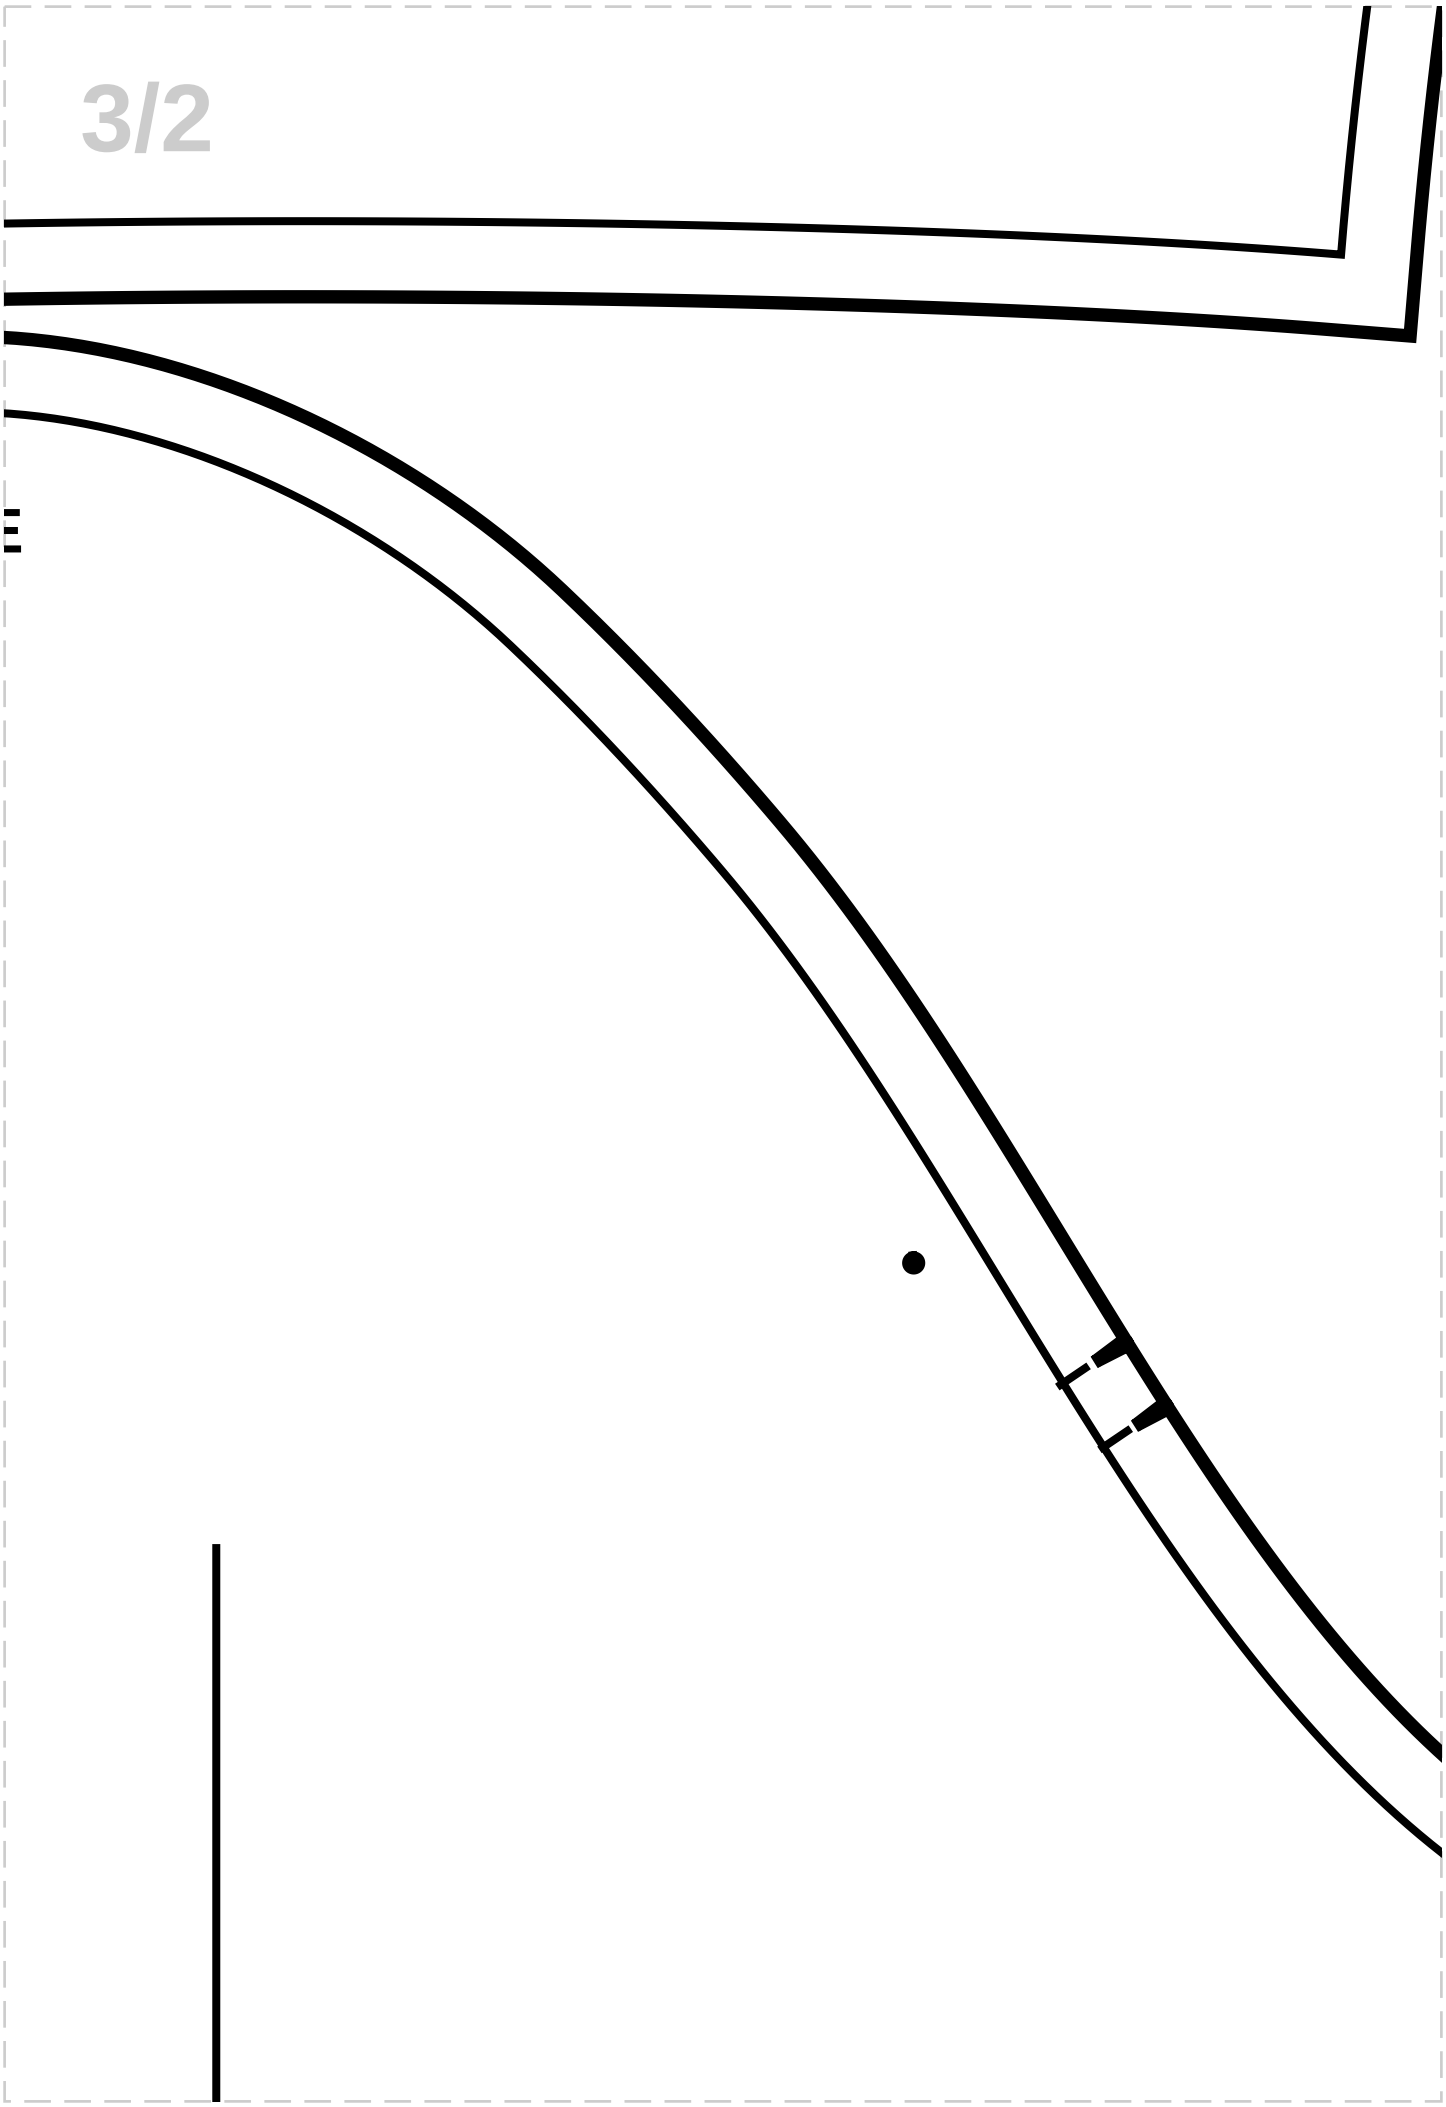

11
BACK NECK FACIN
MAIN FABRIC: Cut 1
FUSIBLE INTERFACING: C
5

CENTER BACK LINING

LINING: Cut 1

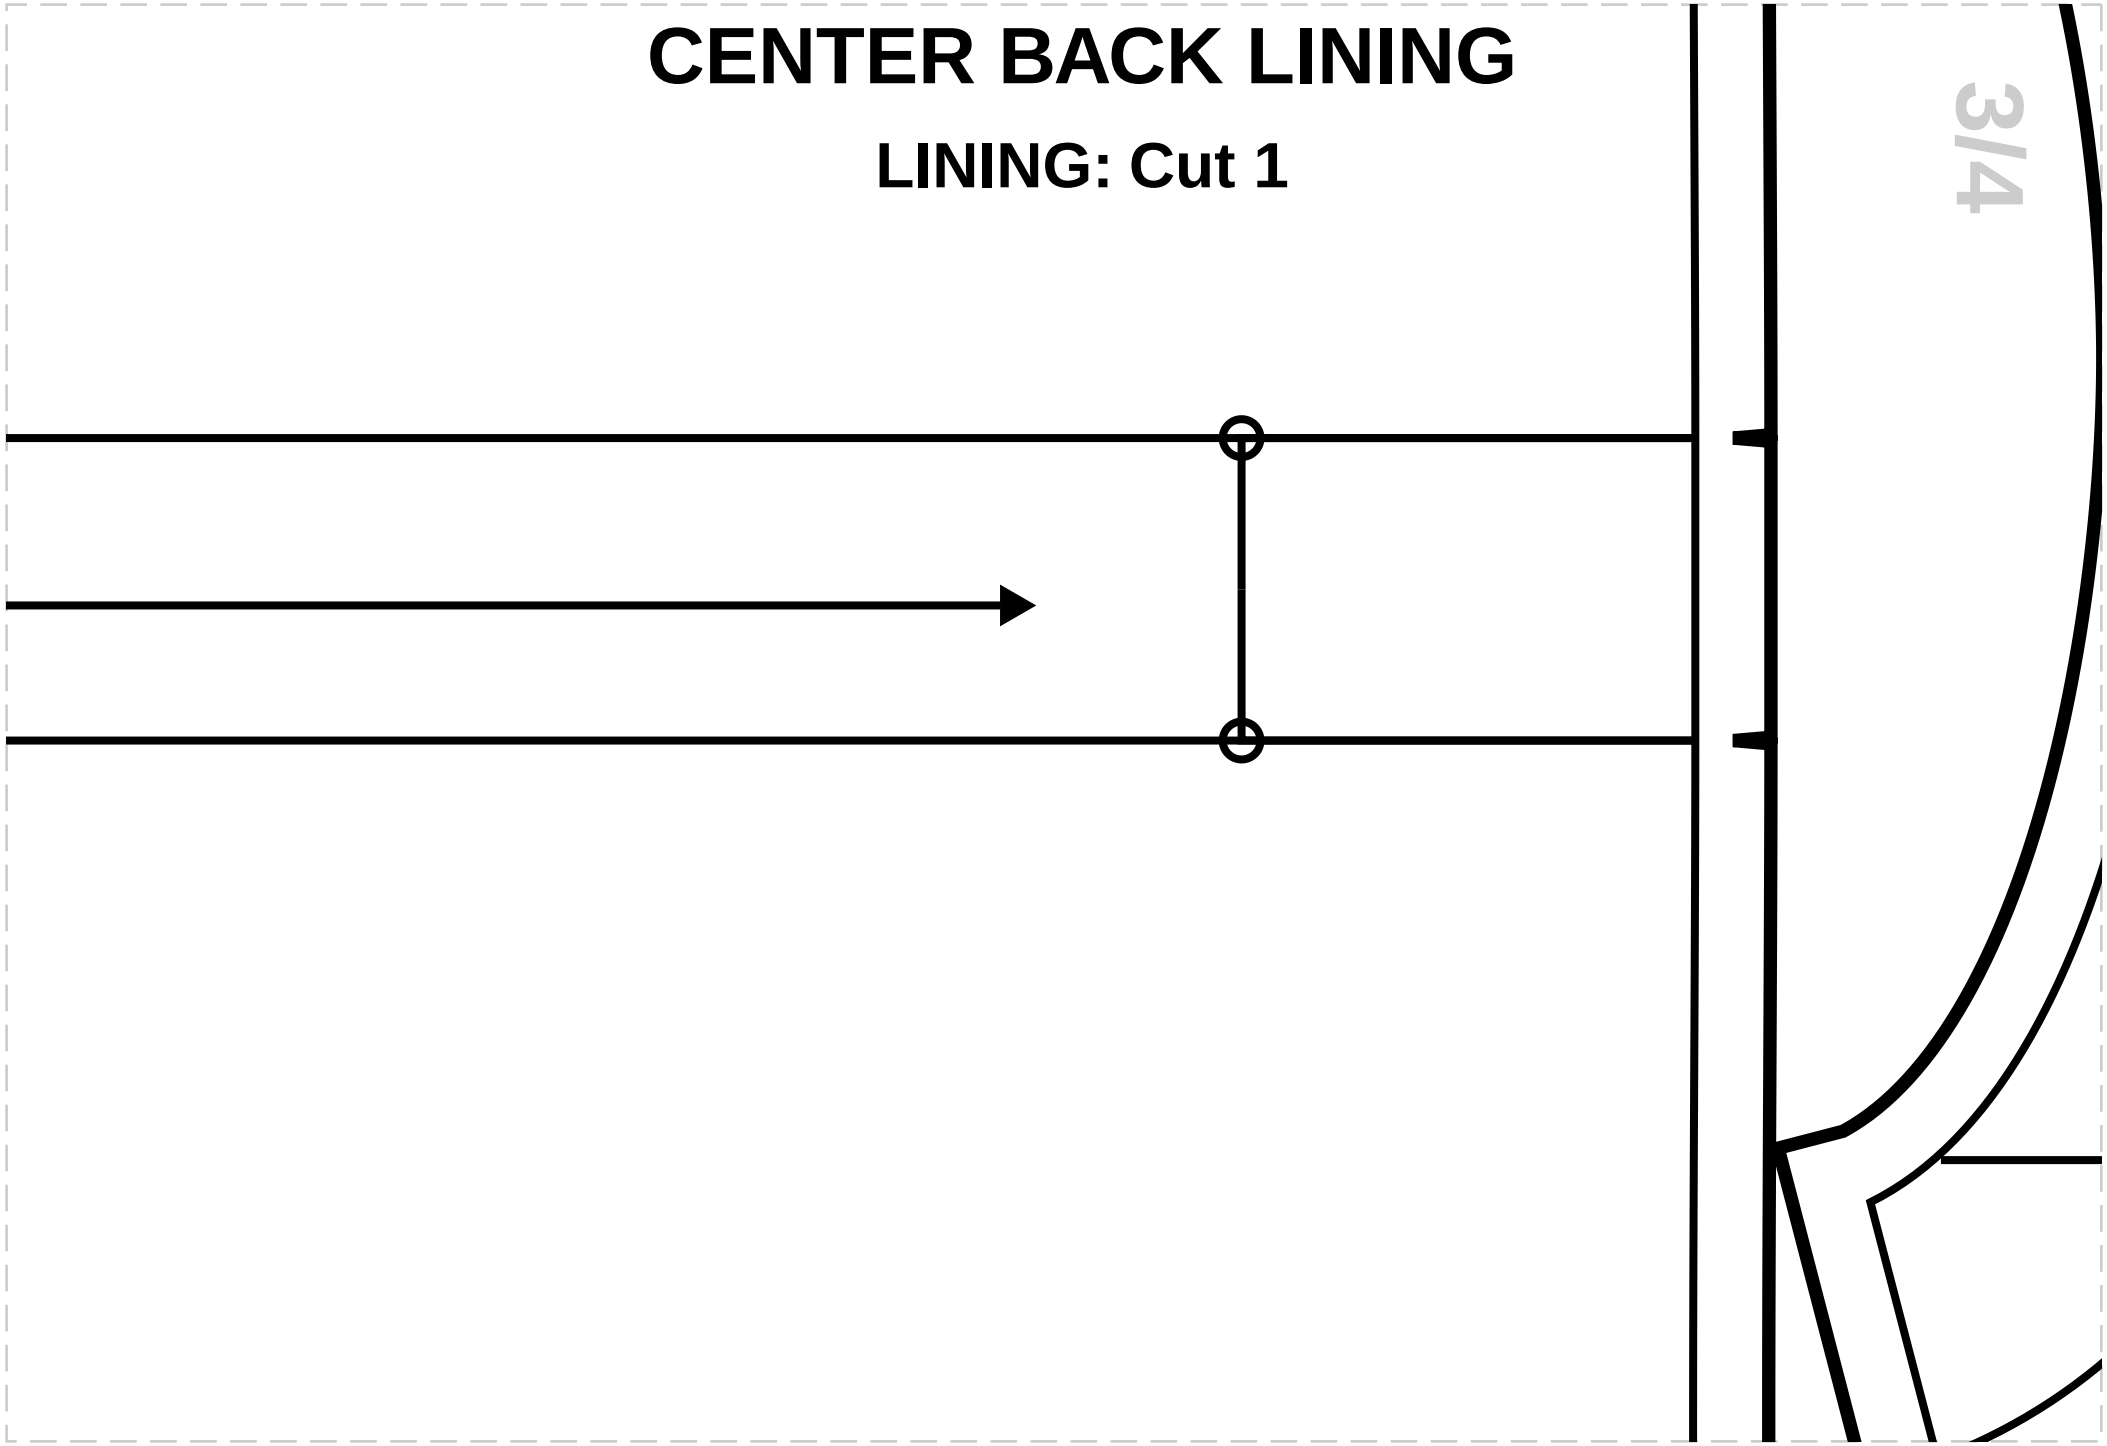

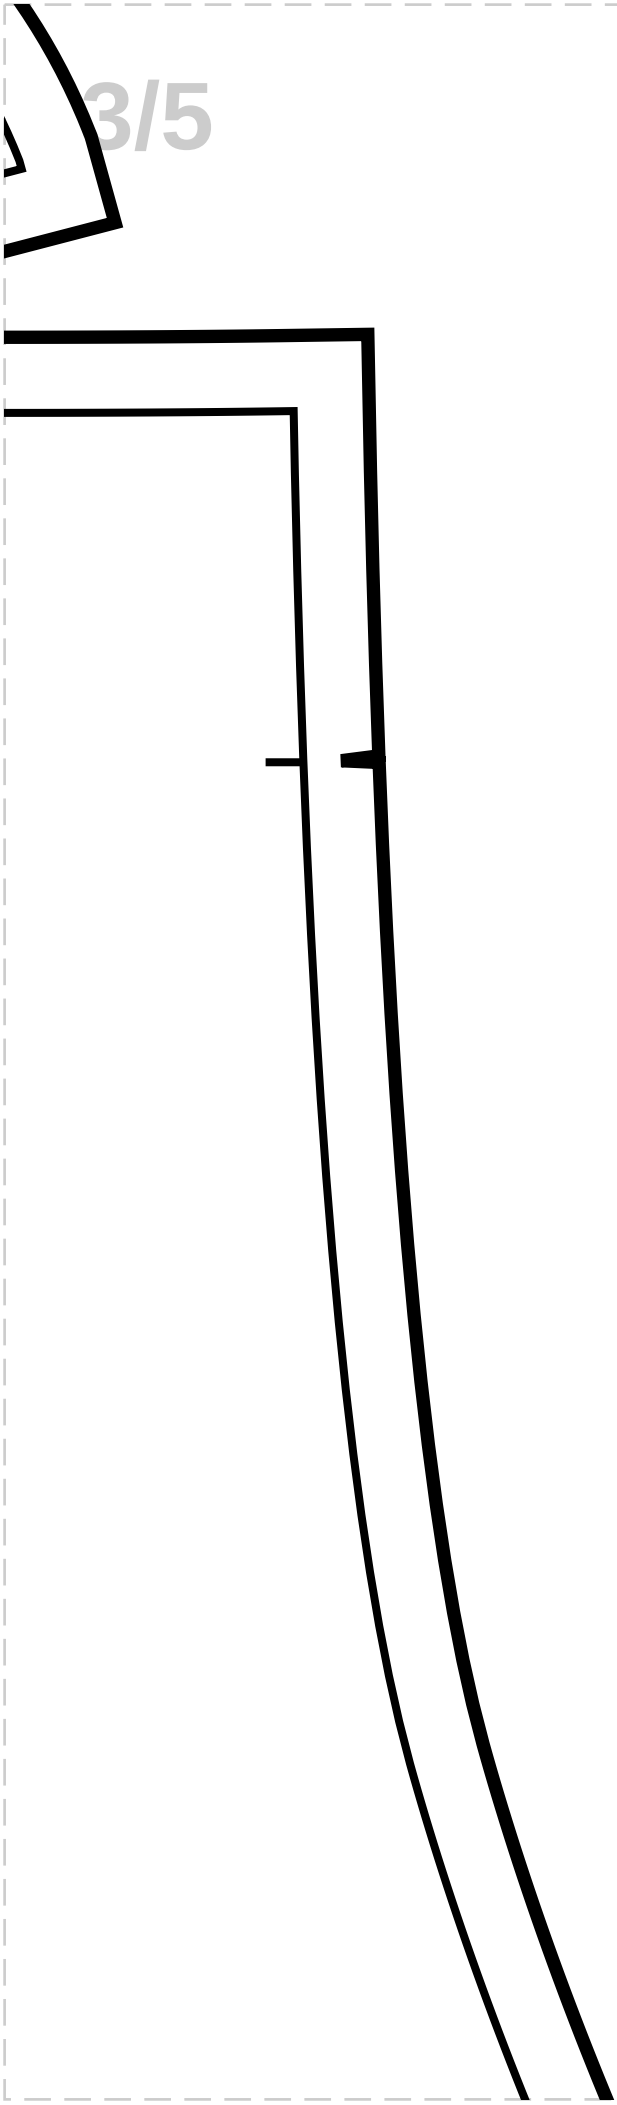

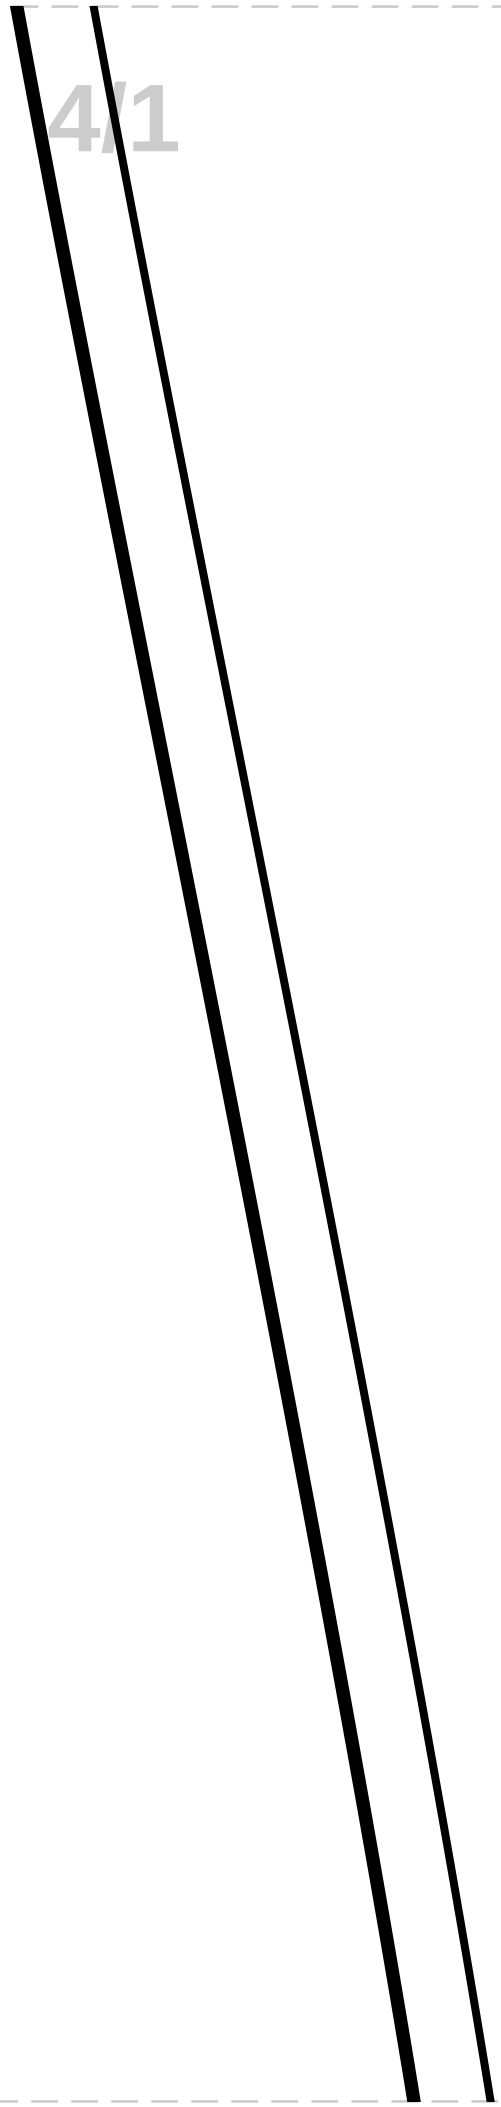

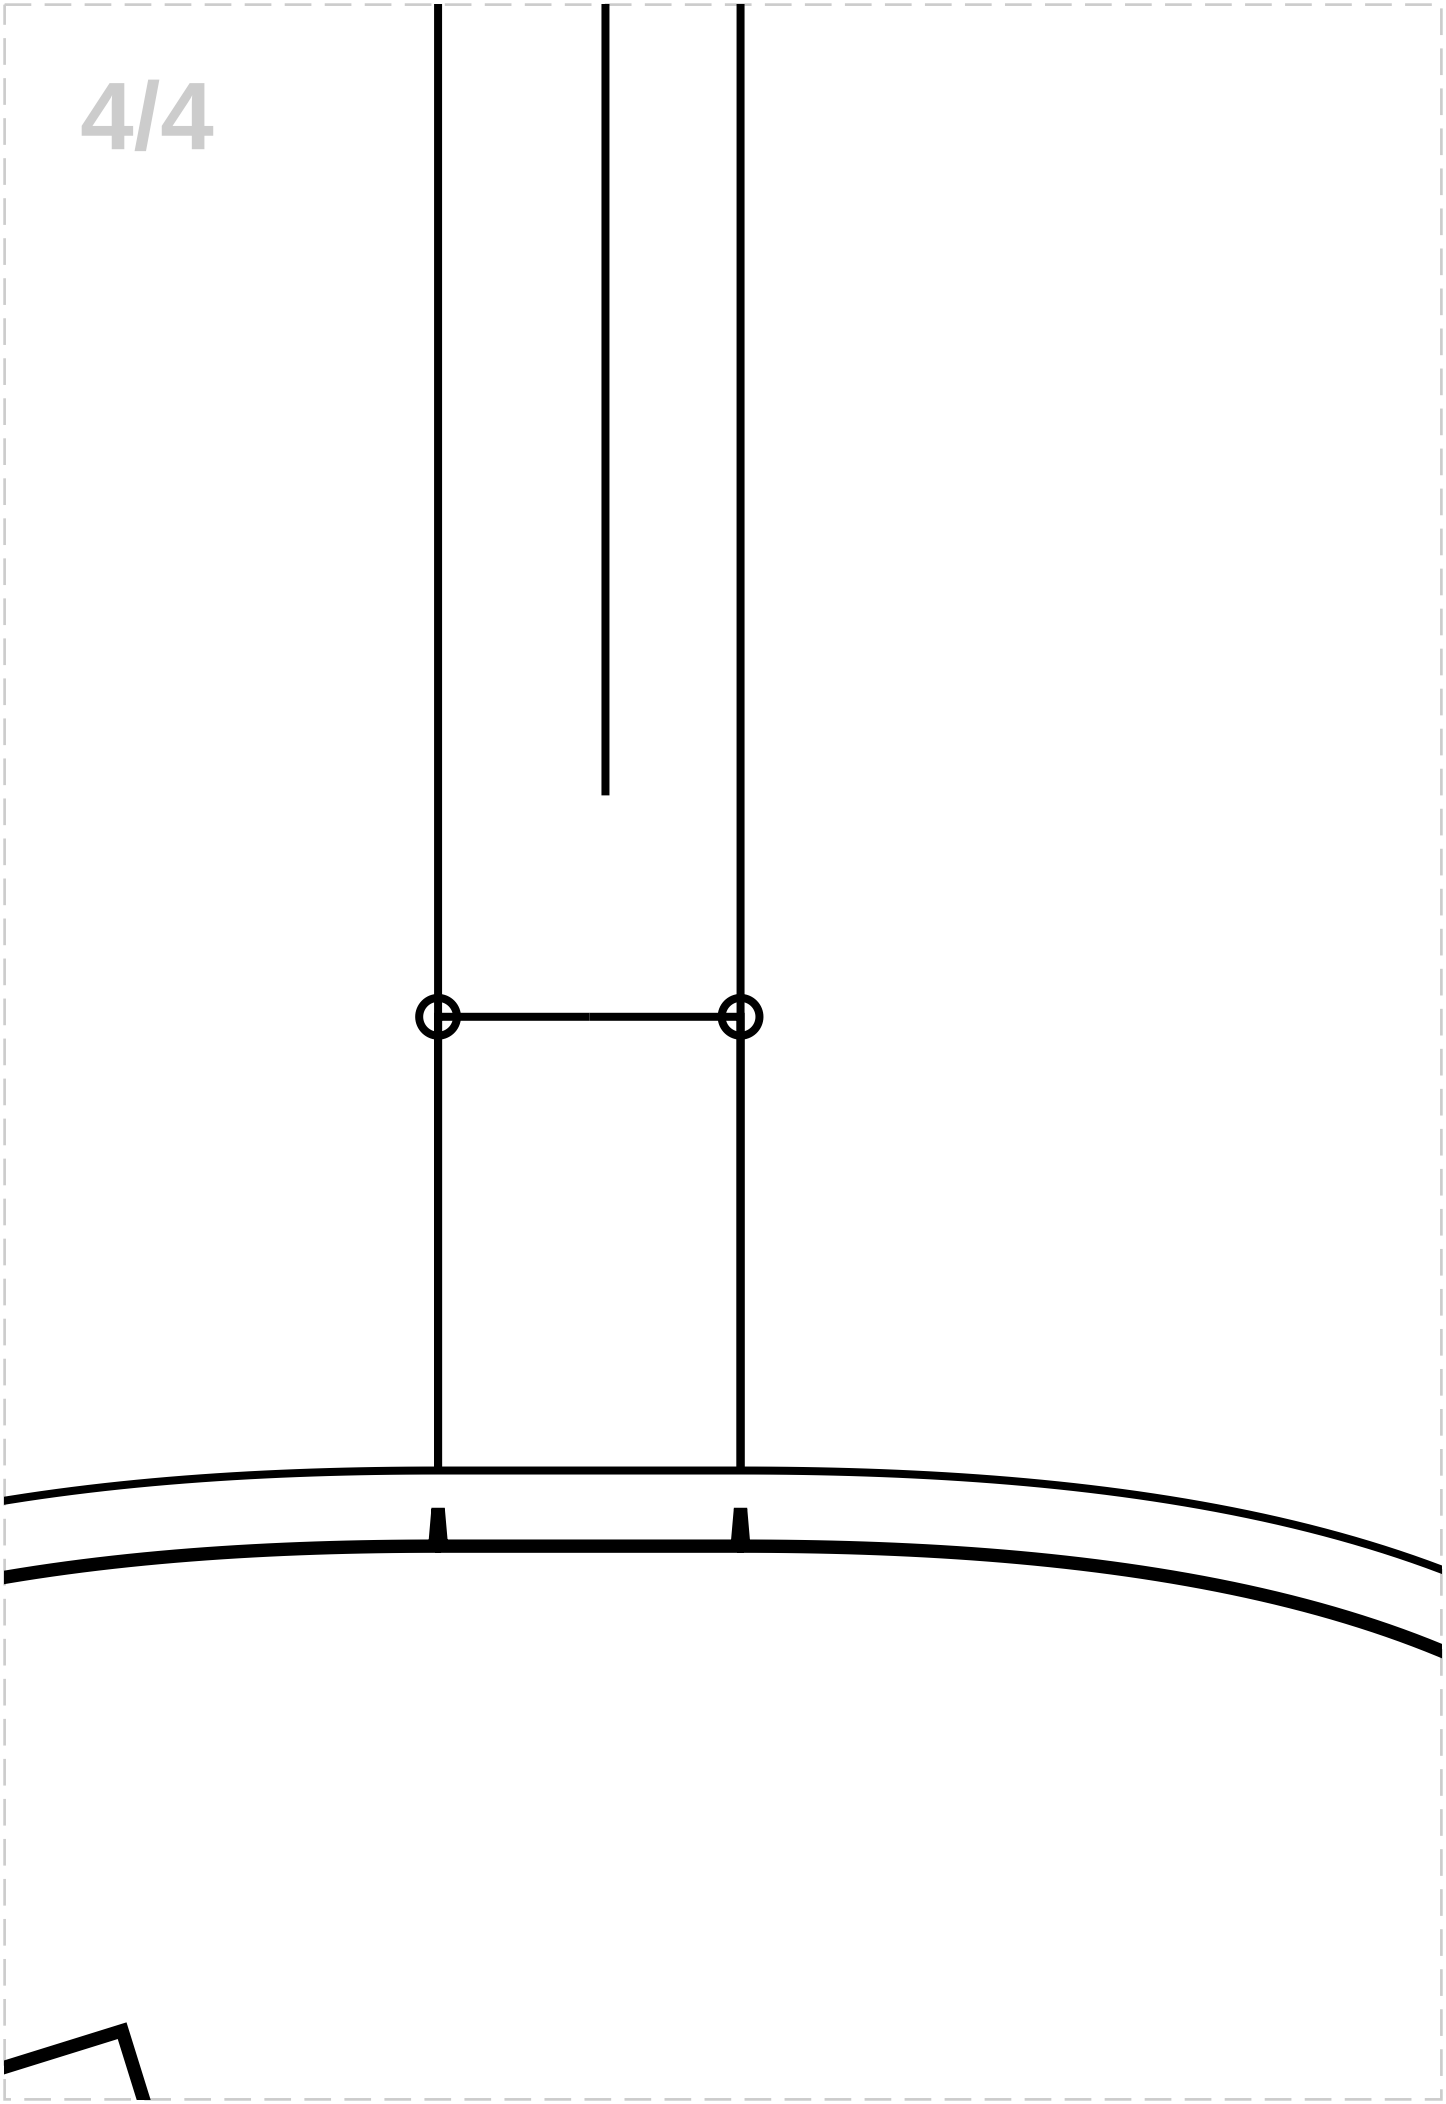

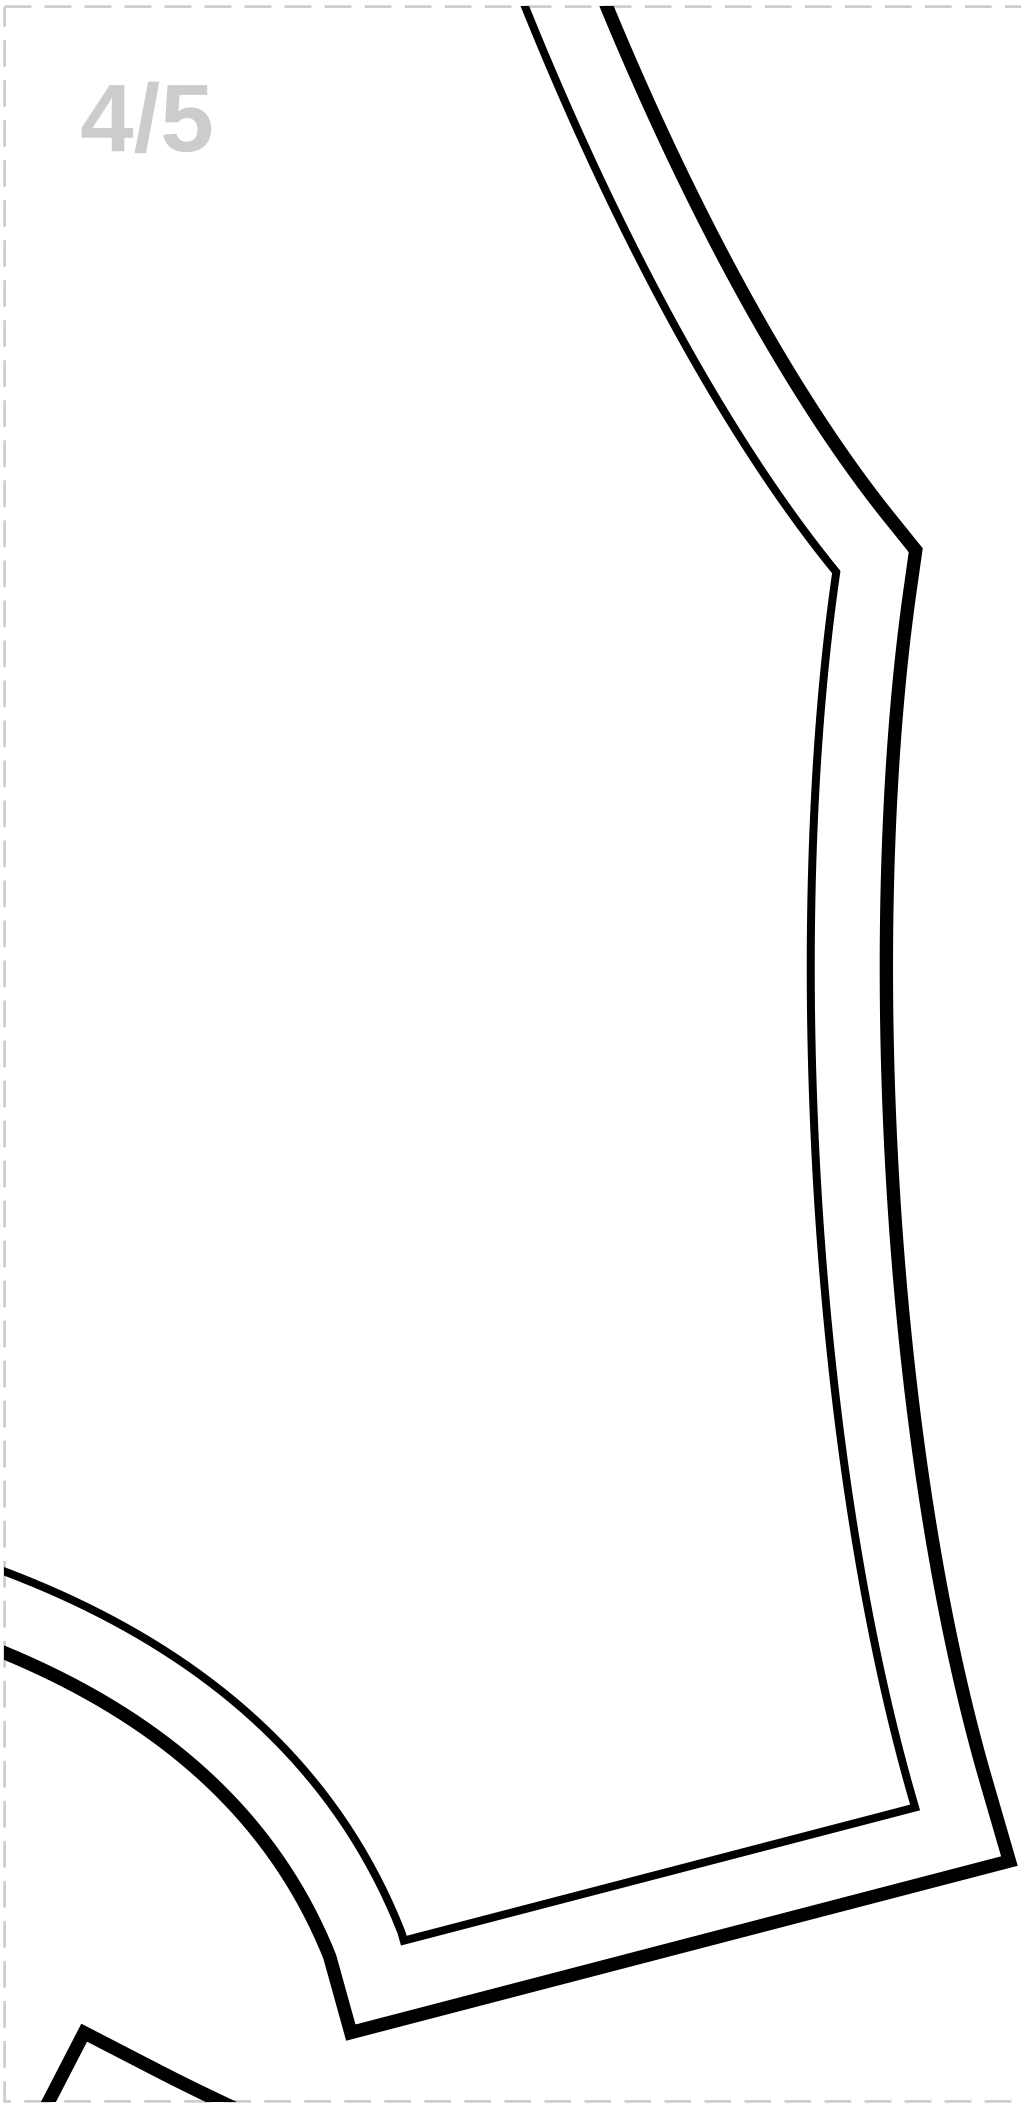

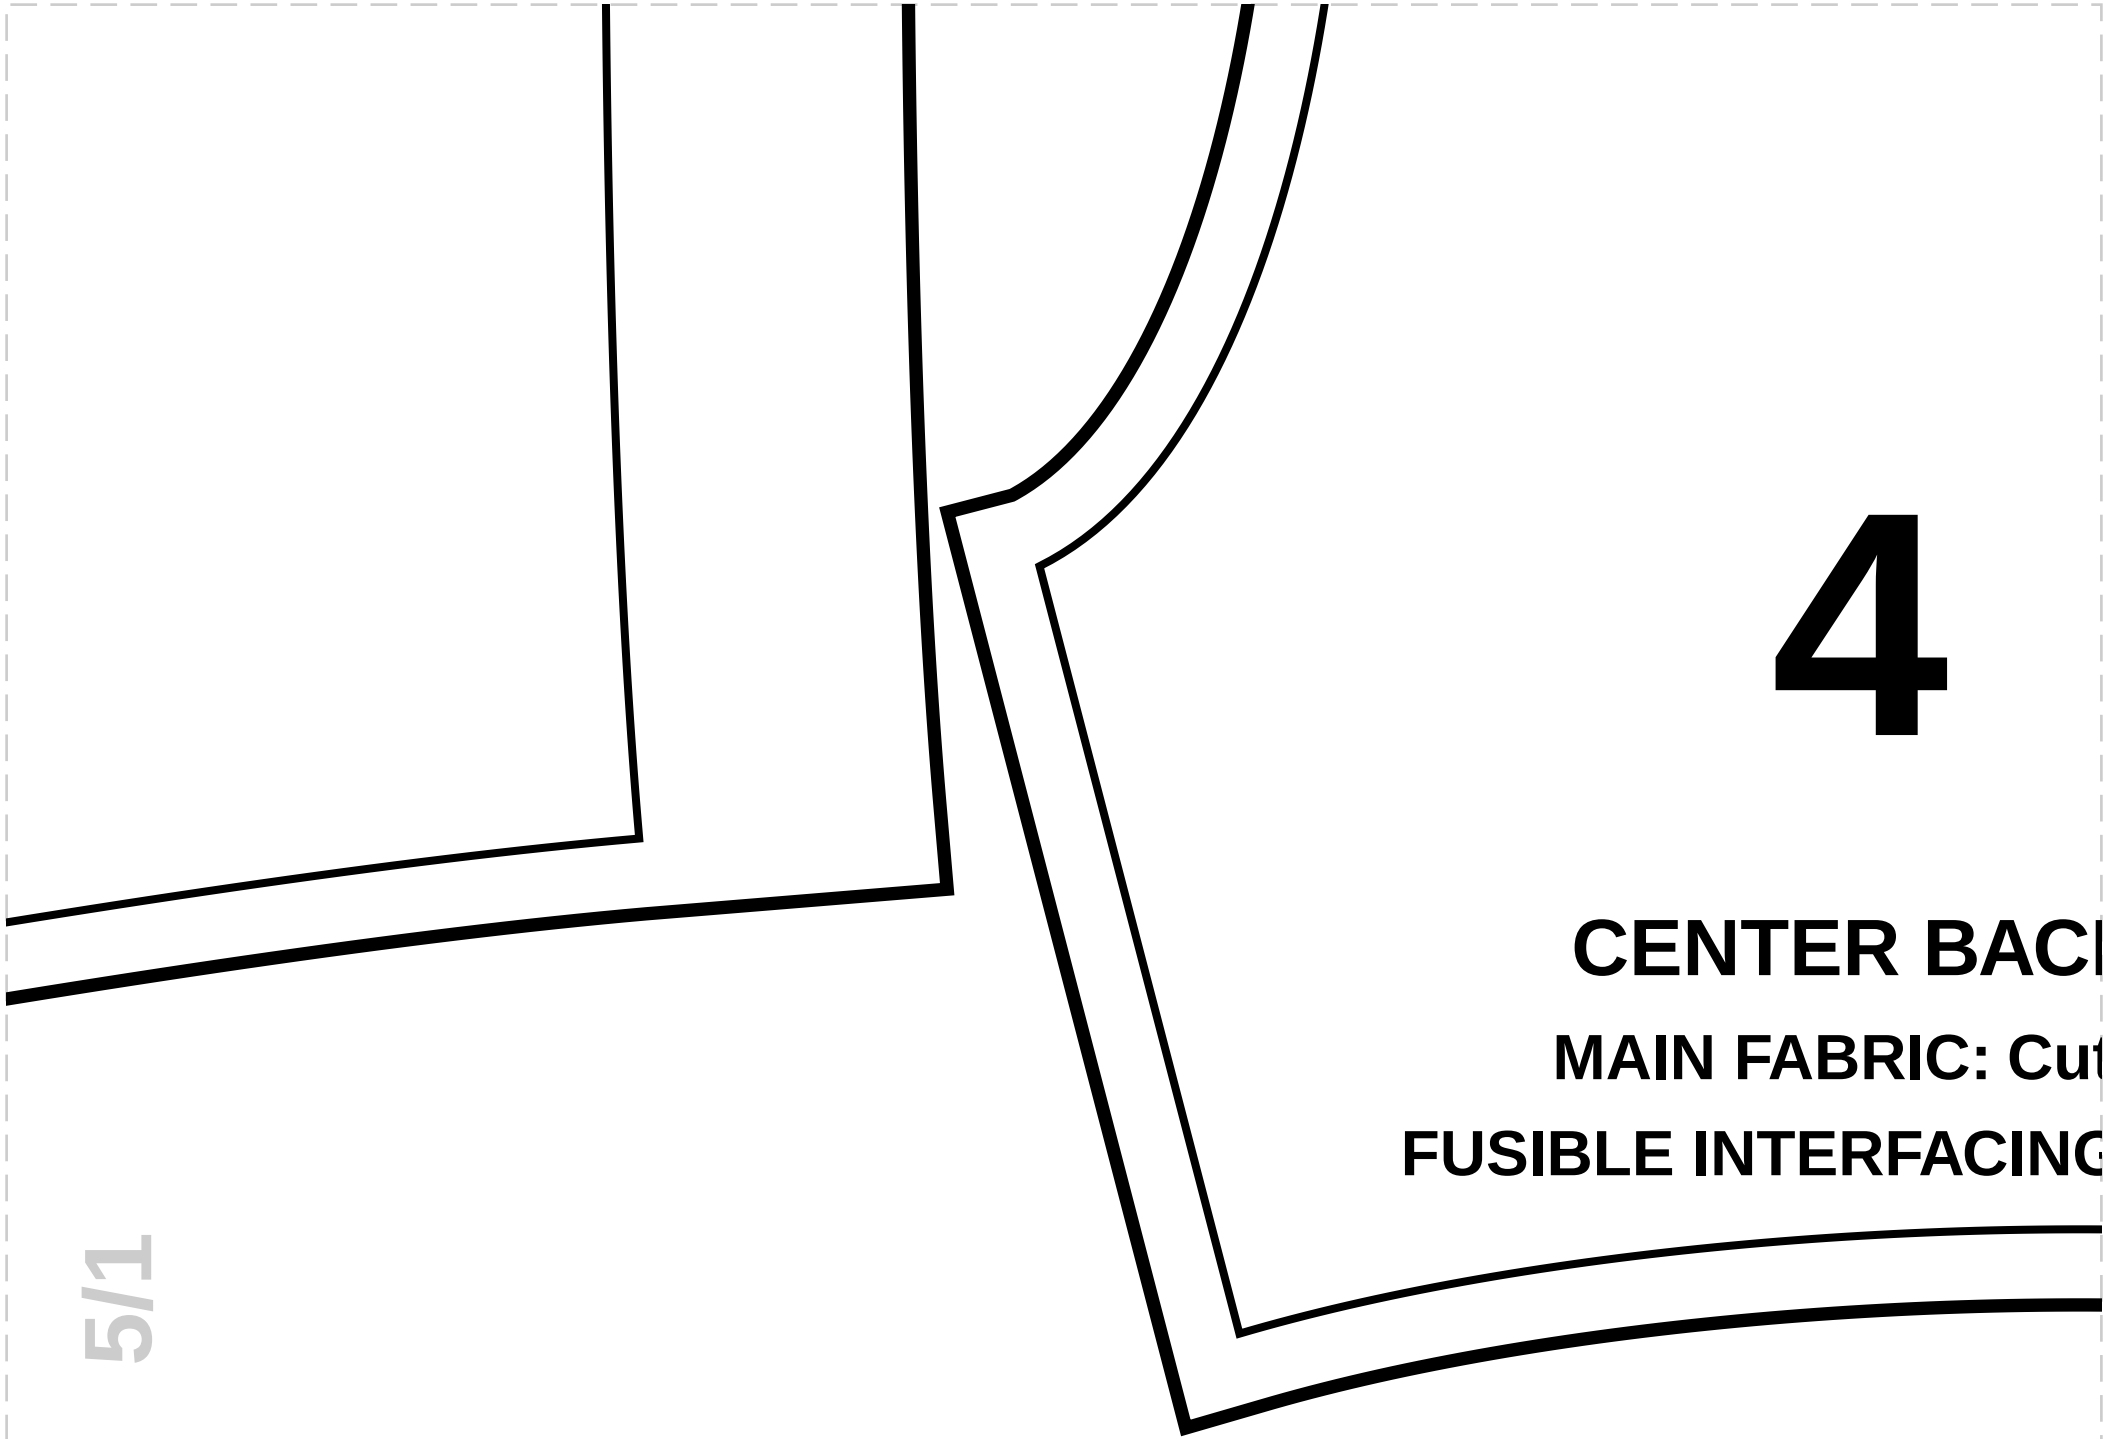

4

CENTER BACI

MAIN FABRIC: Cut

FUSIBLE INTERFACING

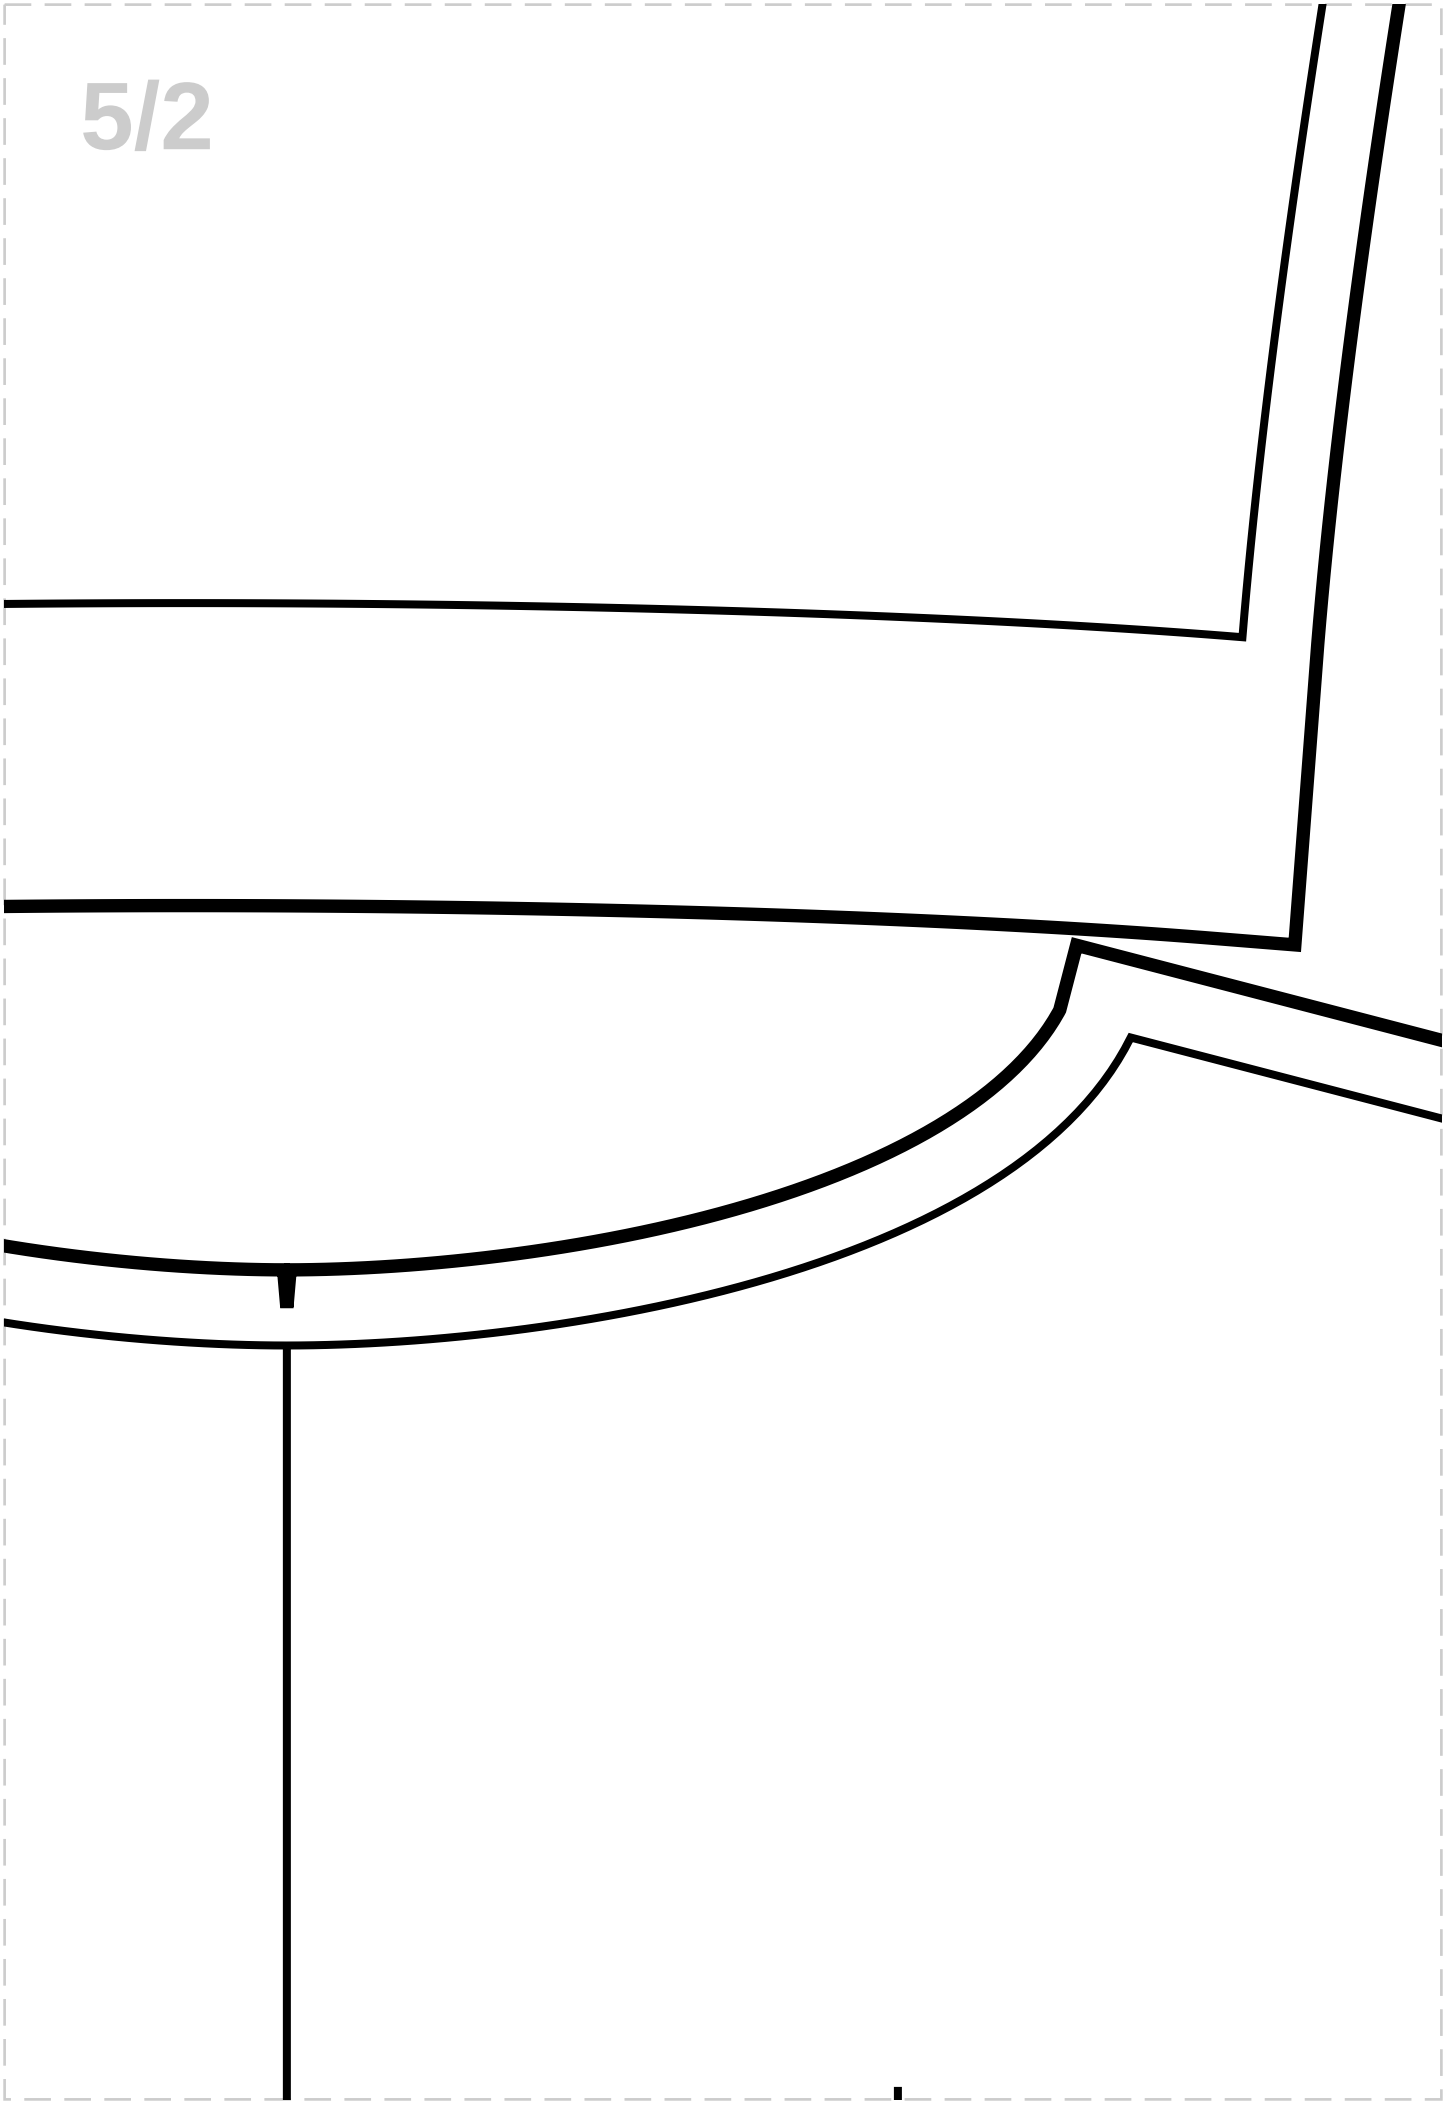

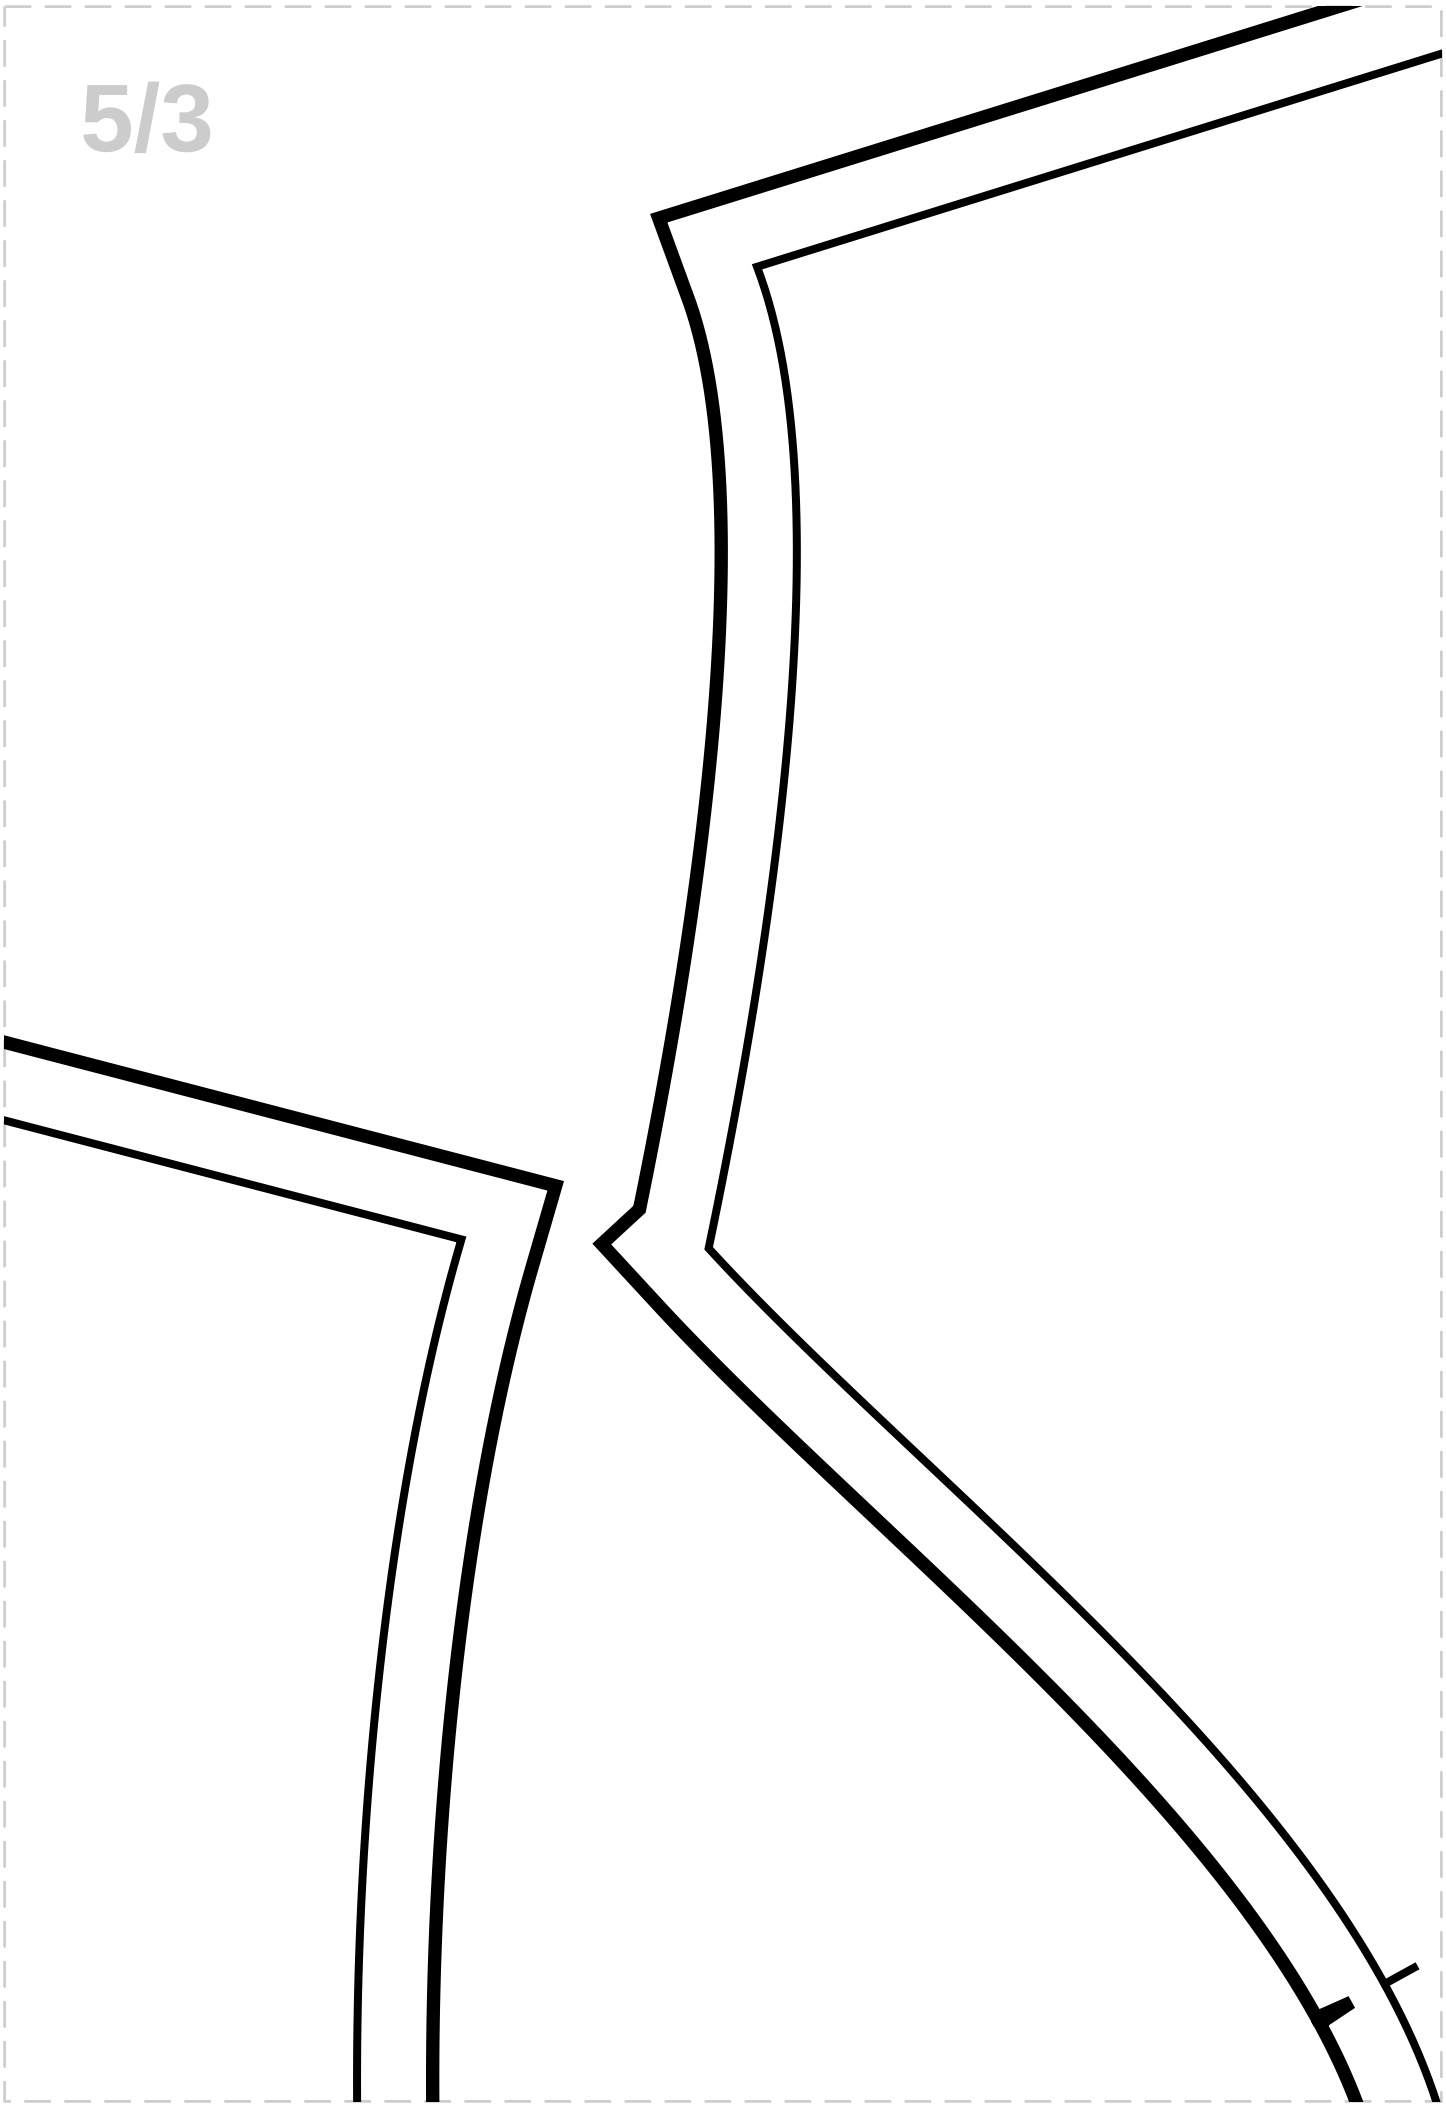

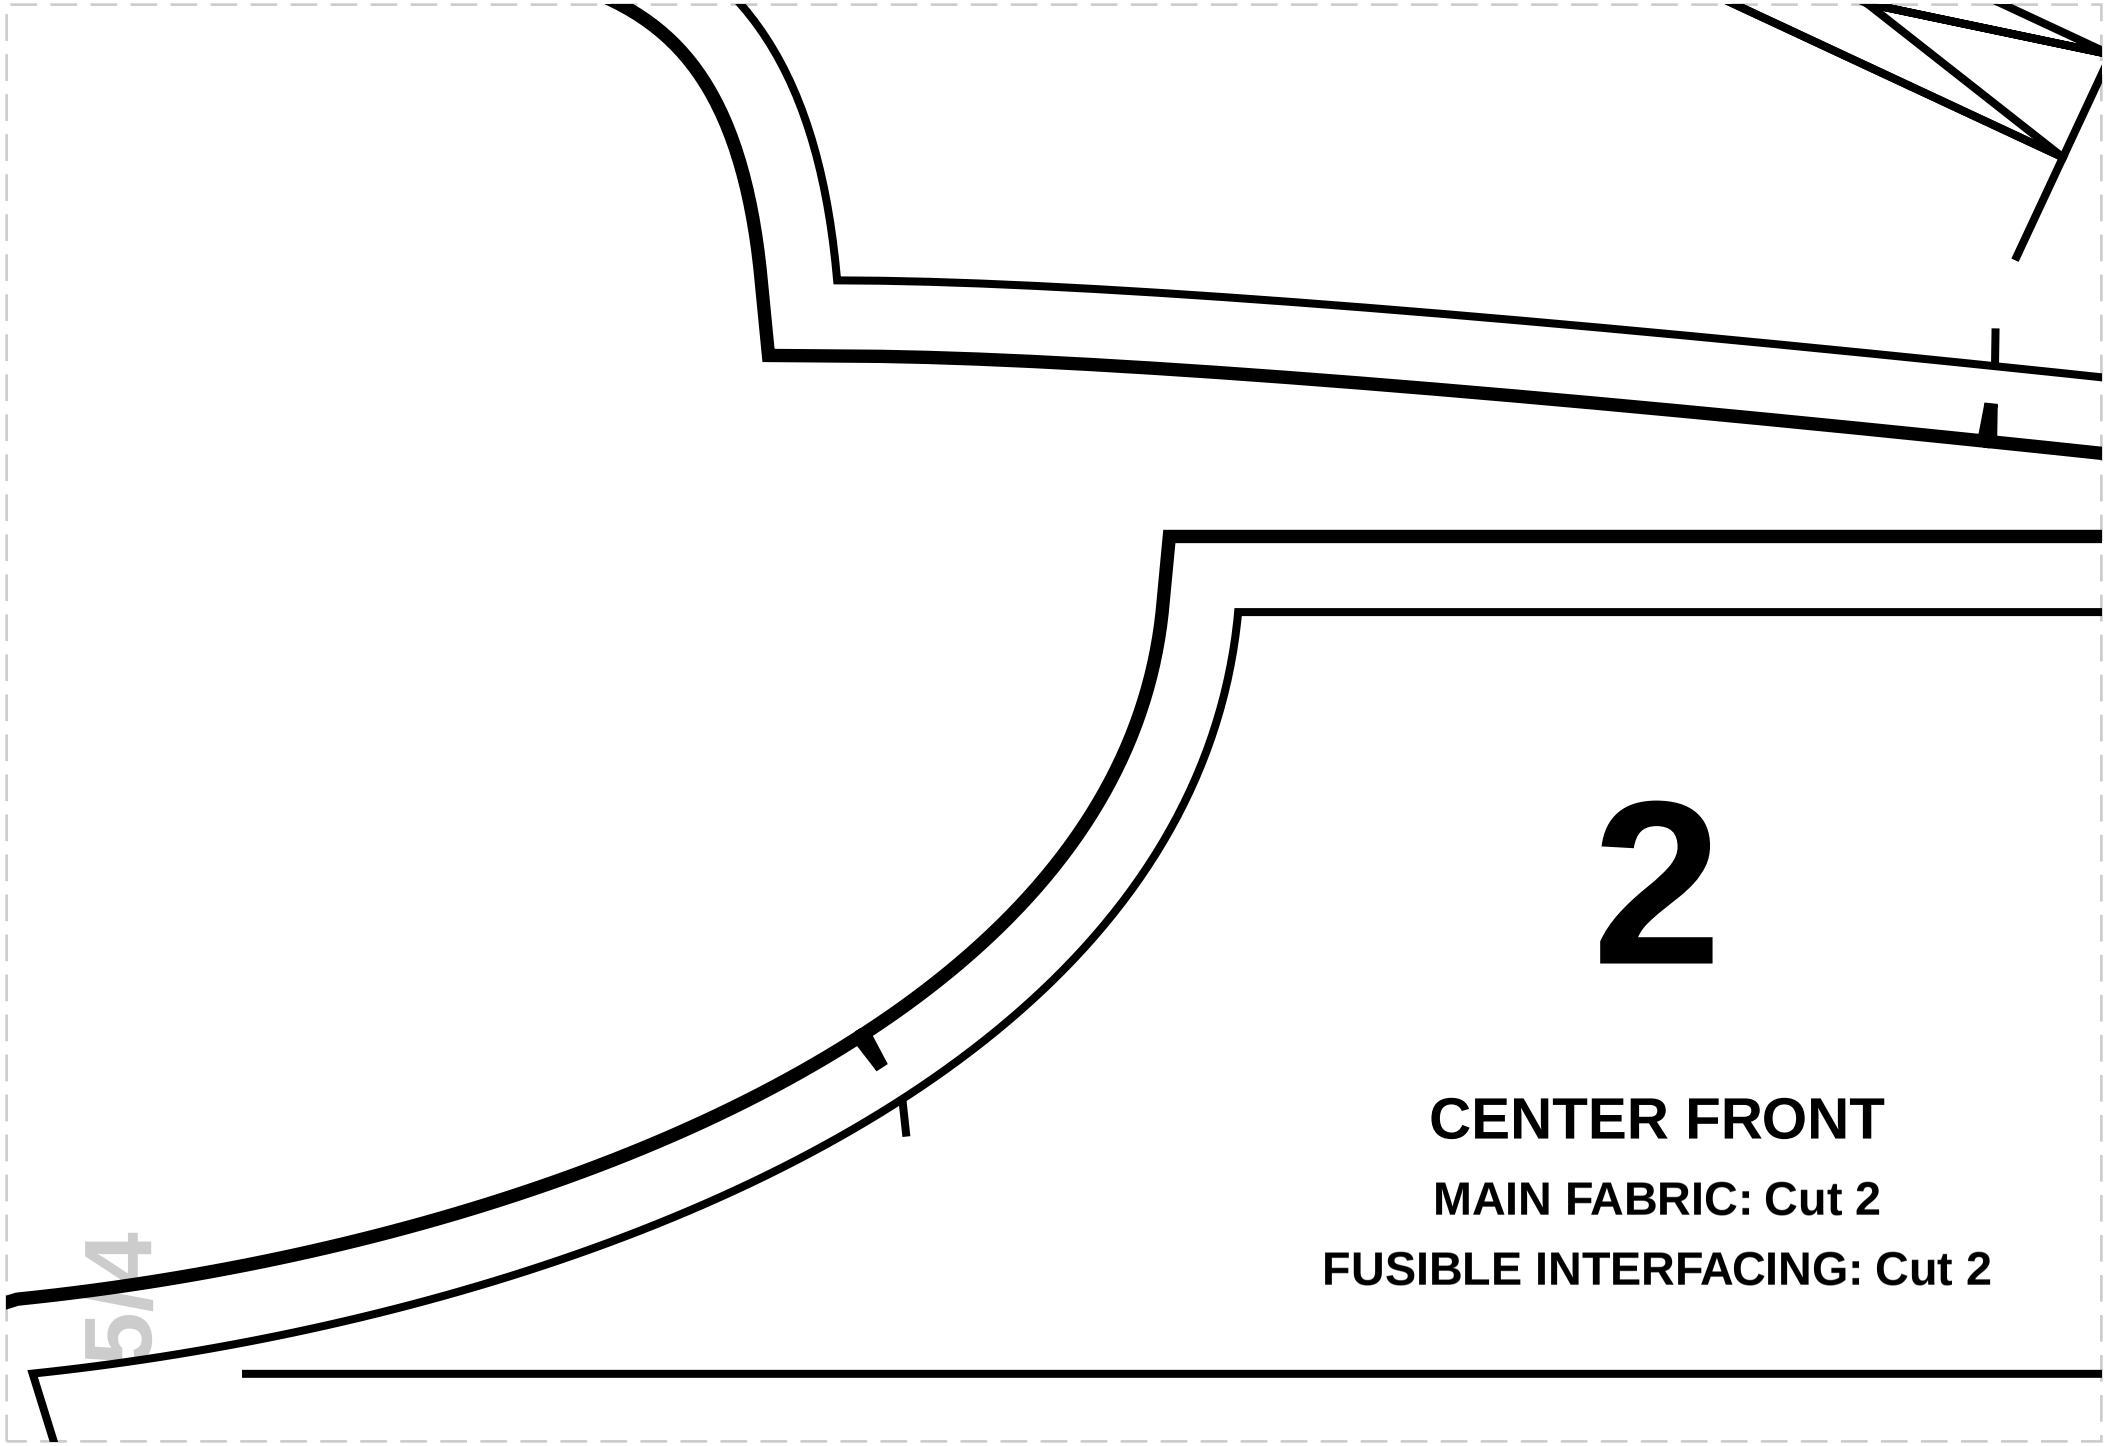
2
CENTER FRONT
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2
5/4

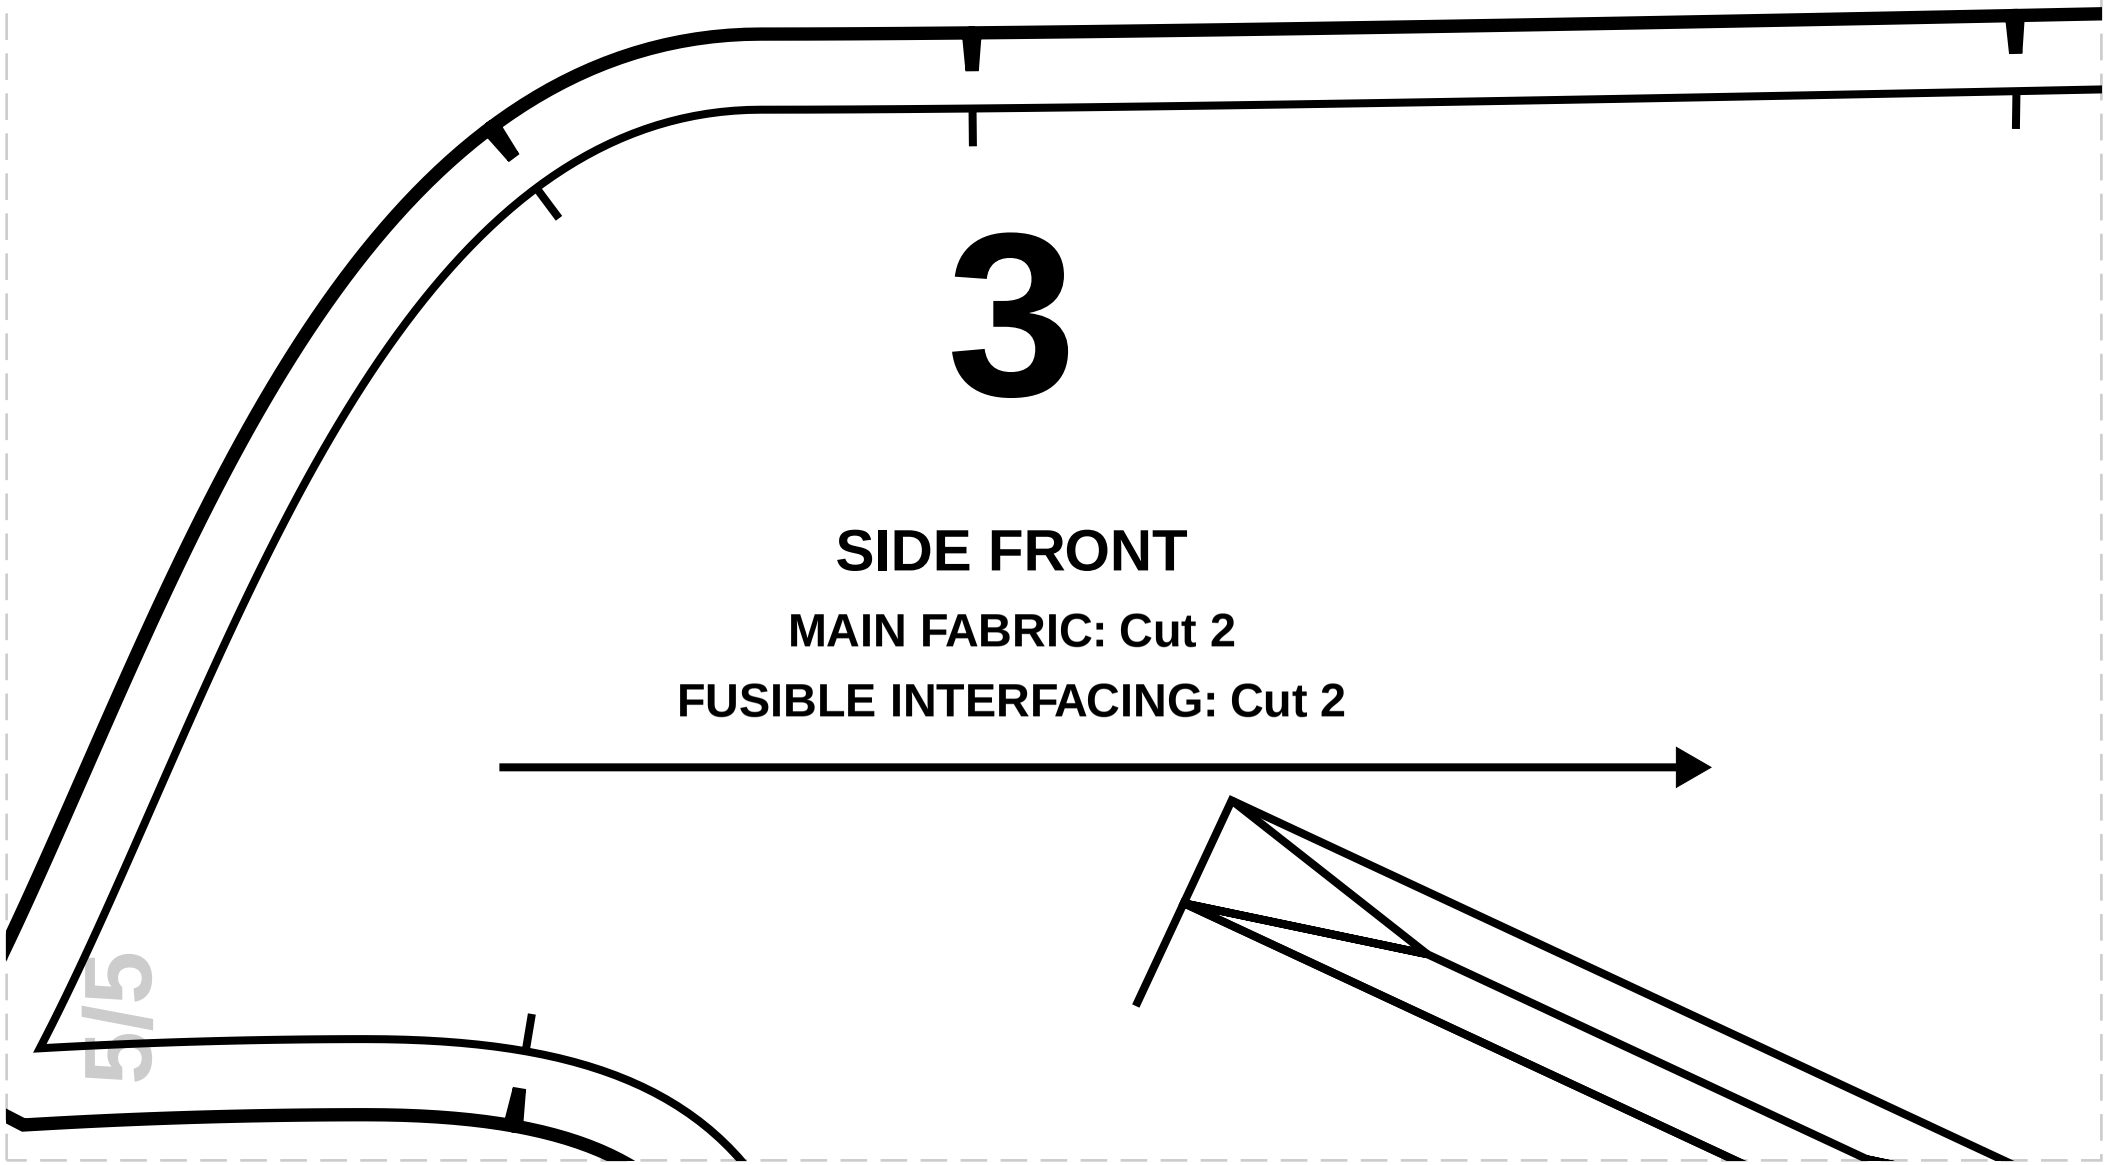

3

SIDE FRONT

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

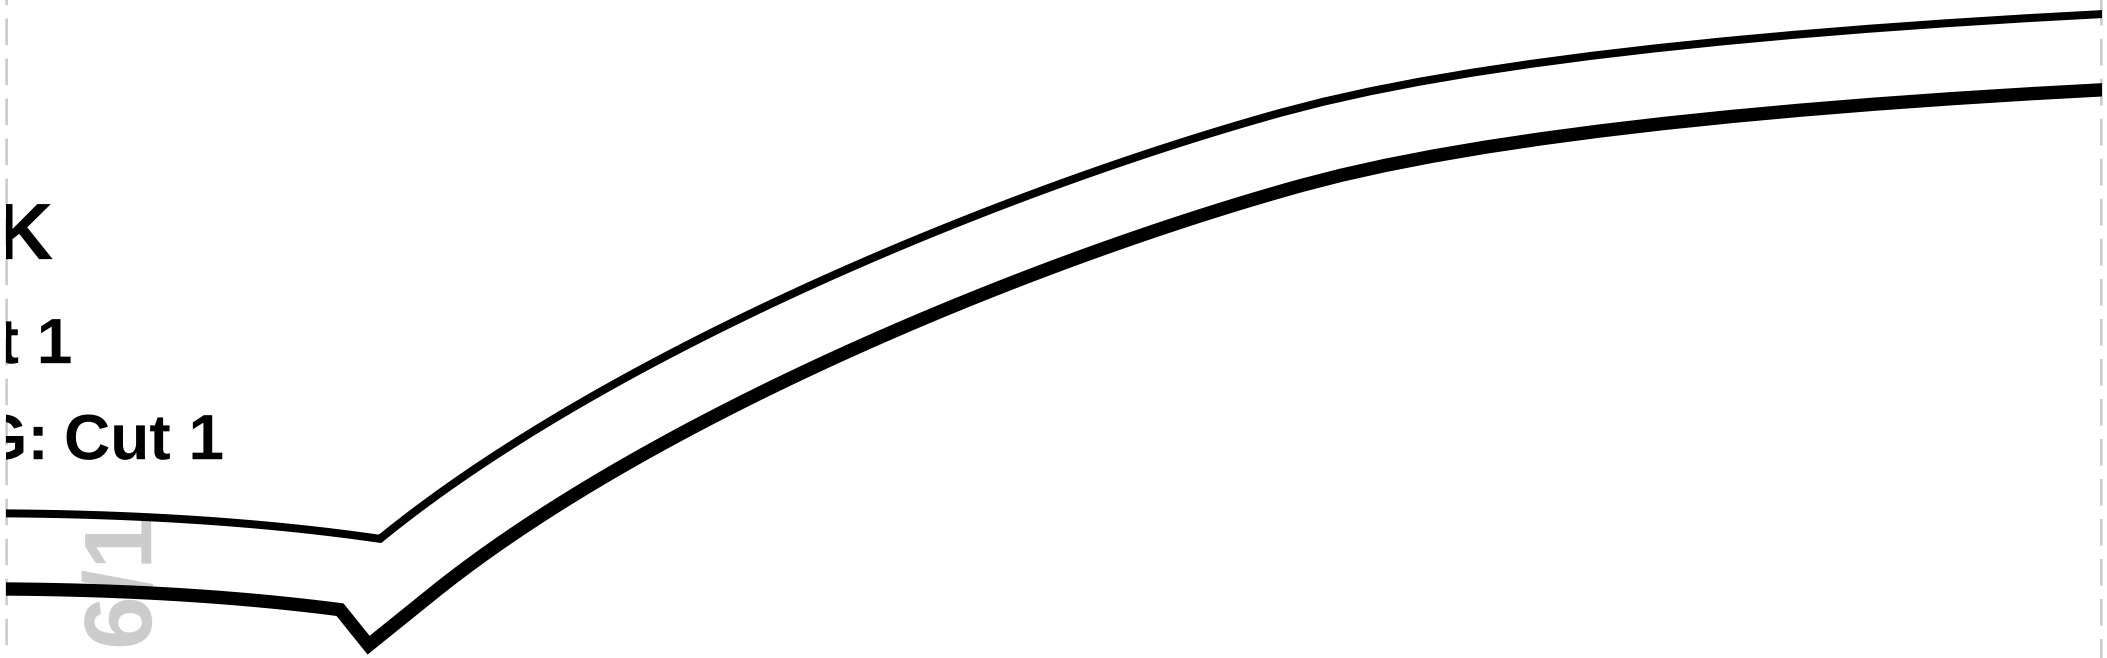
K
t 1
G: Cut 1

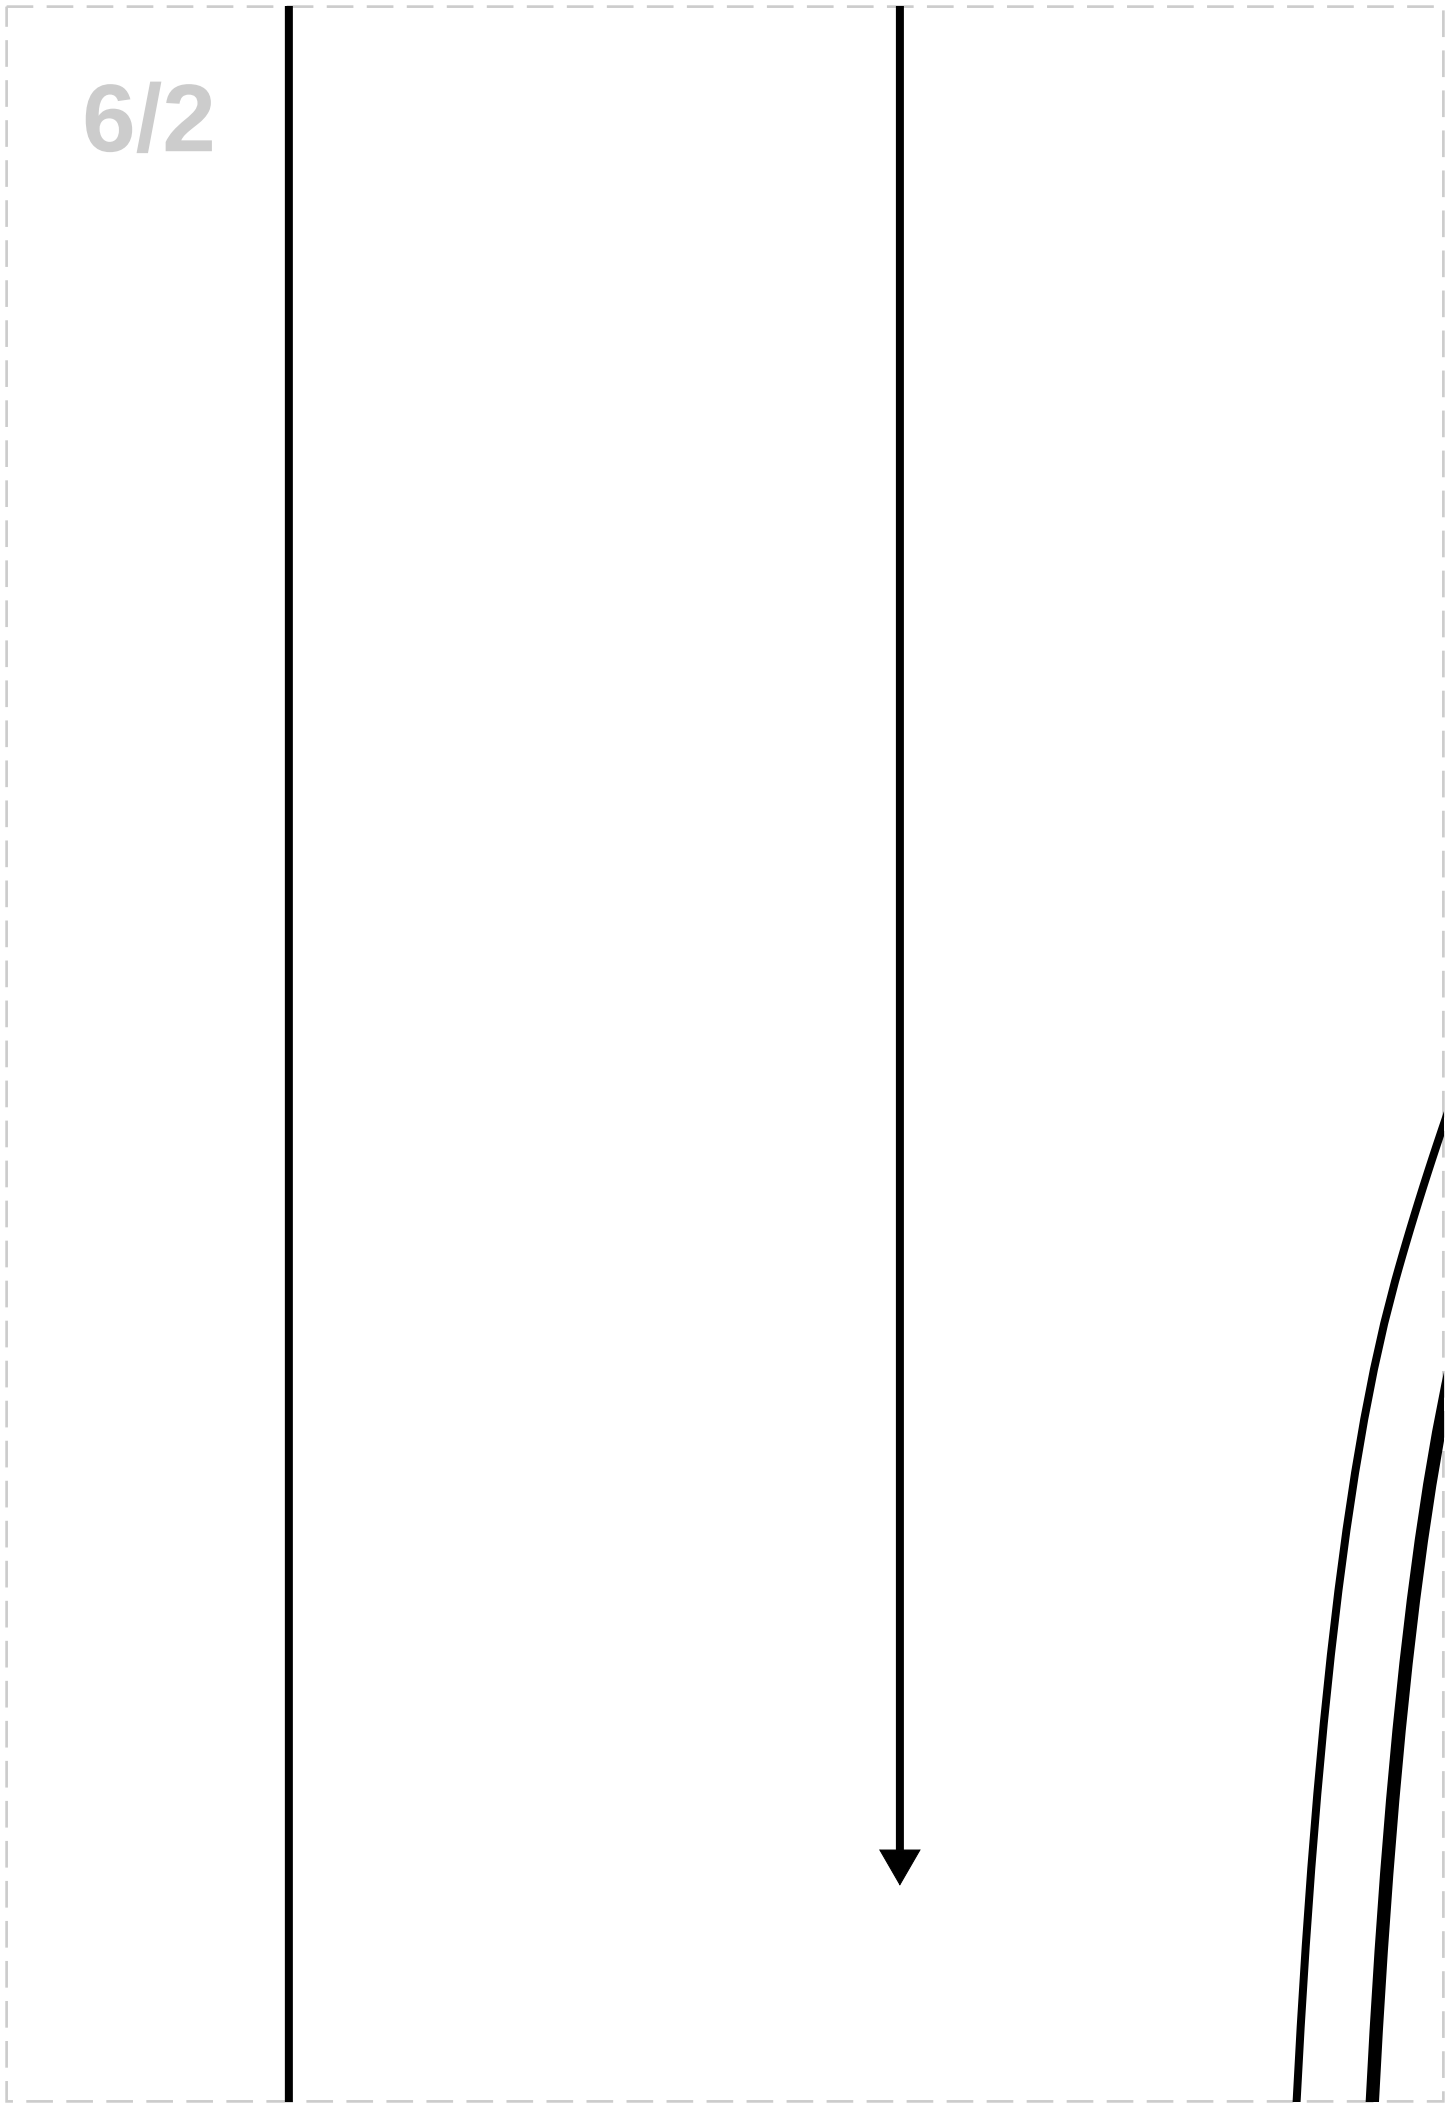

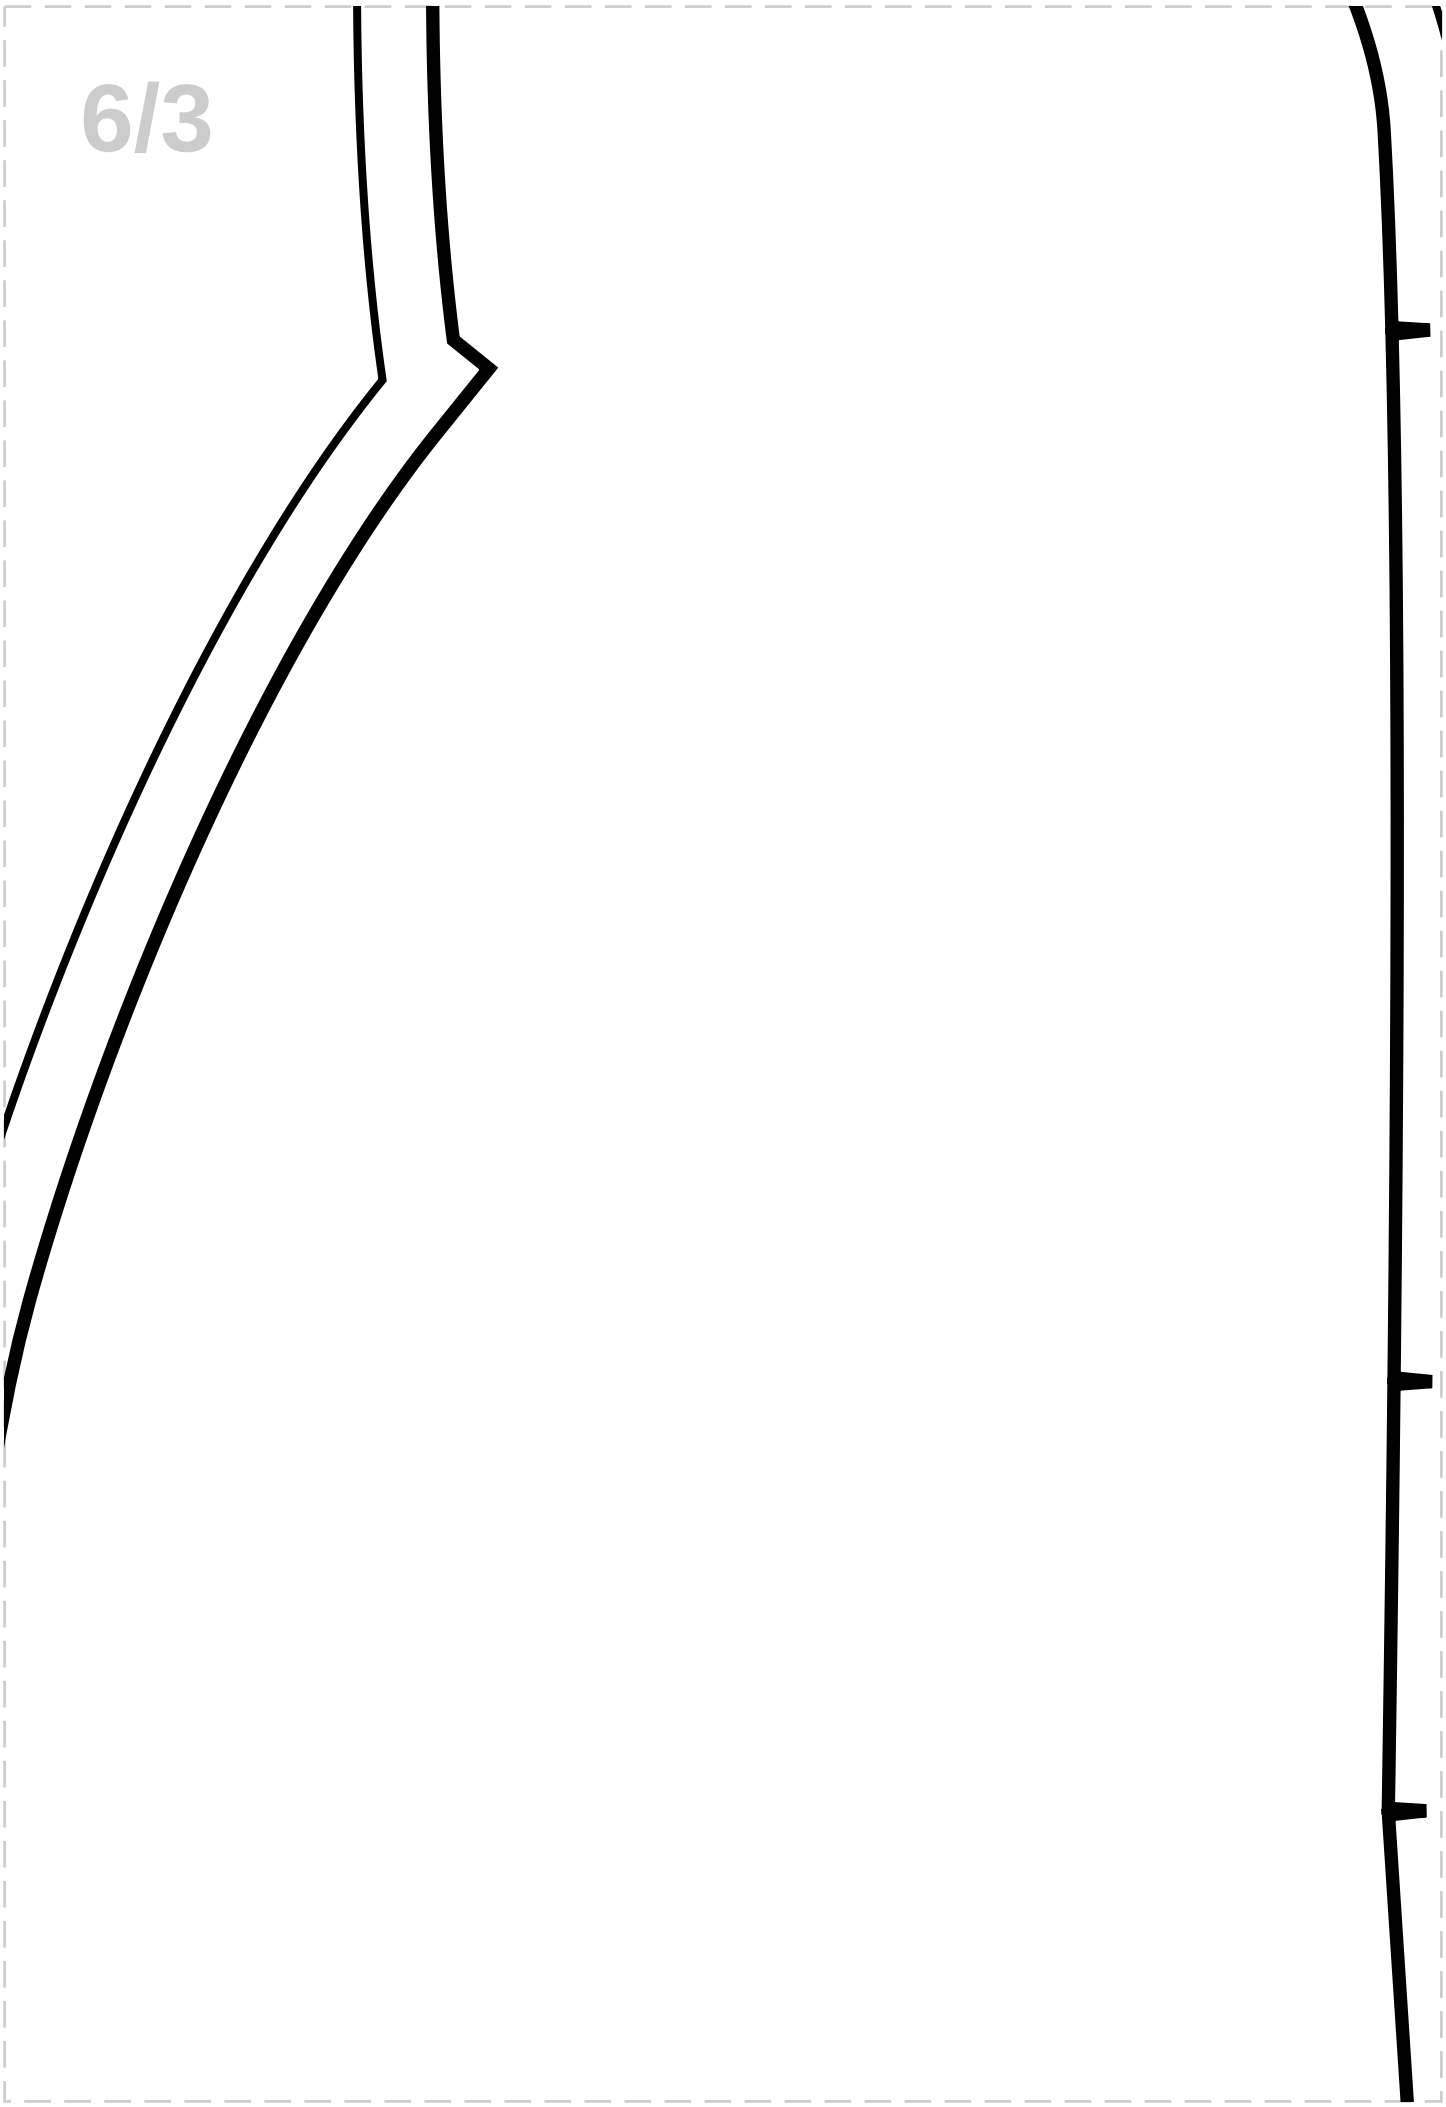

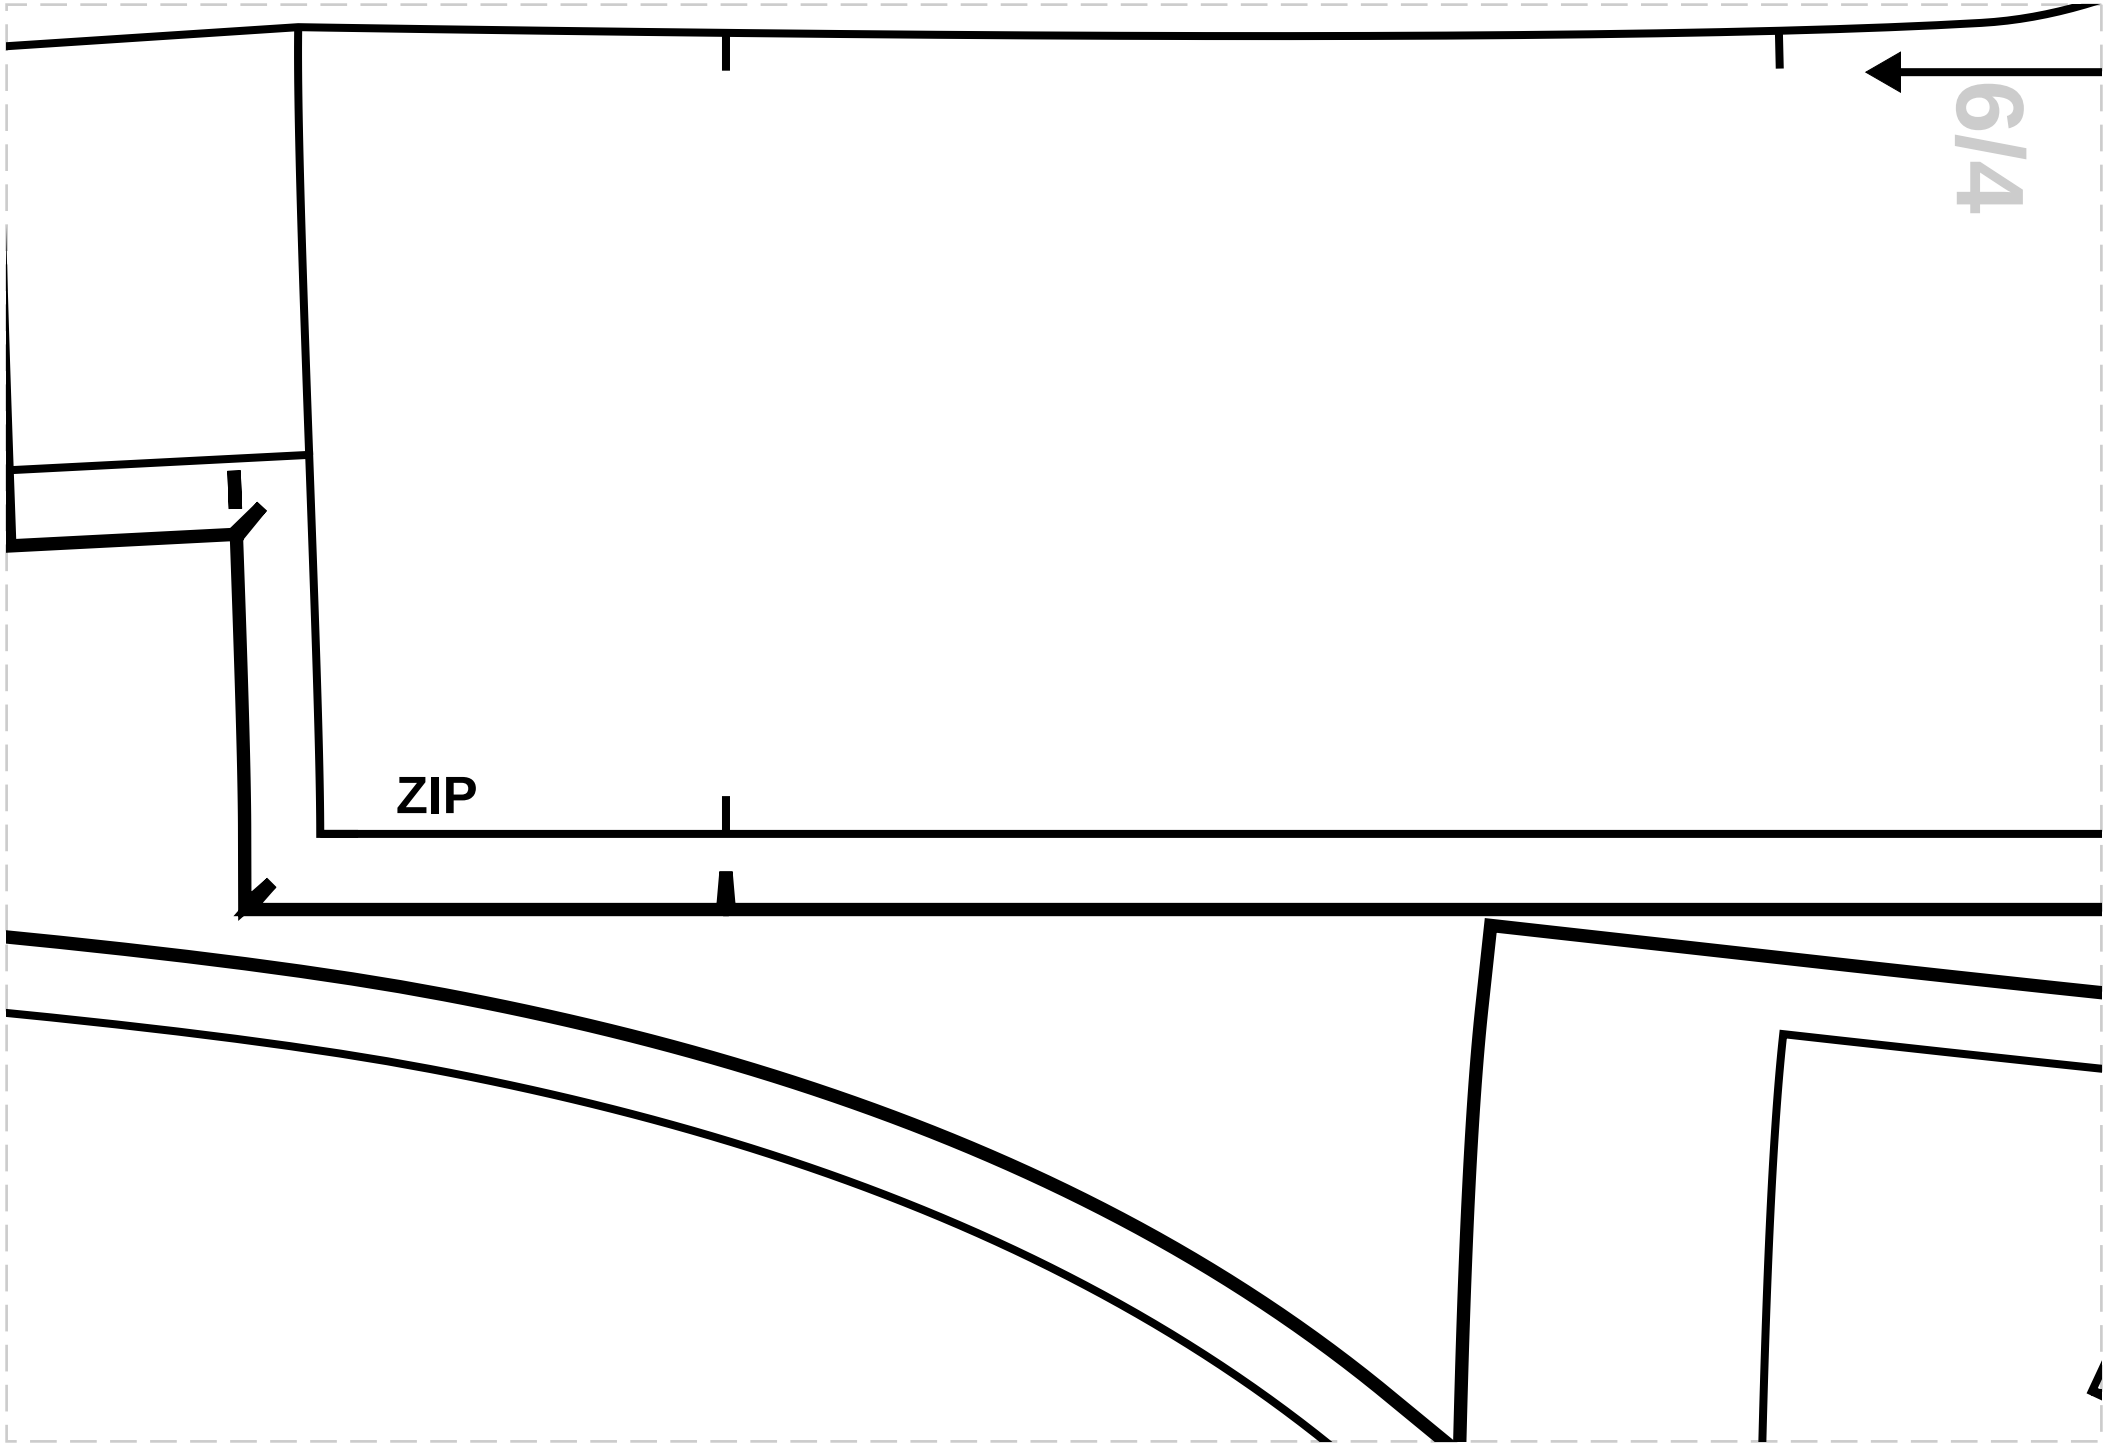
6/4
ZIP

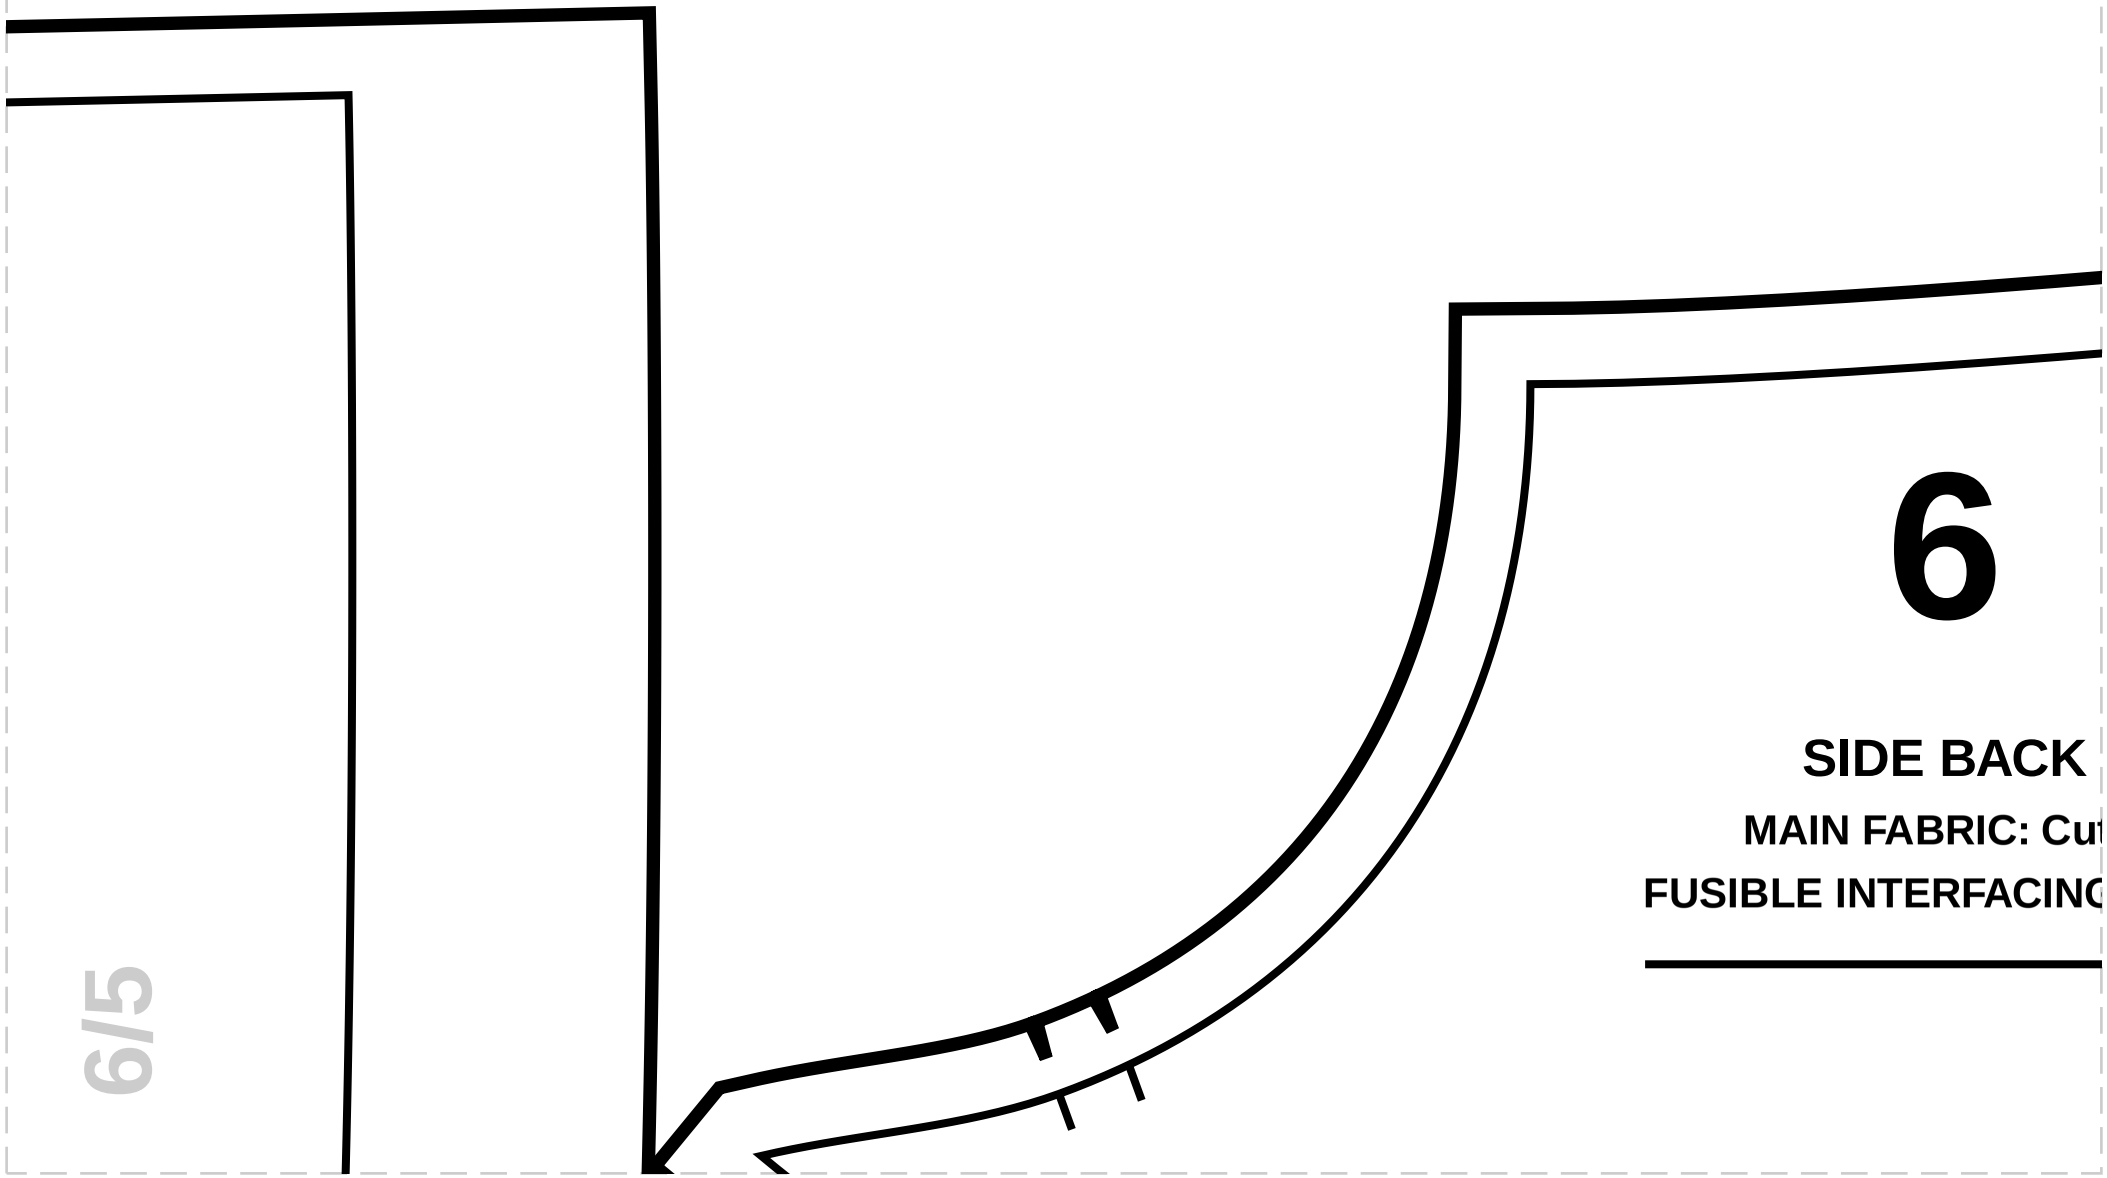

6

SIDE BACK

MAIN FABRIC: Cut

FUSIBLE INTERFACING

6/5

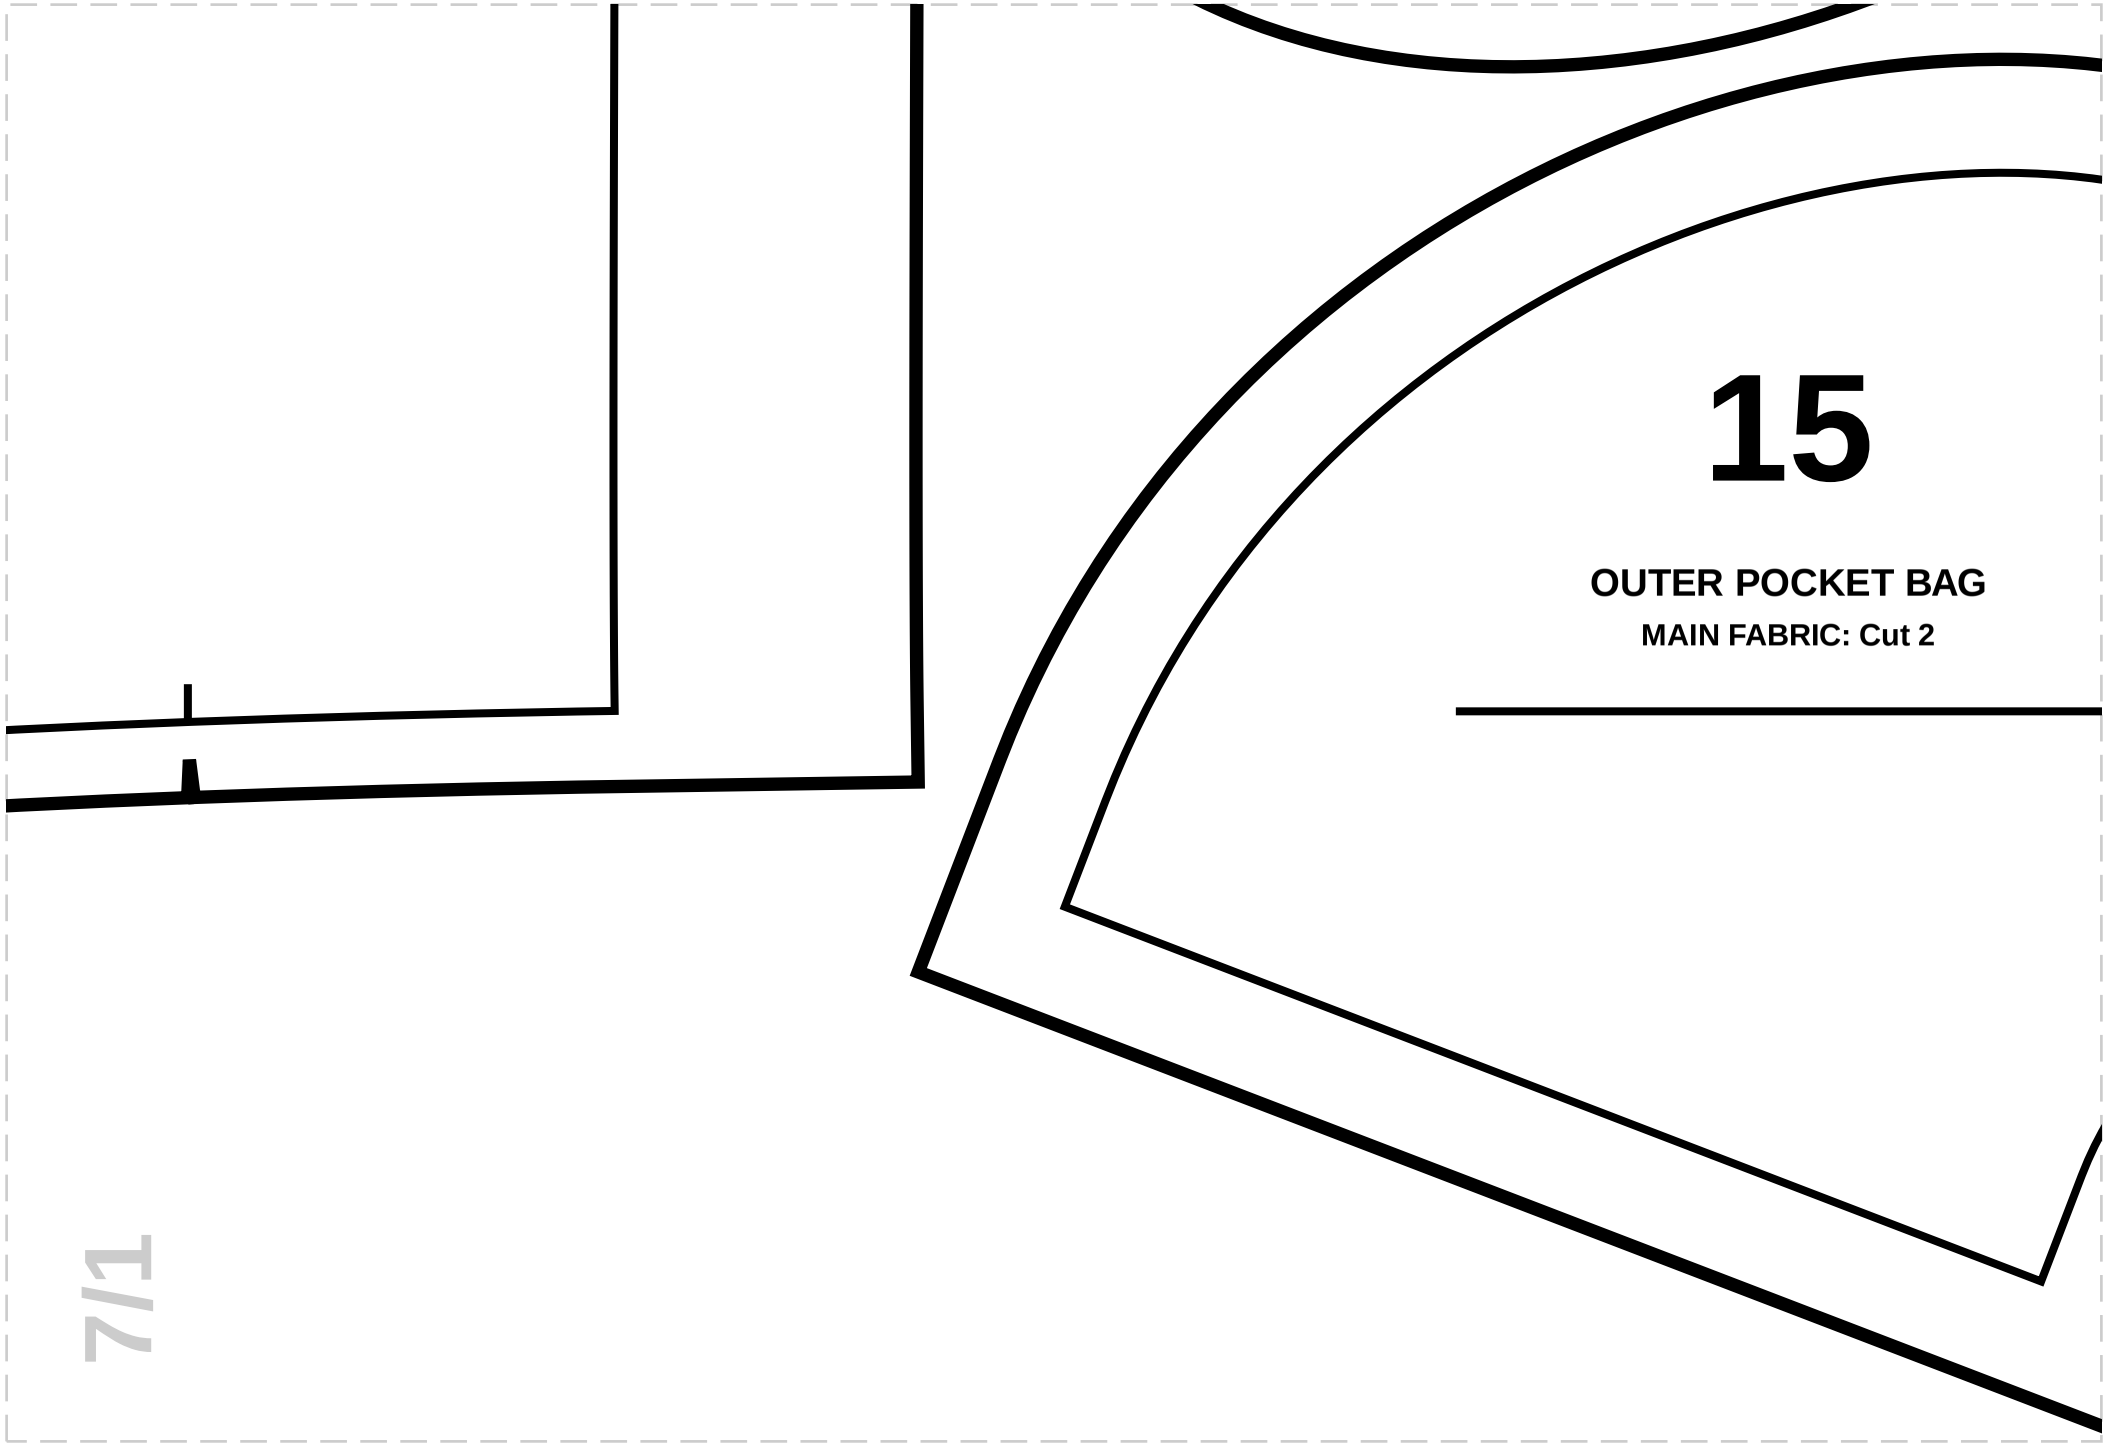
15
OUTER POCKET BAG
MAIN FABRIC: Cut 2

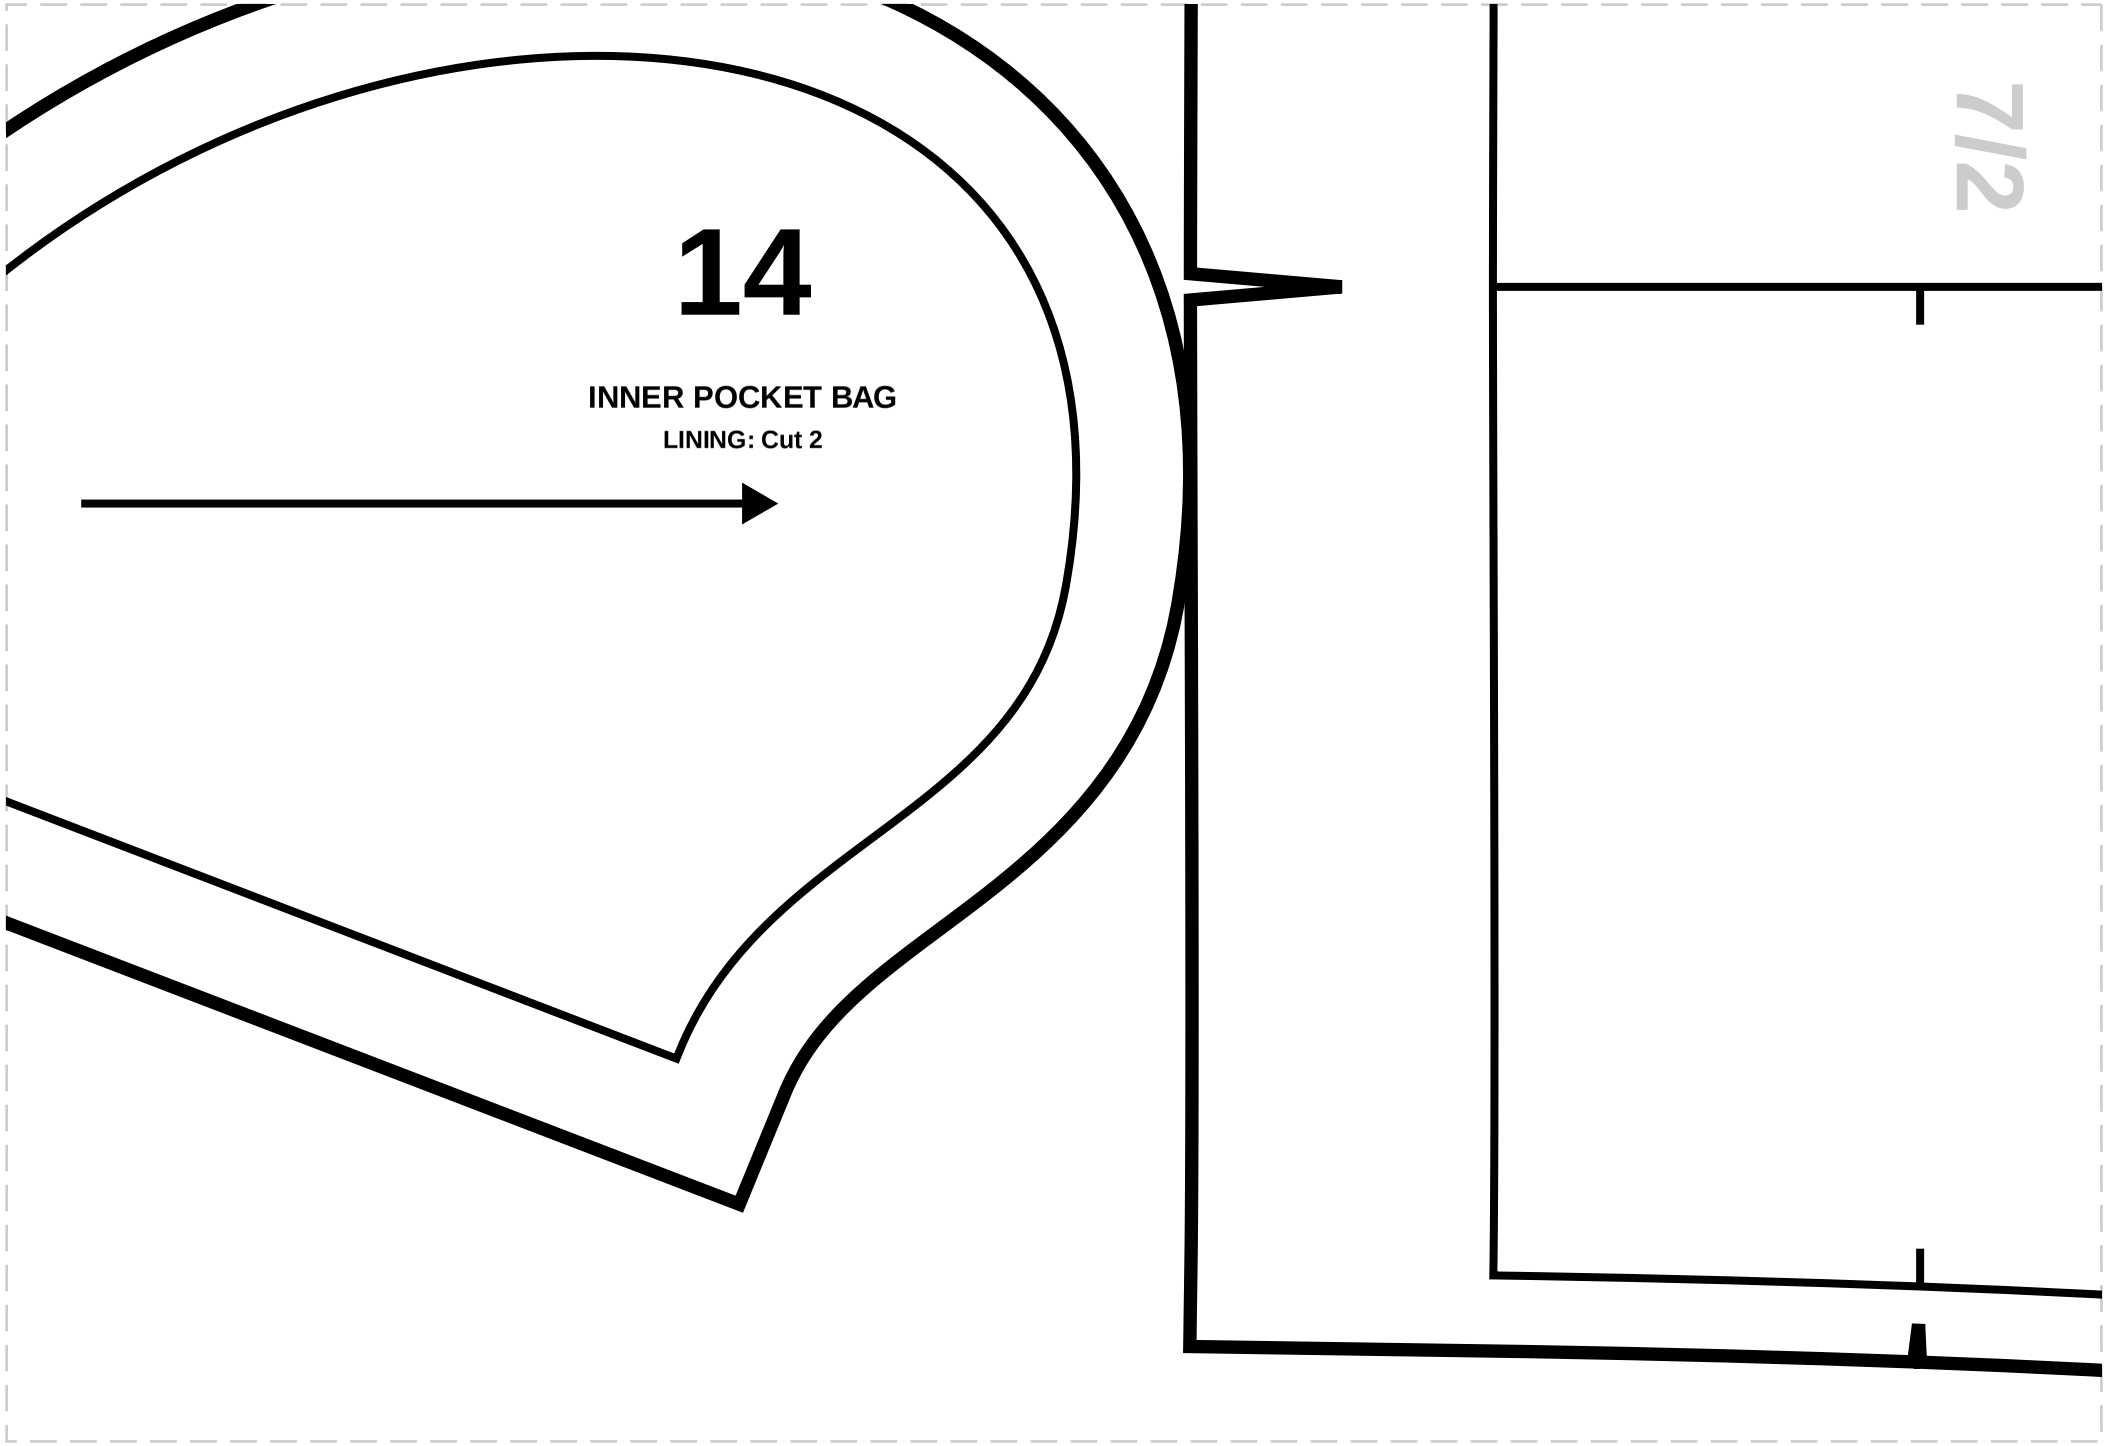
14
INNER POCKET BAG
LINING: Cut 2
7/2

7/3

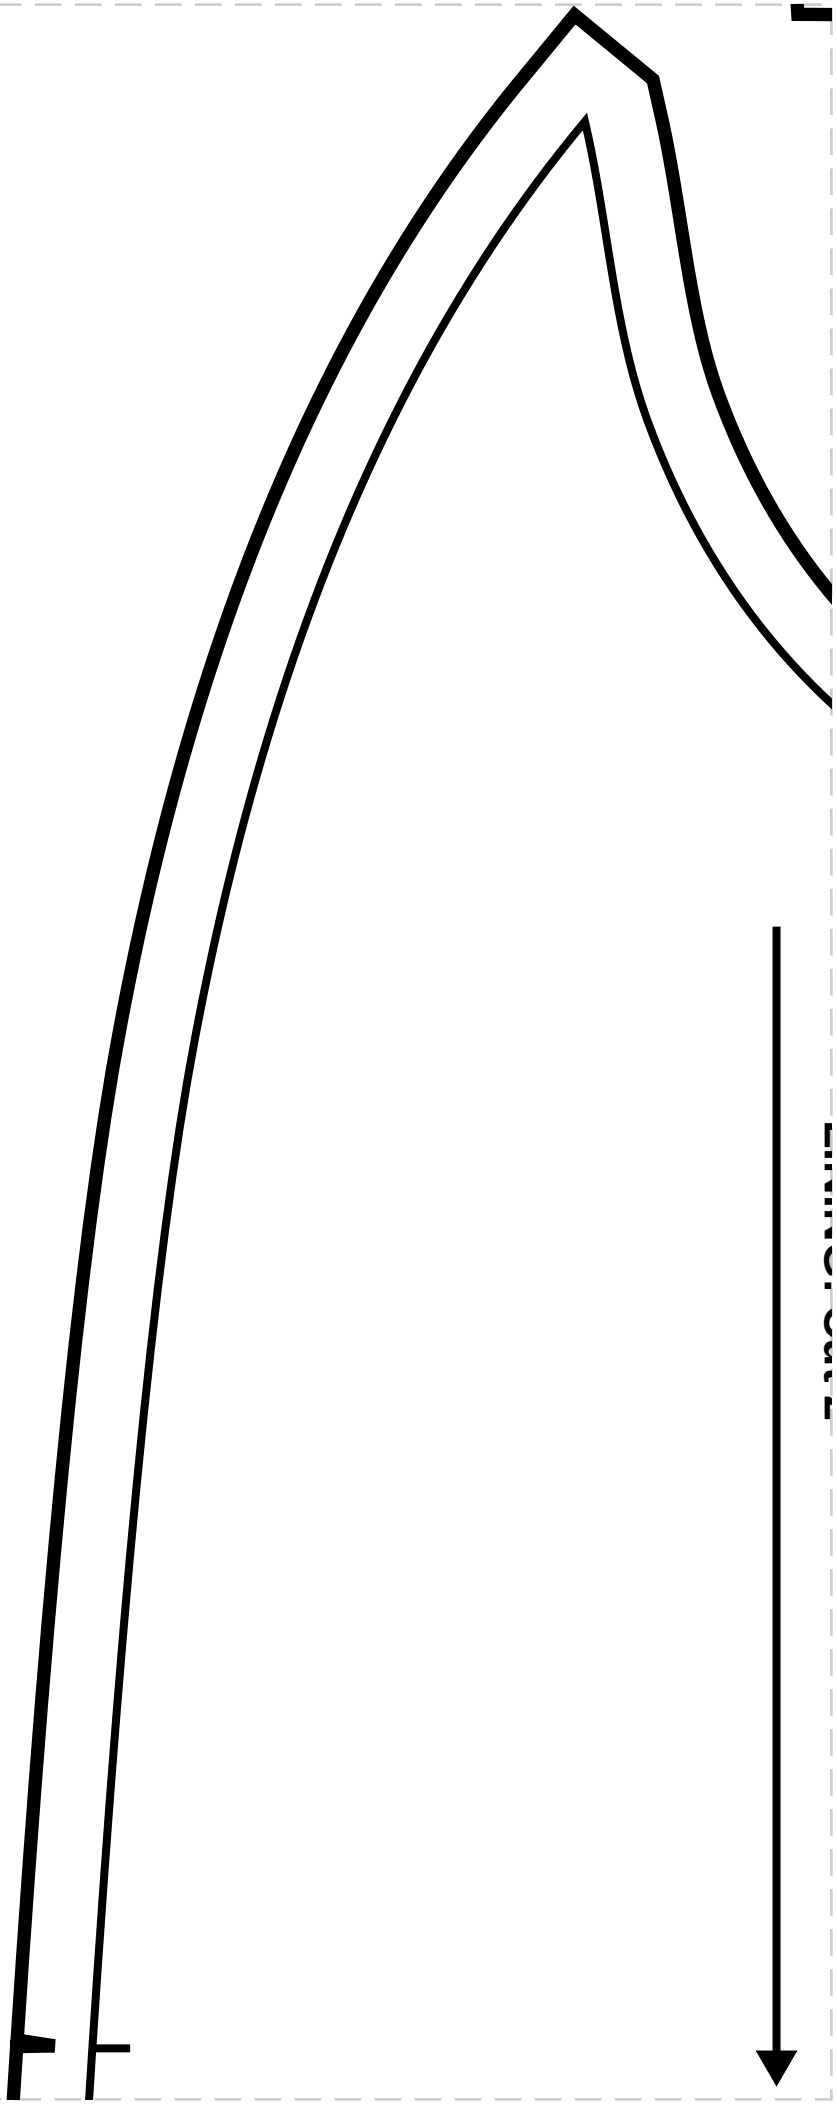

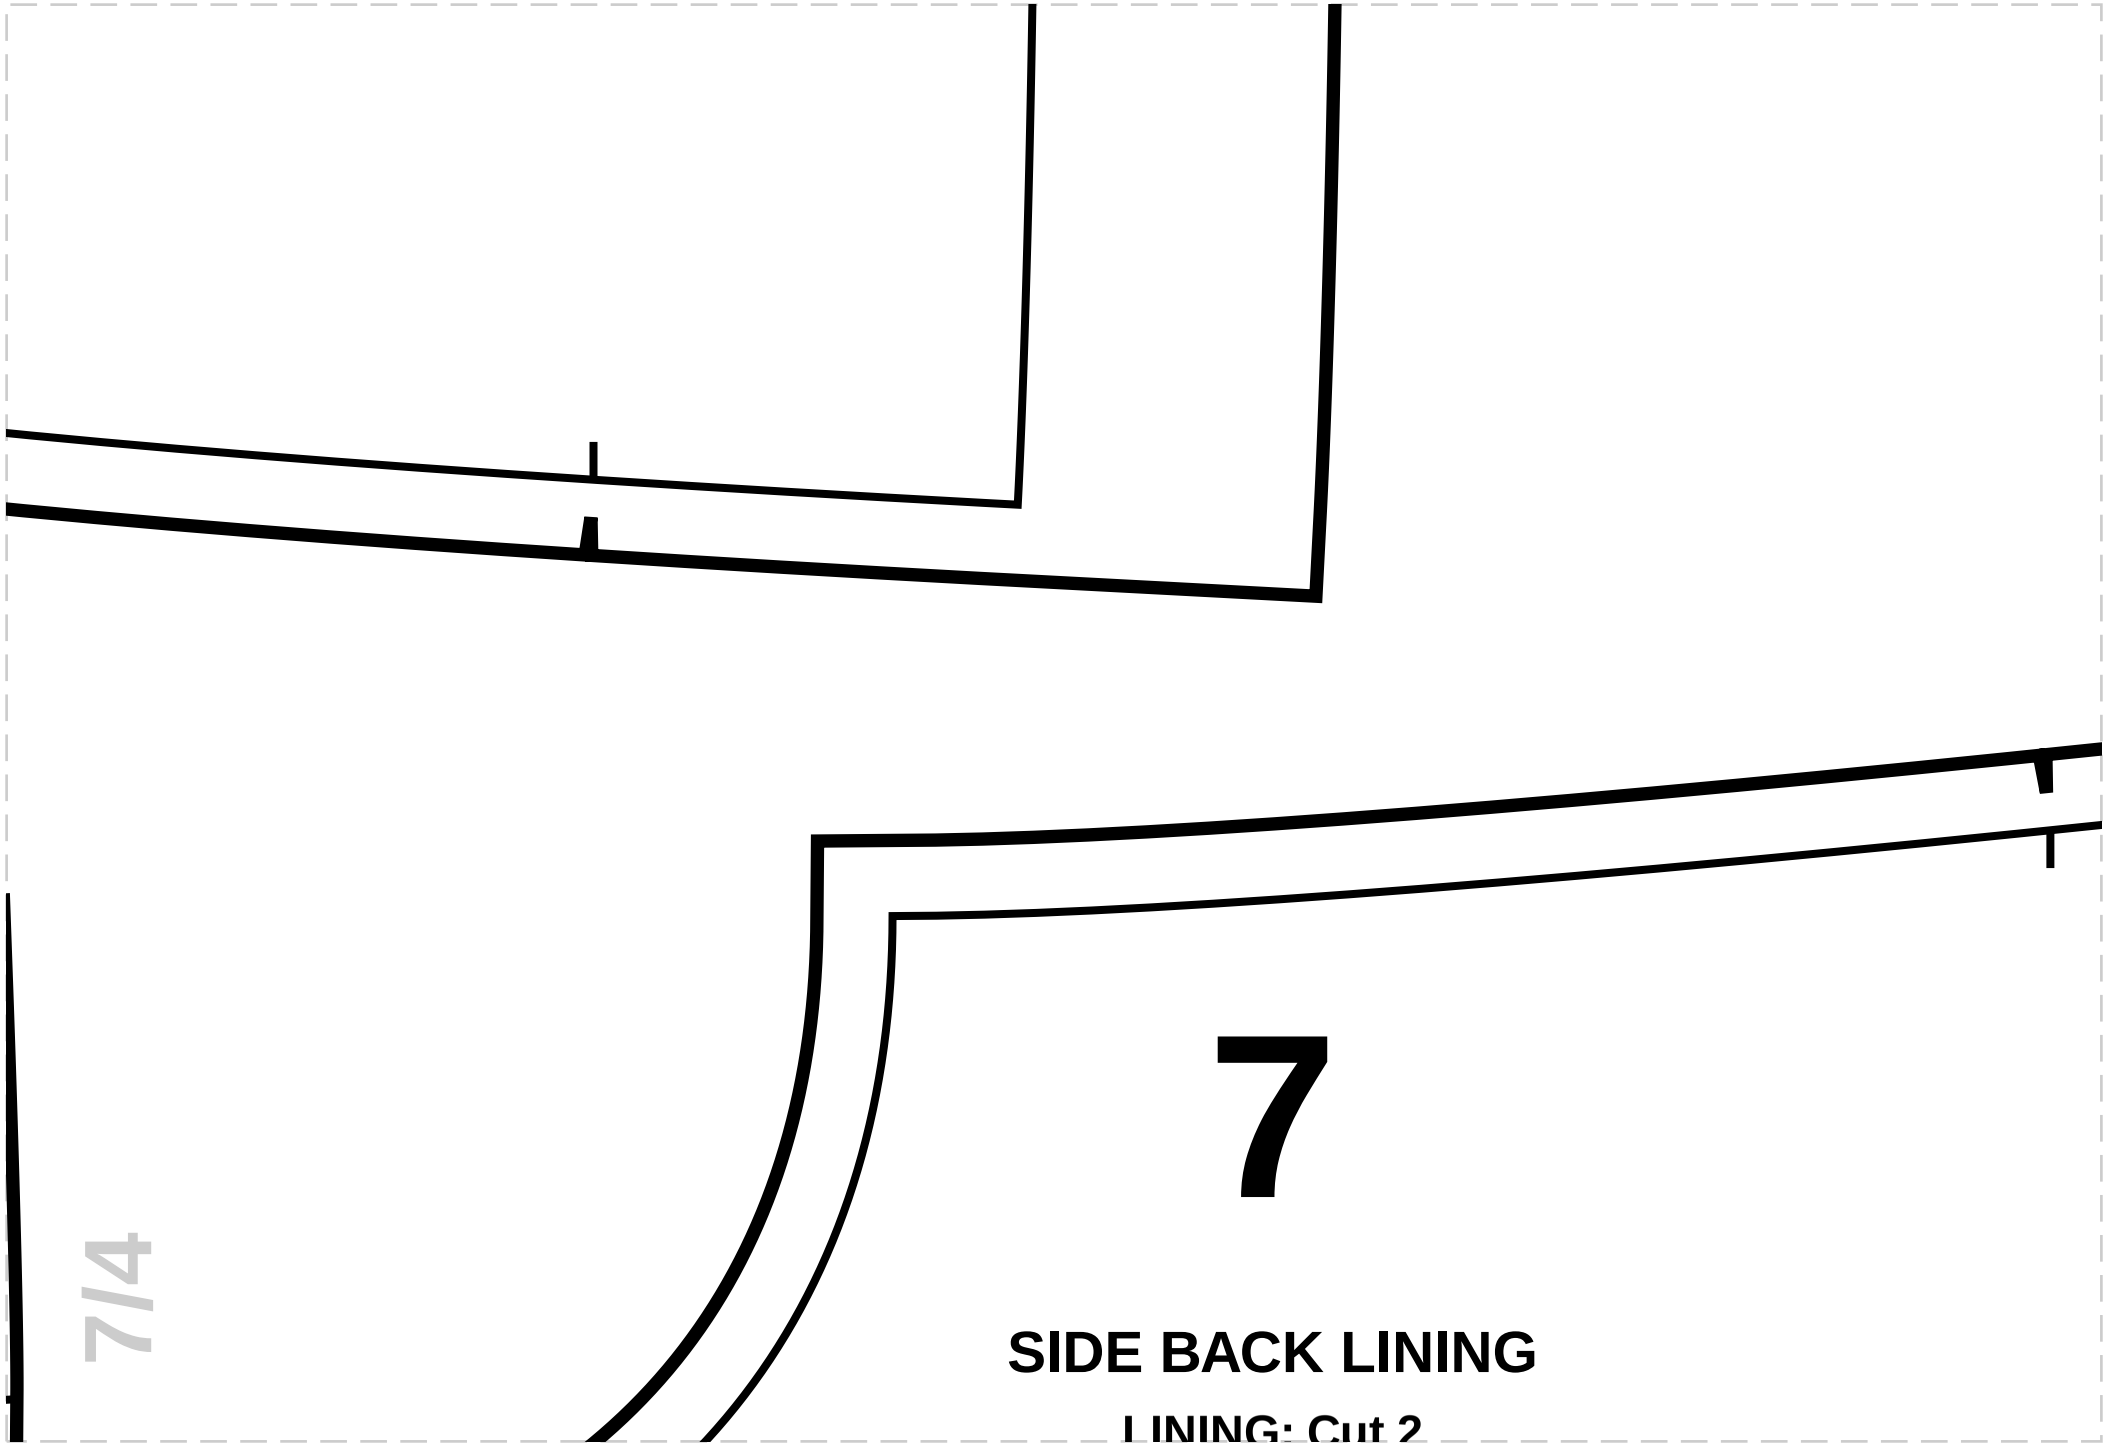

7

SIDE BACK LINING

LINING: Cut 2

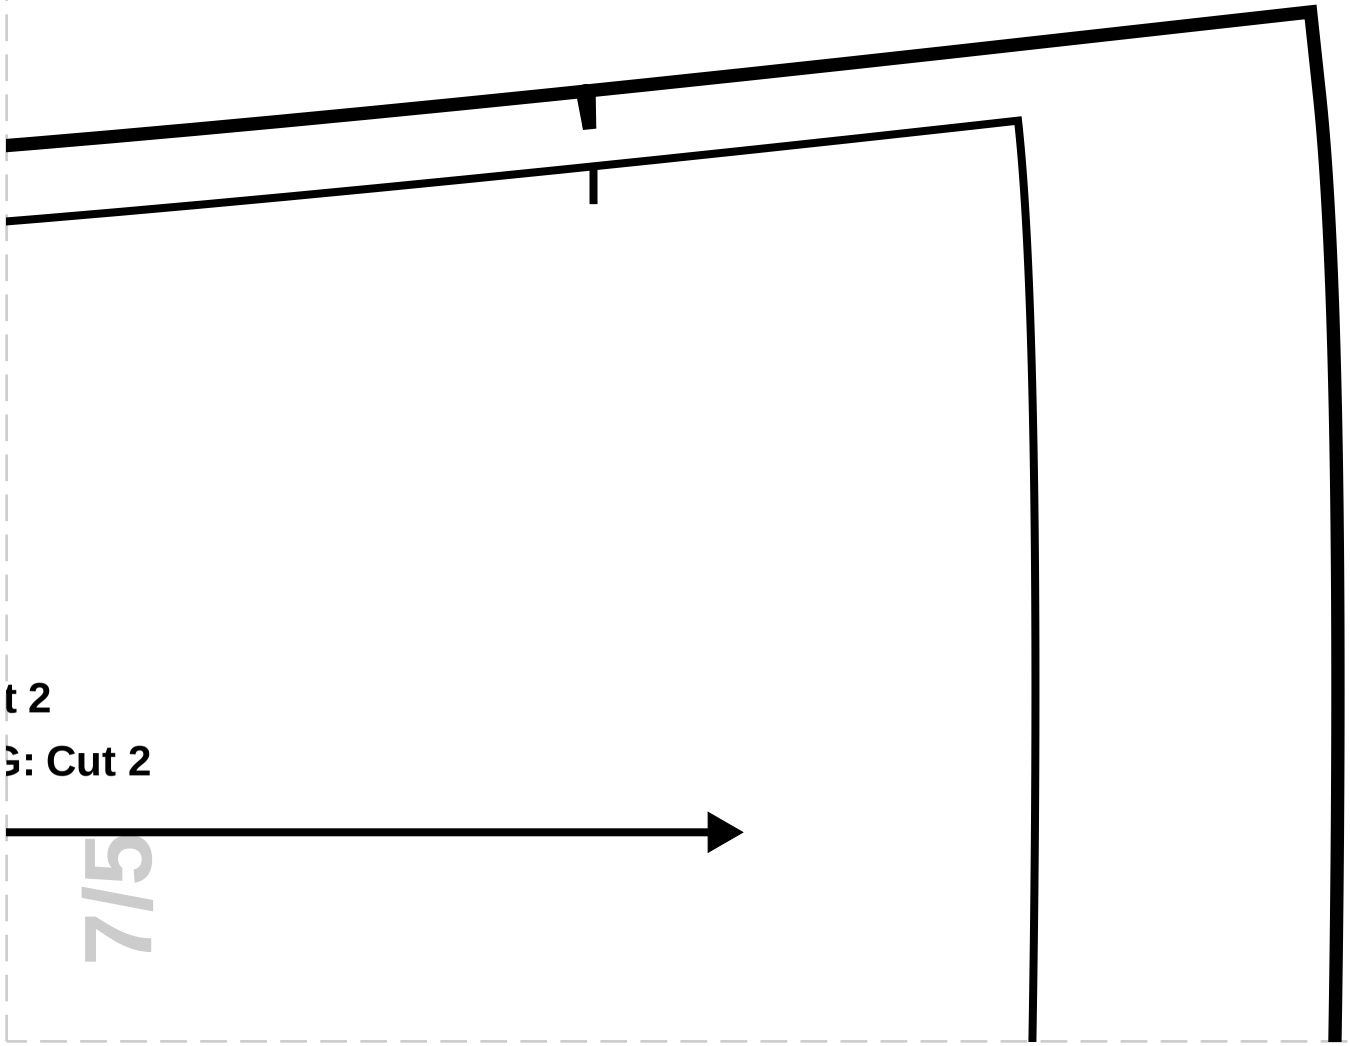
t 2
G: Cut 2

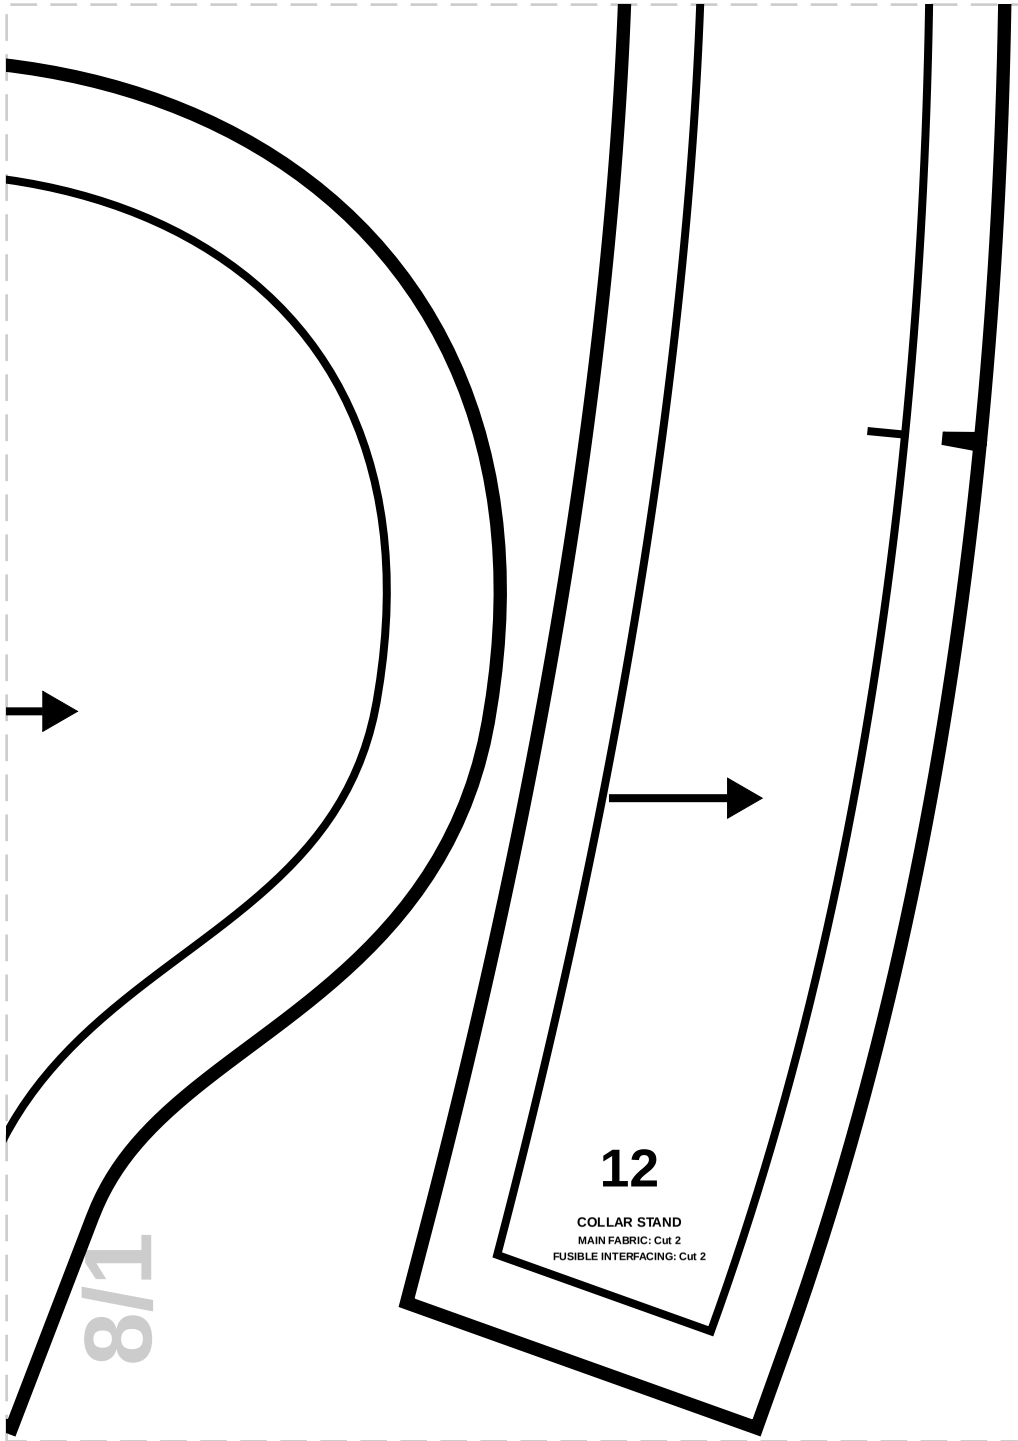

8/1

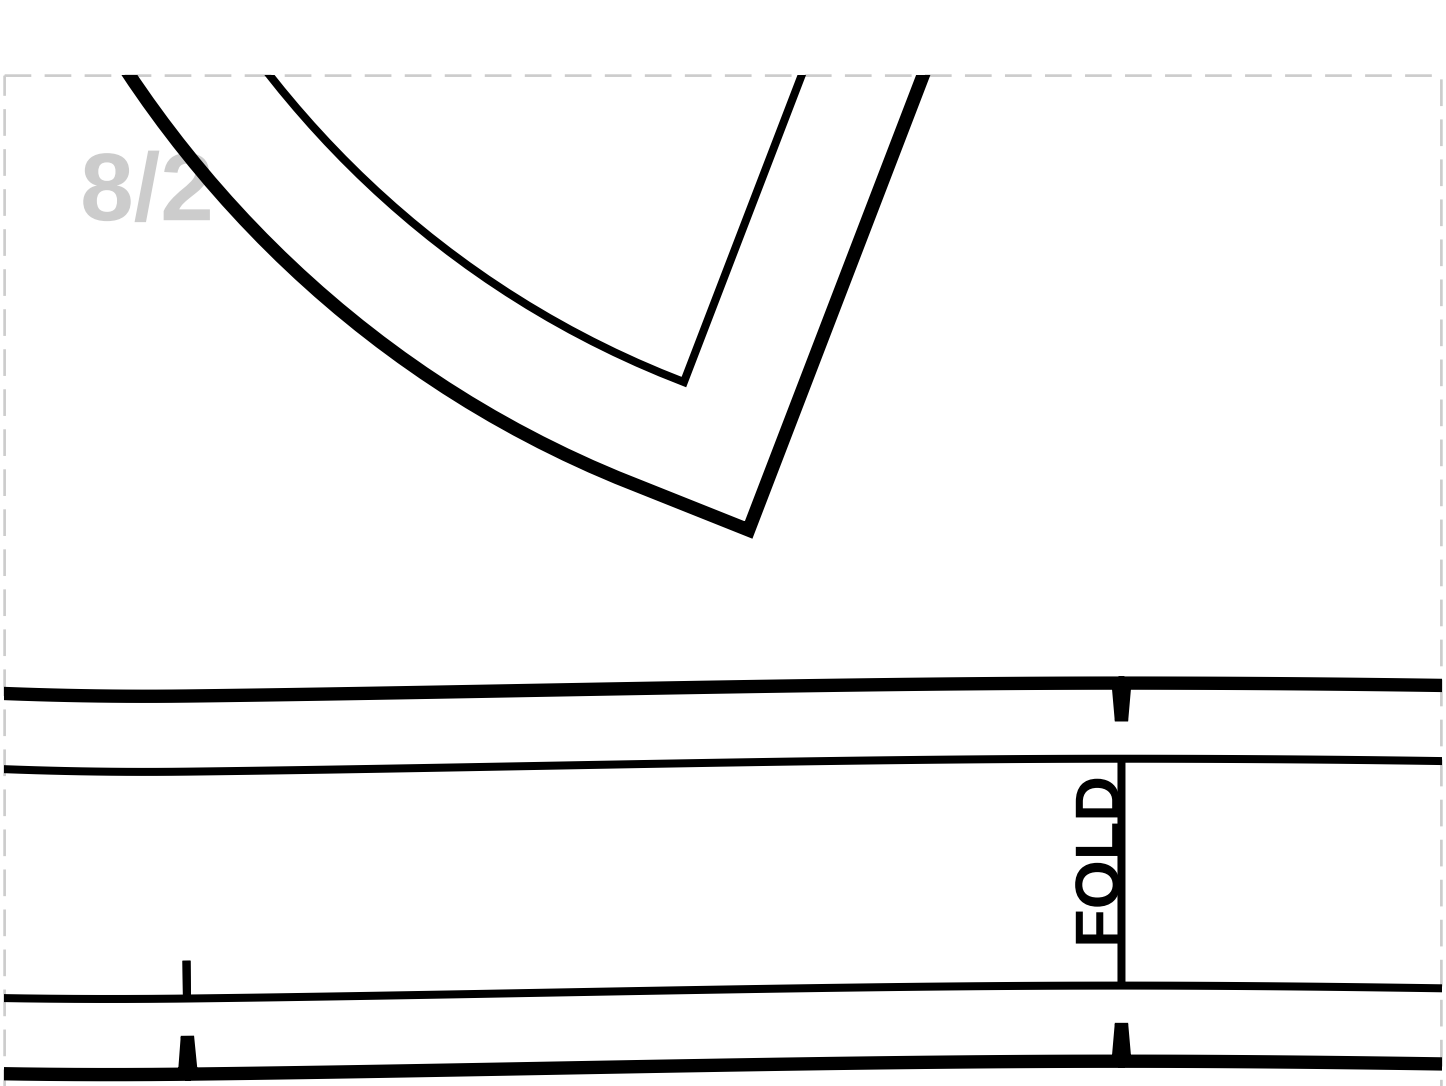
FOLD

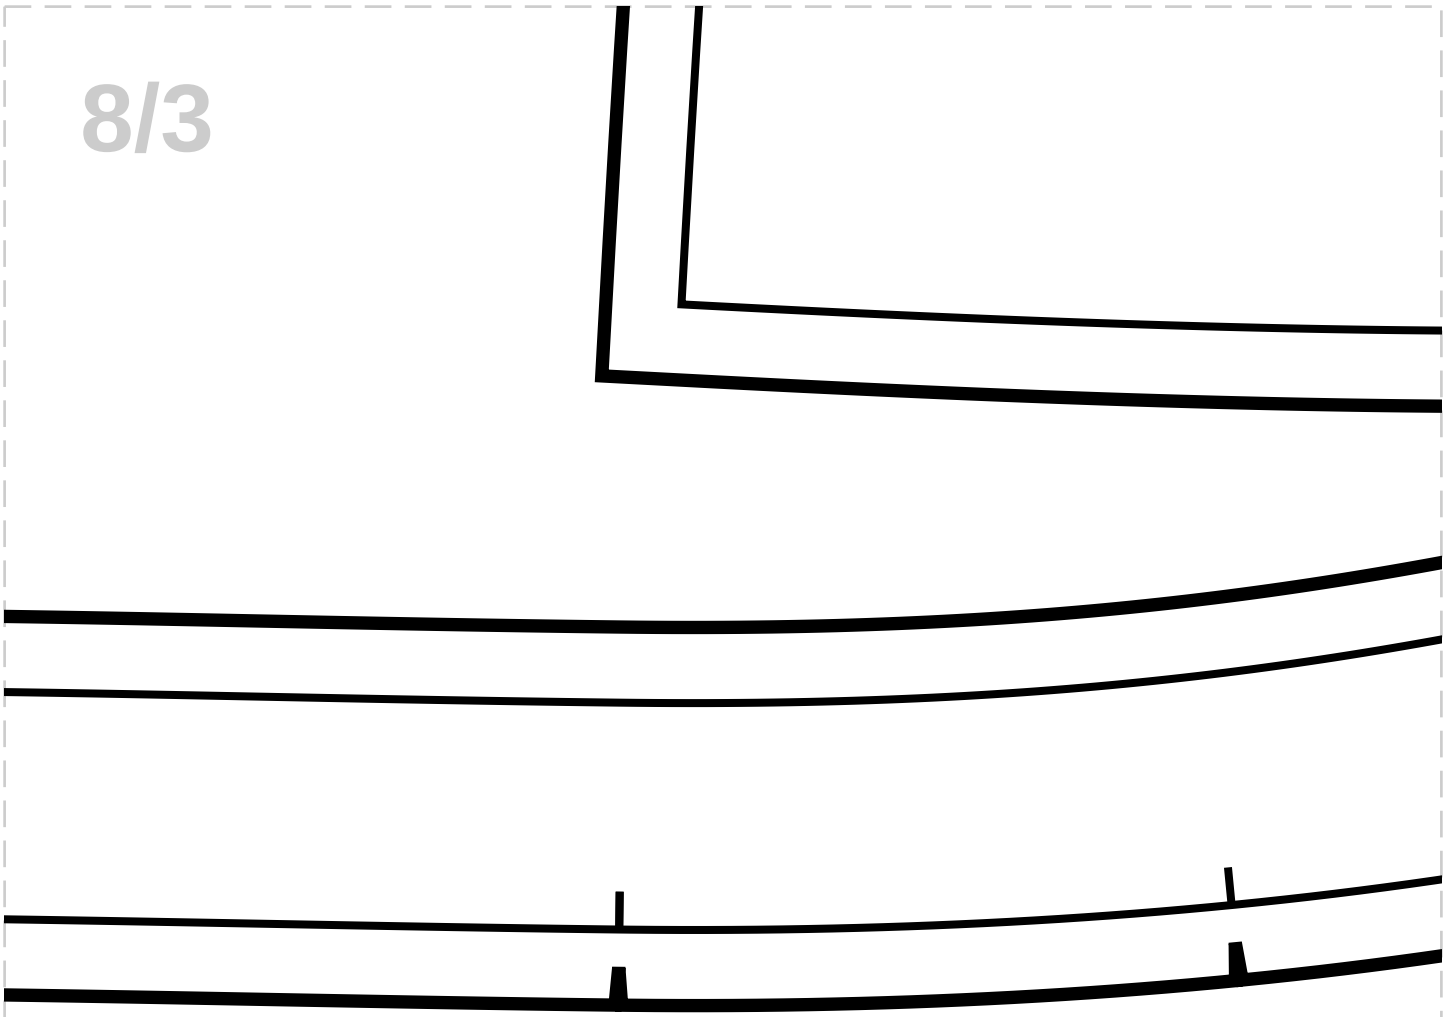

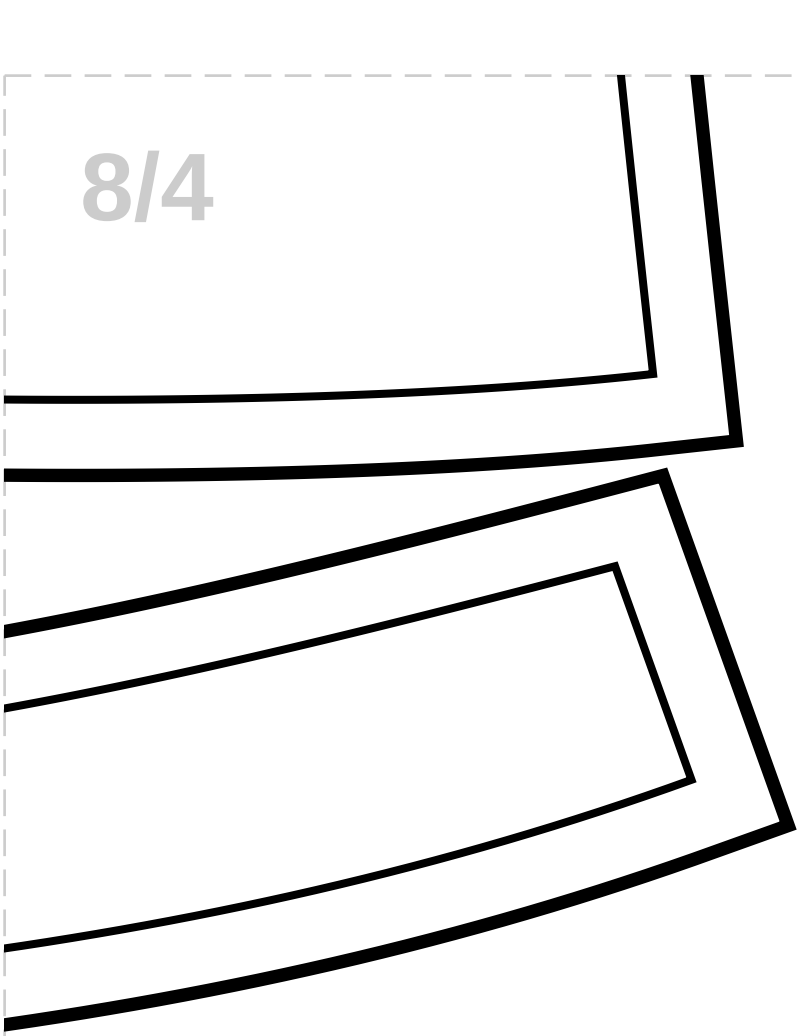

8/5