

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 95.25, Waist: 78.75, Hips: 102.75

Notes

How to print Printing


Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

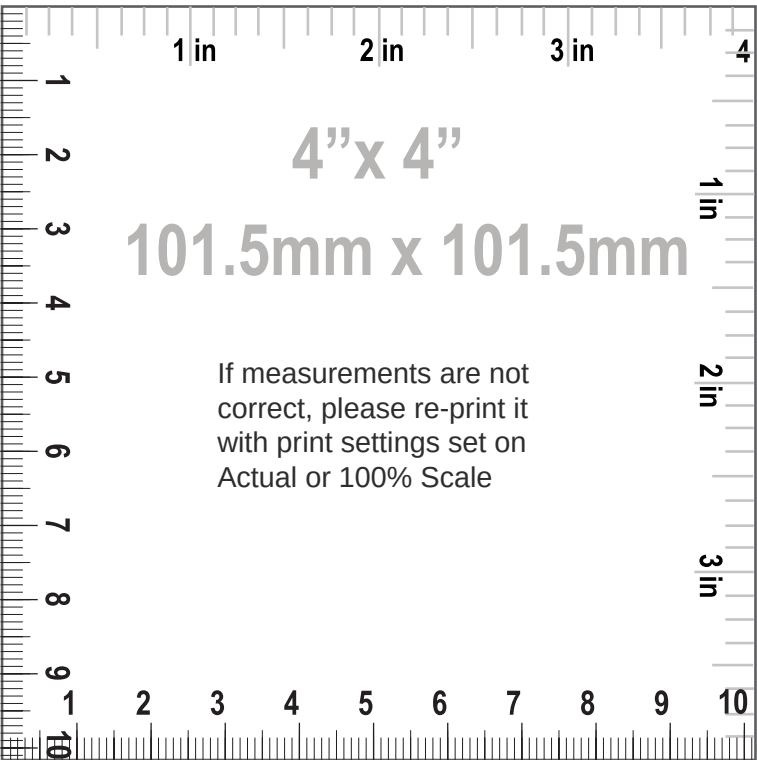

Seam Allowance: 1 (3/8 in)

Pattern pieces:


1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "FRONT BOTTOM RUFFLE", MAIN FABRIC: Cut 1
5. "BACK BOTTOM RUFFLE", MAIN FABRIC: Cut 1
6. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
7. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
8. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 8.66 cm (3 3/8 in)
8. Button diameter 1.00 cm (3/8 in)
9. Front buttons quantity 7.00 pc
10. Front length from HPS to hem 52.98 cm (20 7/8 in)
11. Across chest 50.38 cm (19 7/8 in)
12. Center front length to hem 44.52 cm (17 1/2 in)
13. Center back length to hem 49.41 cm (19 1/2 in)
14. Across front 36.83 cm (14 1/2 in)
15. Across back 35.11 cm (13 7/8 in)
16. Across shoulders 40.20 cm (15 7/8 in)
17. Side seam 23.88 cm (9 3/8 in)
18. Waist 42.98 cm (16 7/8 in)
19. Hemline sweep 50.13 cm (19 3/4 in)
20. Armhole length front 23.71 cm (9 3/8 in)
21. Armhole length back 27.74 cm (10 7/8 in)
22. Neck opening 15.37 cm (6 in)
23. Neckline length 43.48 cm (17 1/8 in)

- 24. Back neck drop 3.65 cm (1 3/8 in)
- 25. Shoulder width 12.14 cm (4 3/4 in)
- 26. Bust dart to bust dart 23.66 cm (9 3/8 in)
- 27. Sleeve length 63.09 cm (24 7/8 in)
- 28. Sleeve gather cap 13.80 cm (5 3/8 in)
- 29. Sleeve upper arm width 39.42 cm (15 1/2 in)
- 30. Sleeve opening 24.91 cm (9 3/4 in)
- 31. Ruffle front width 91.16 cm (35 7/8 in)
- 32. Ruffle back width 87.80 cm (34 5/8 in)
- 33. Ruffle length 15.00 cm (5 7/8 in)
- 34. Gather ruffle 79.54 cm (31 3/8 in)
- 35. Stand height 3.00 cm (1 1/8 in)
- 36. Collar length 43.47 cm (17 1/8 in)


Paper Size: A4;
Print Actual Size (100% Scale);

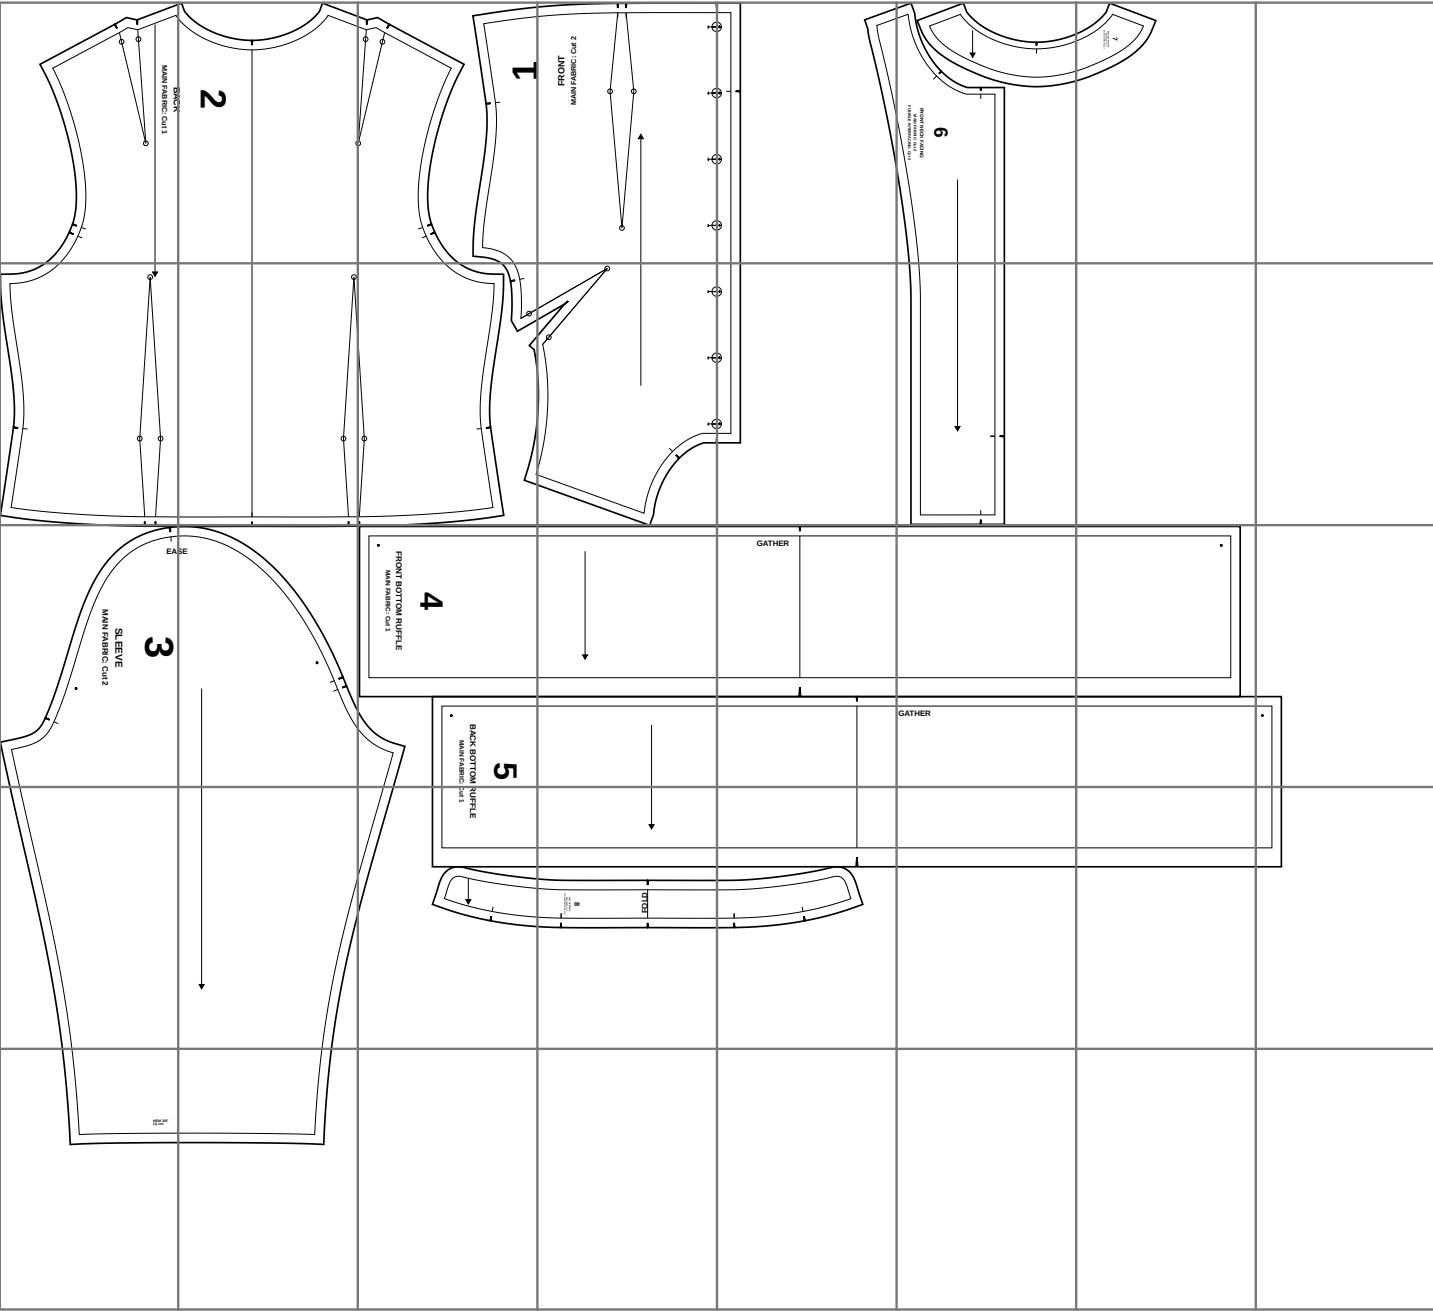


1/1

BACK

MAIN FABRIC: Cut 1

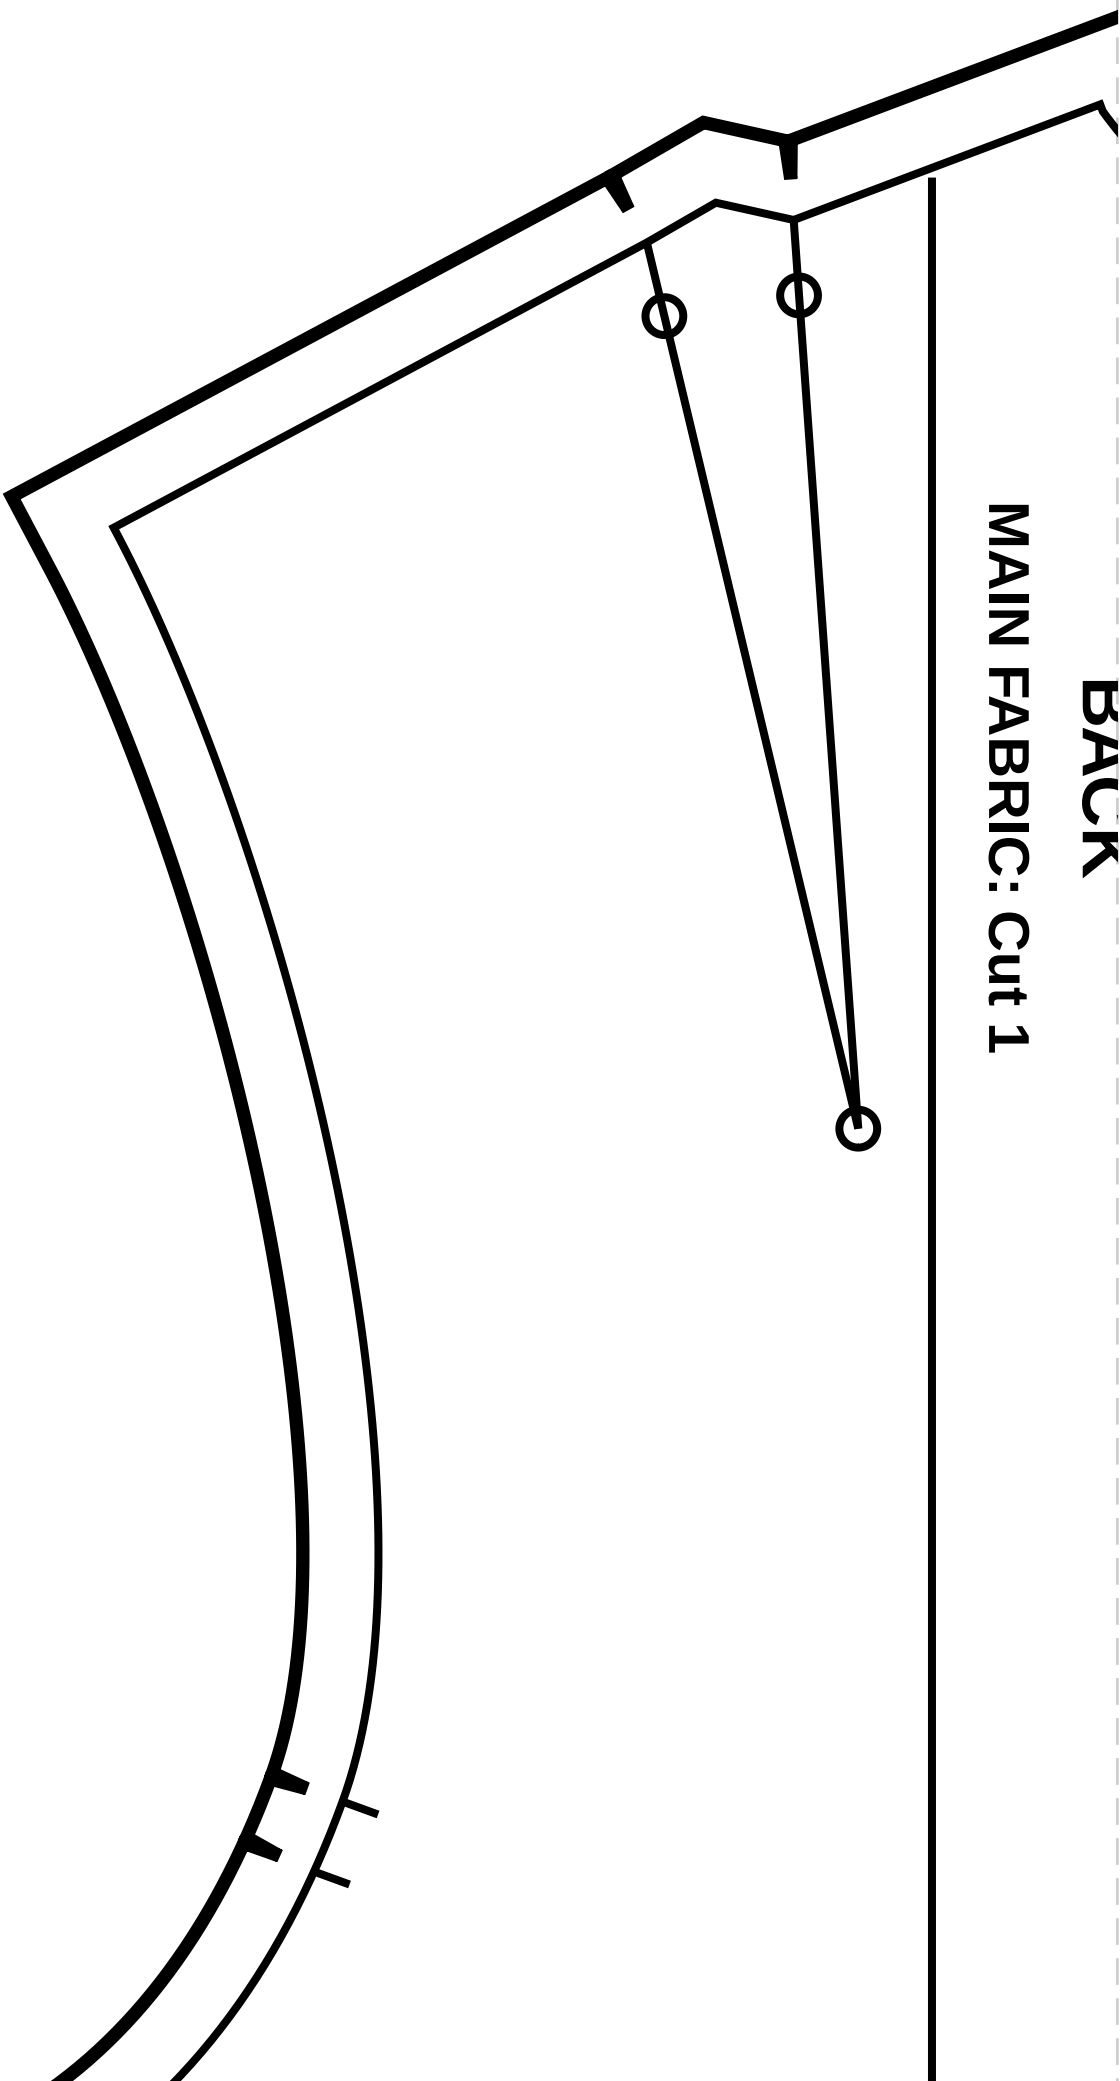


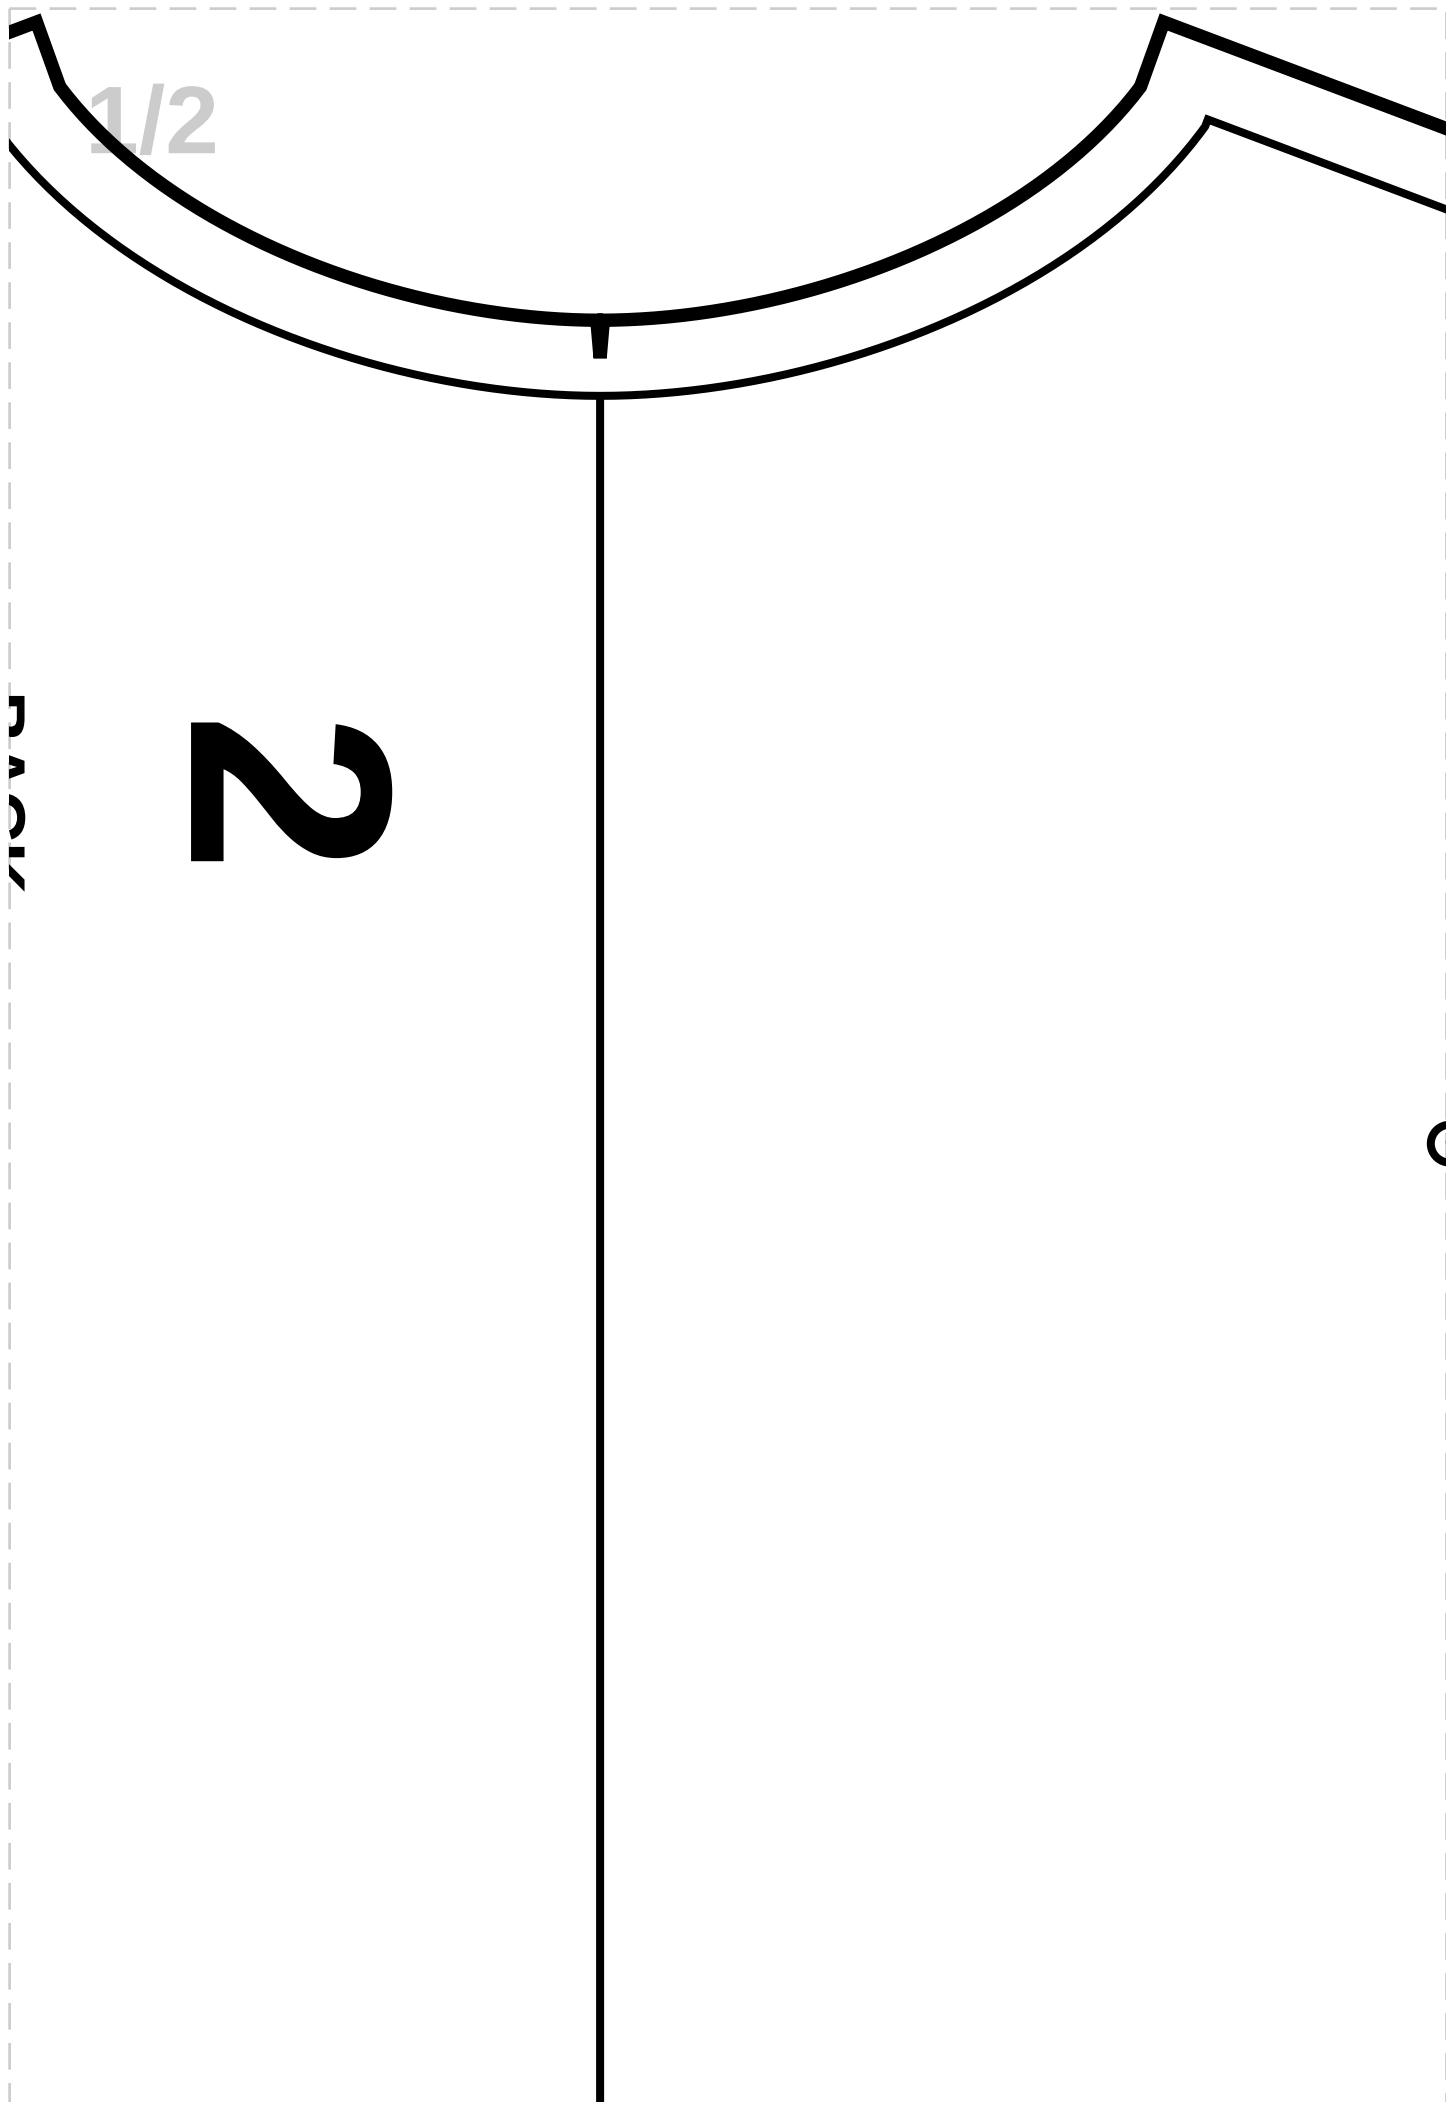



1/2


2

3

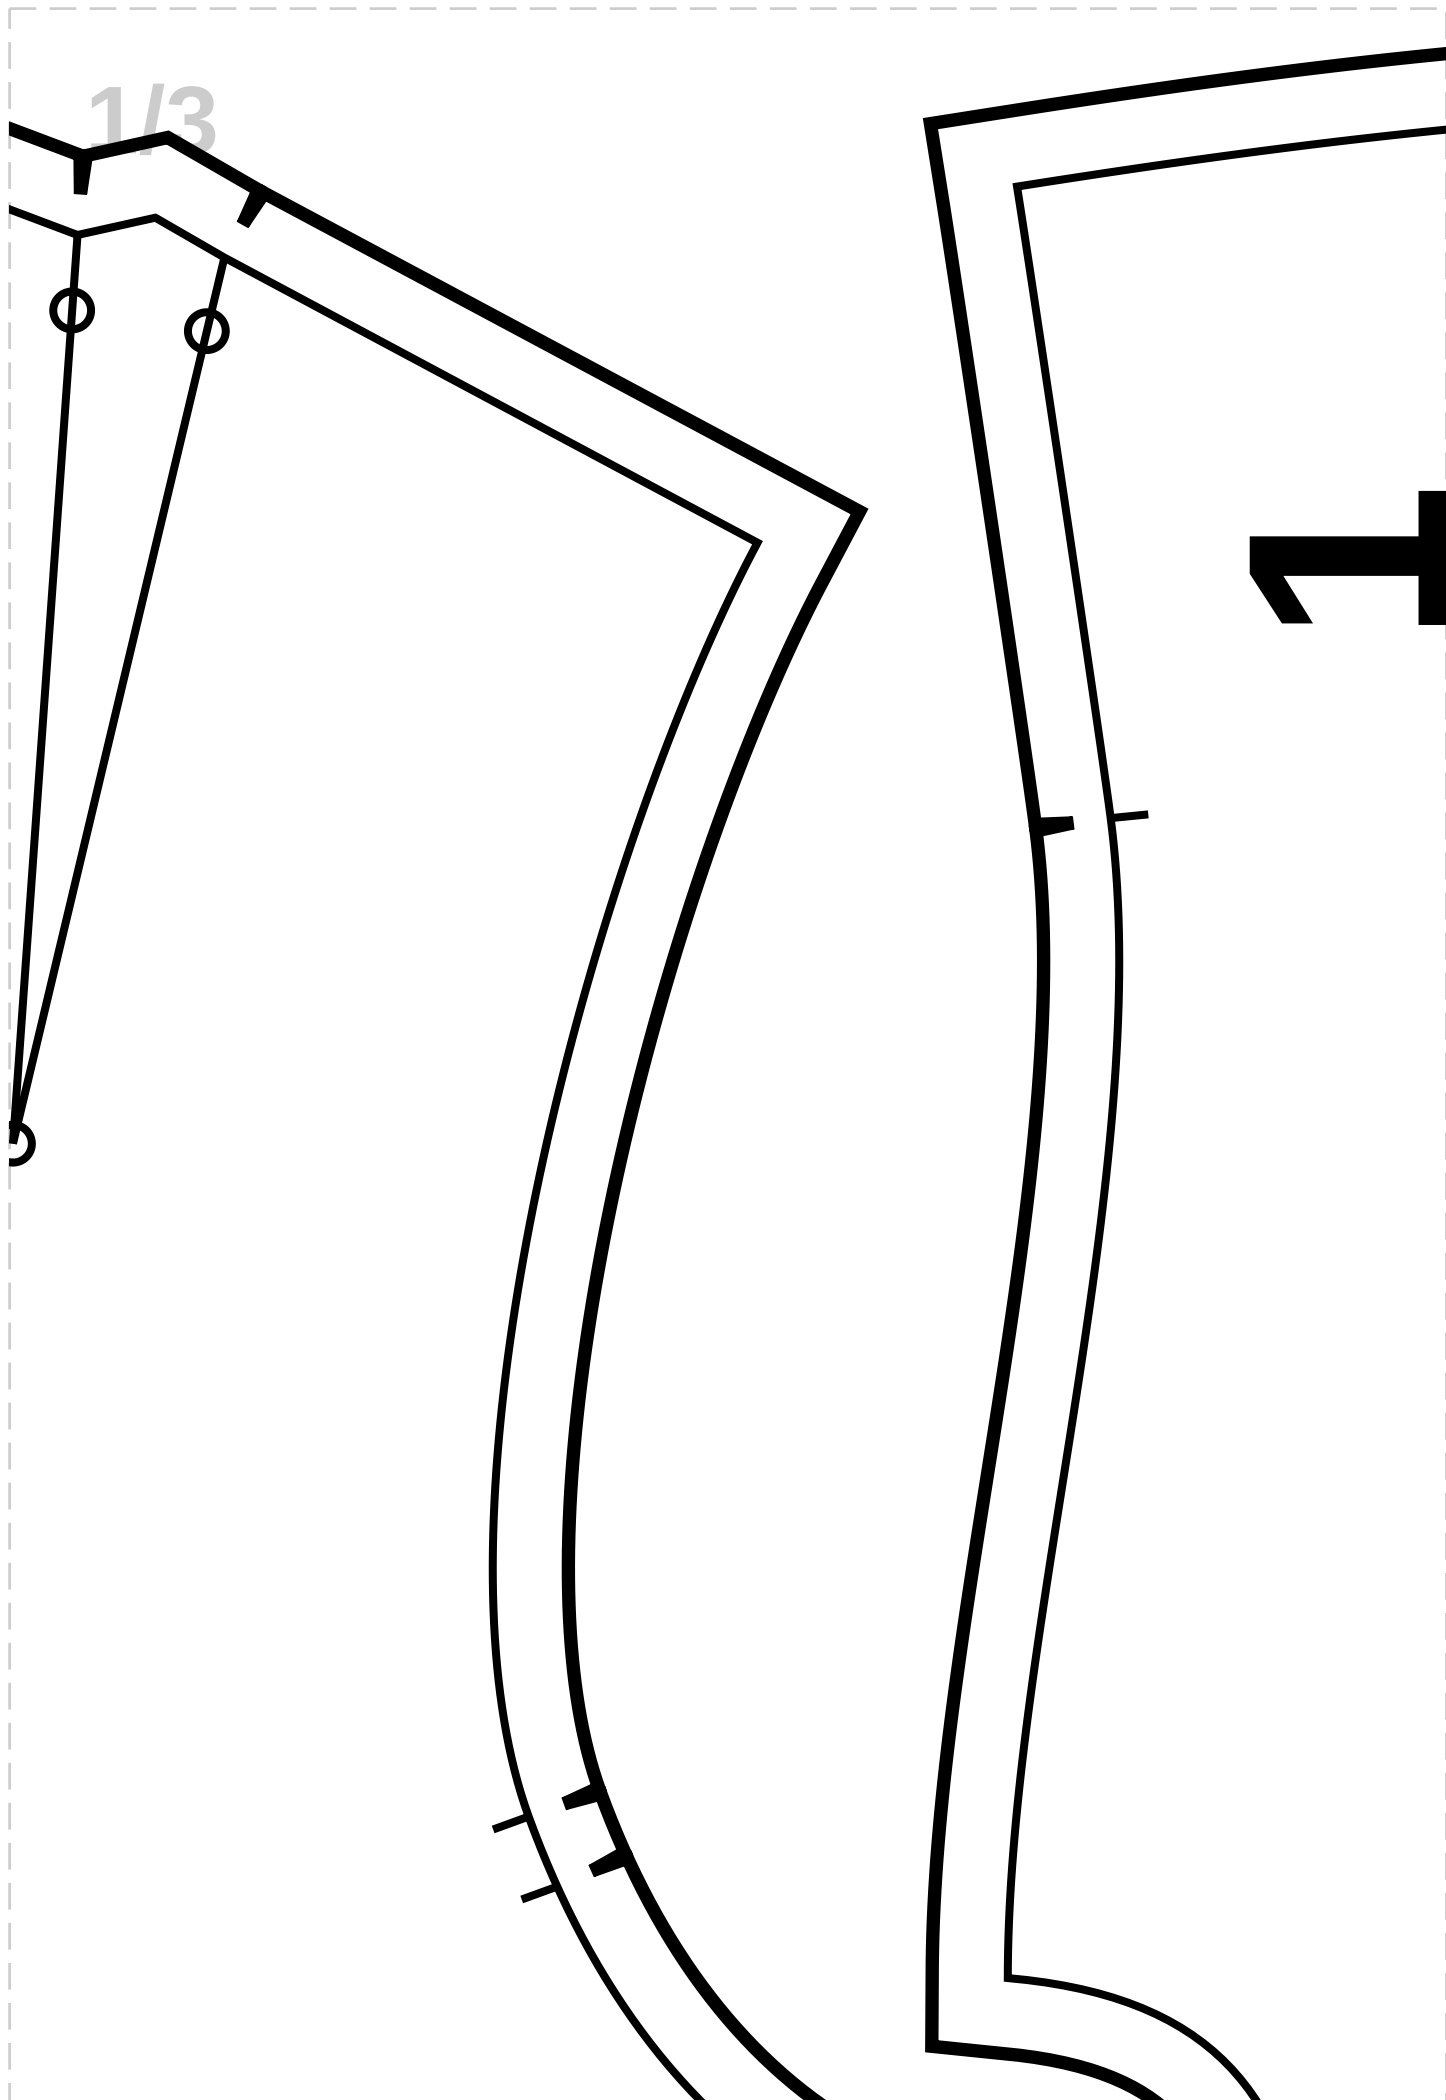

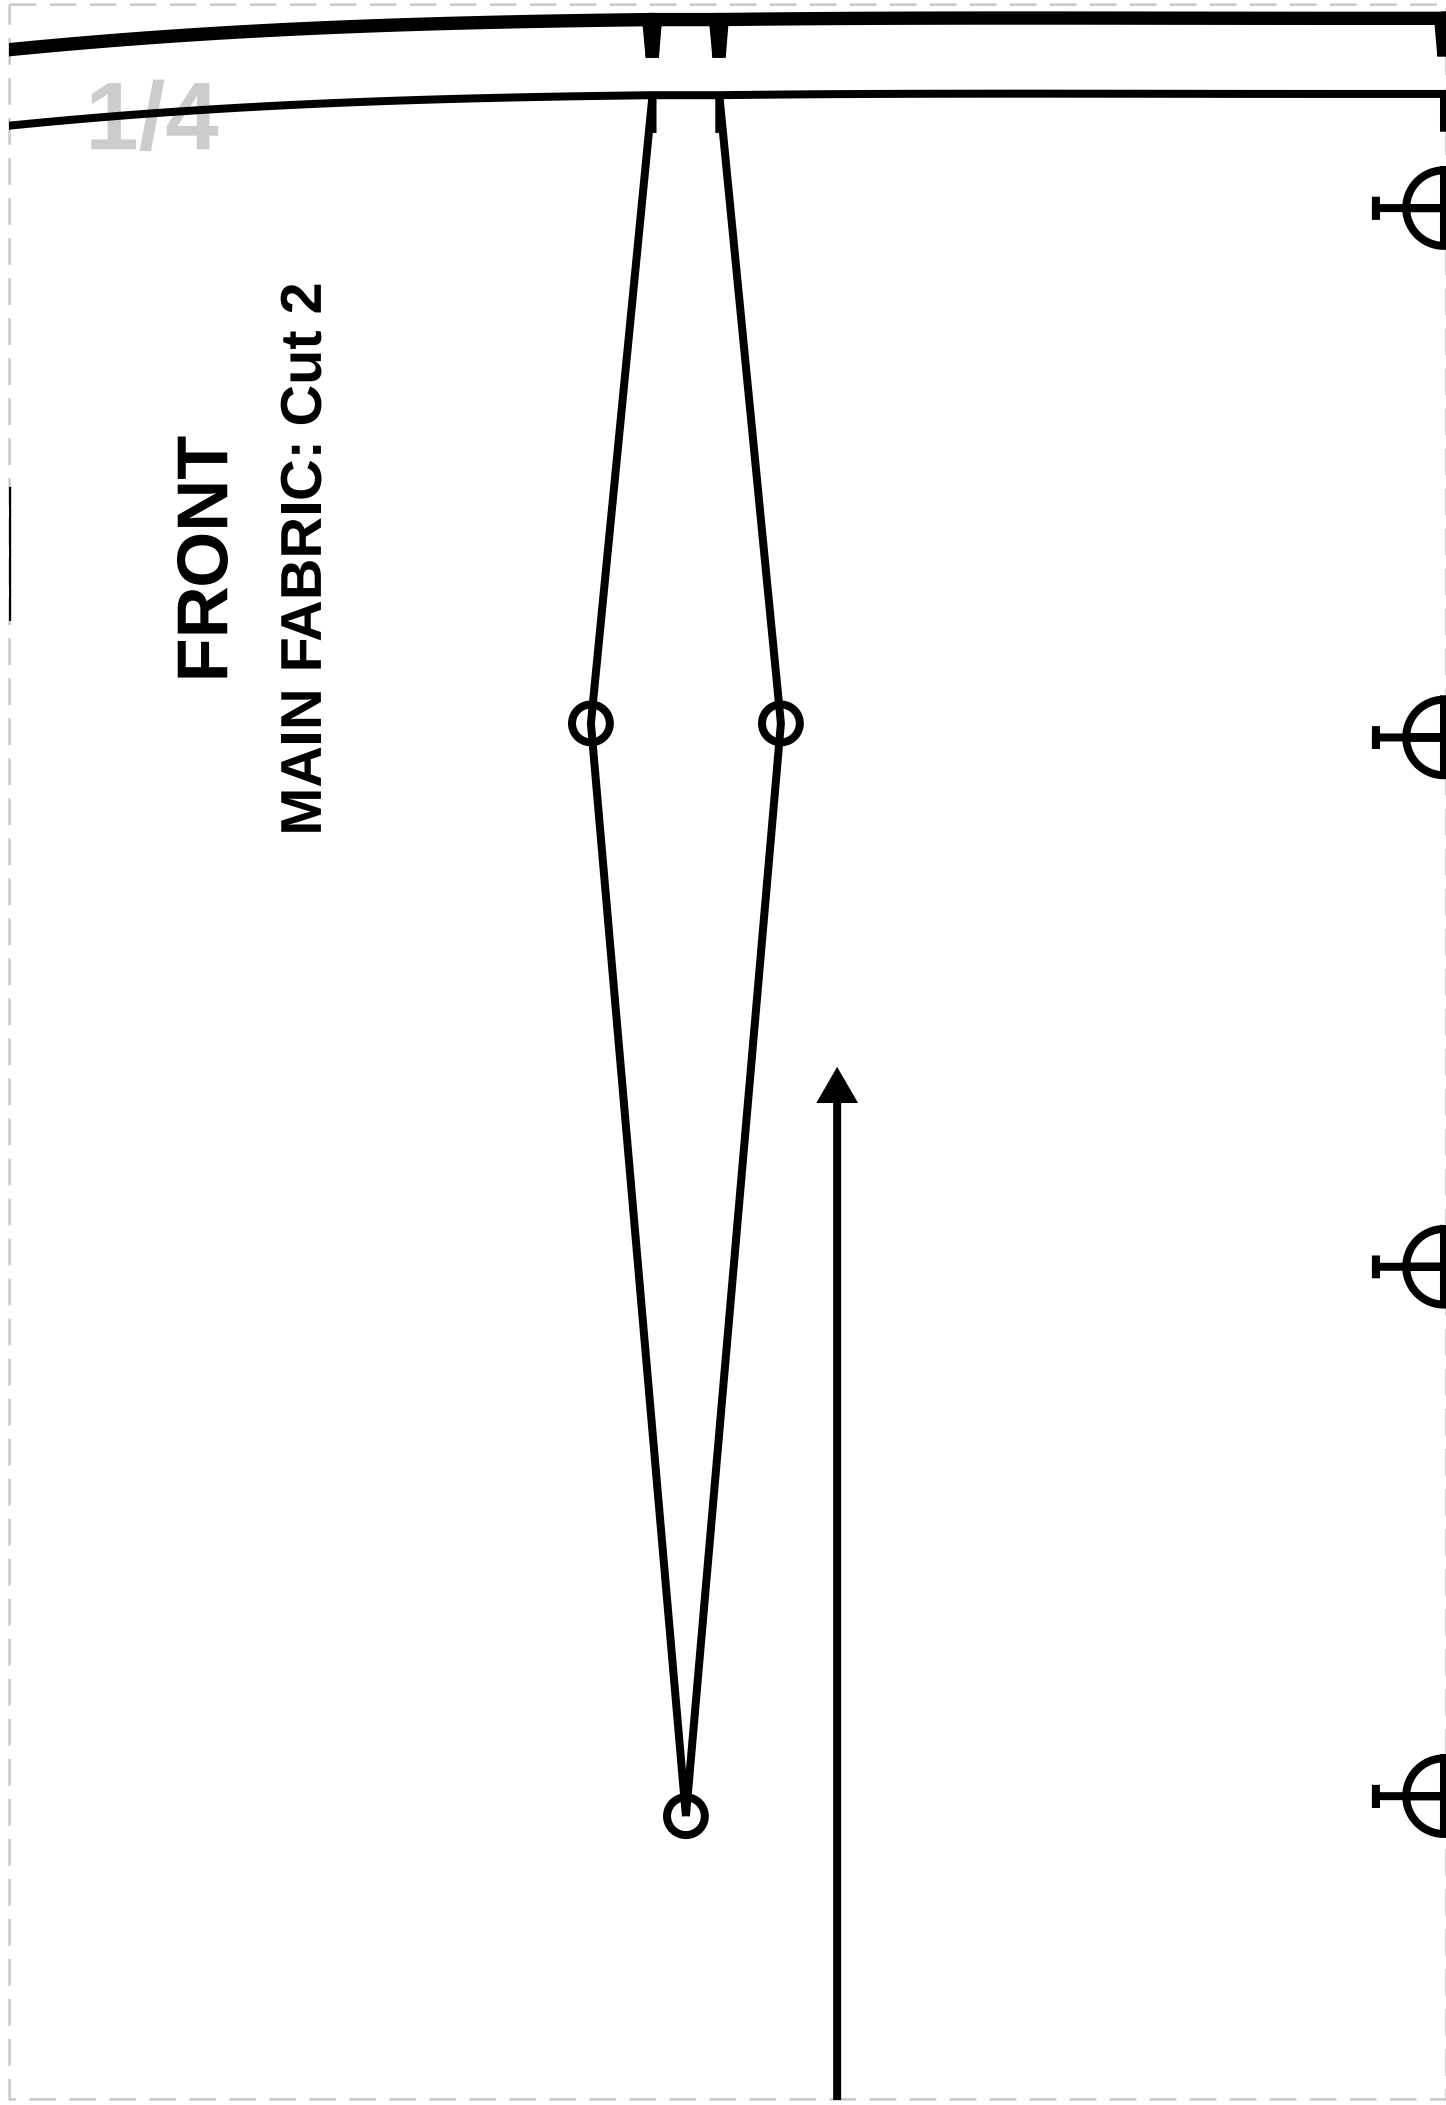

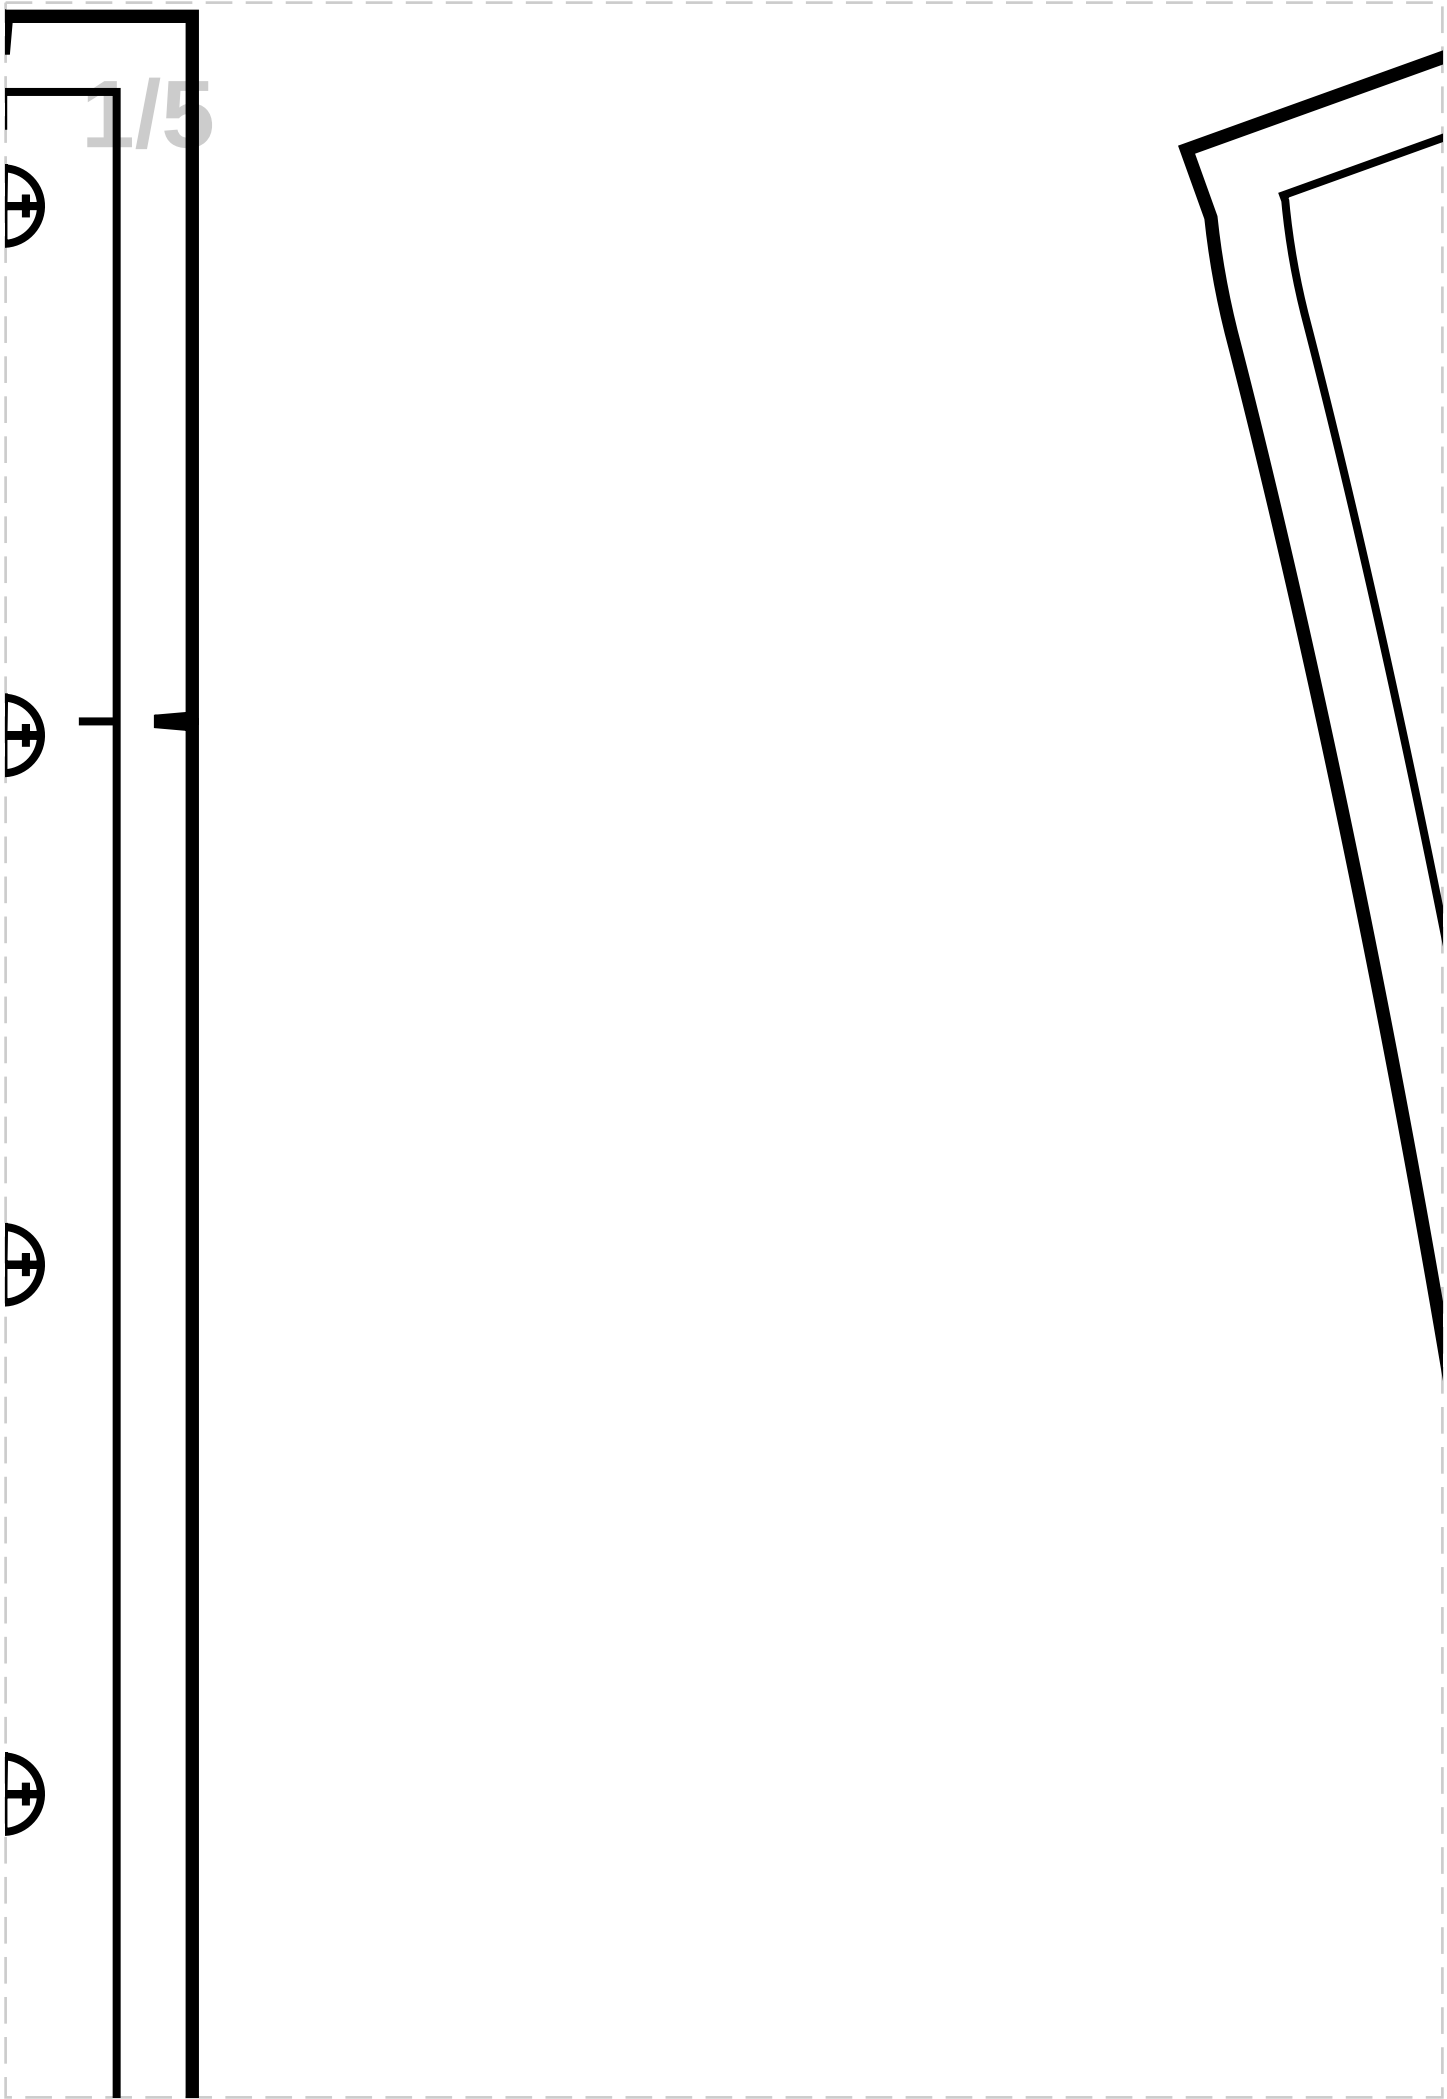


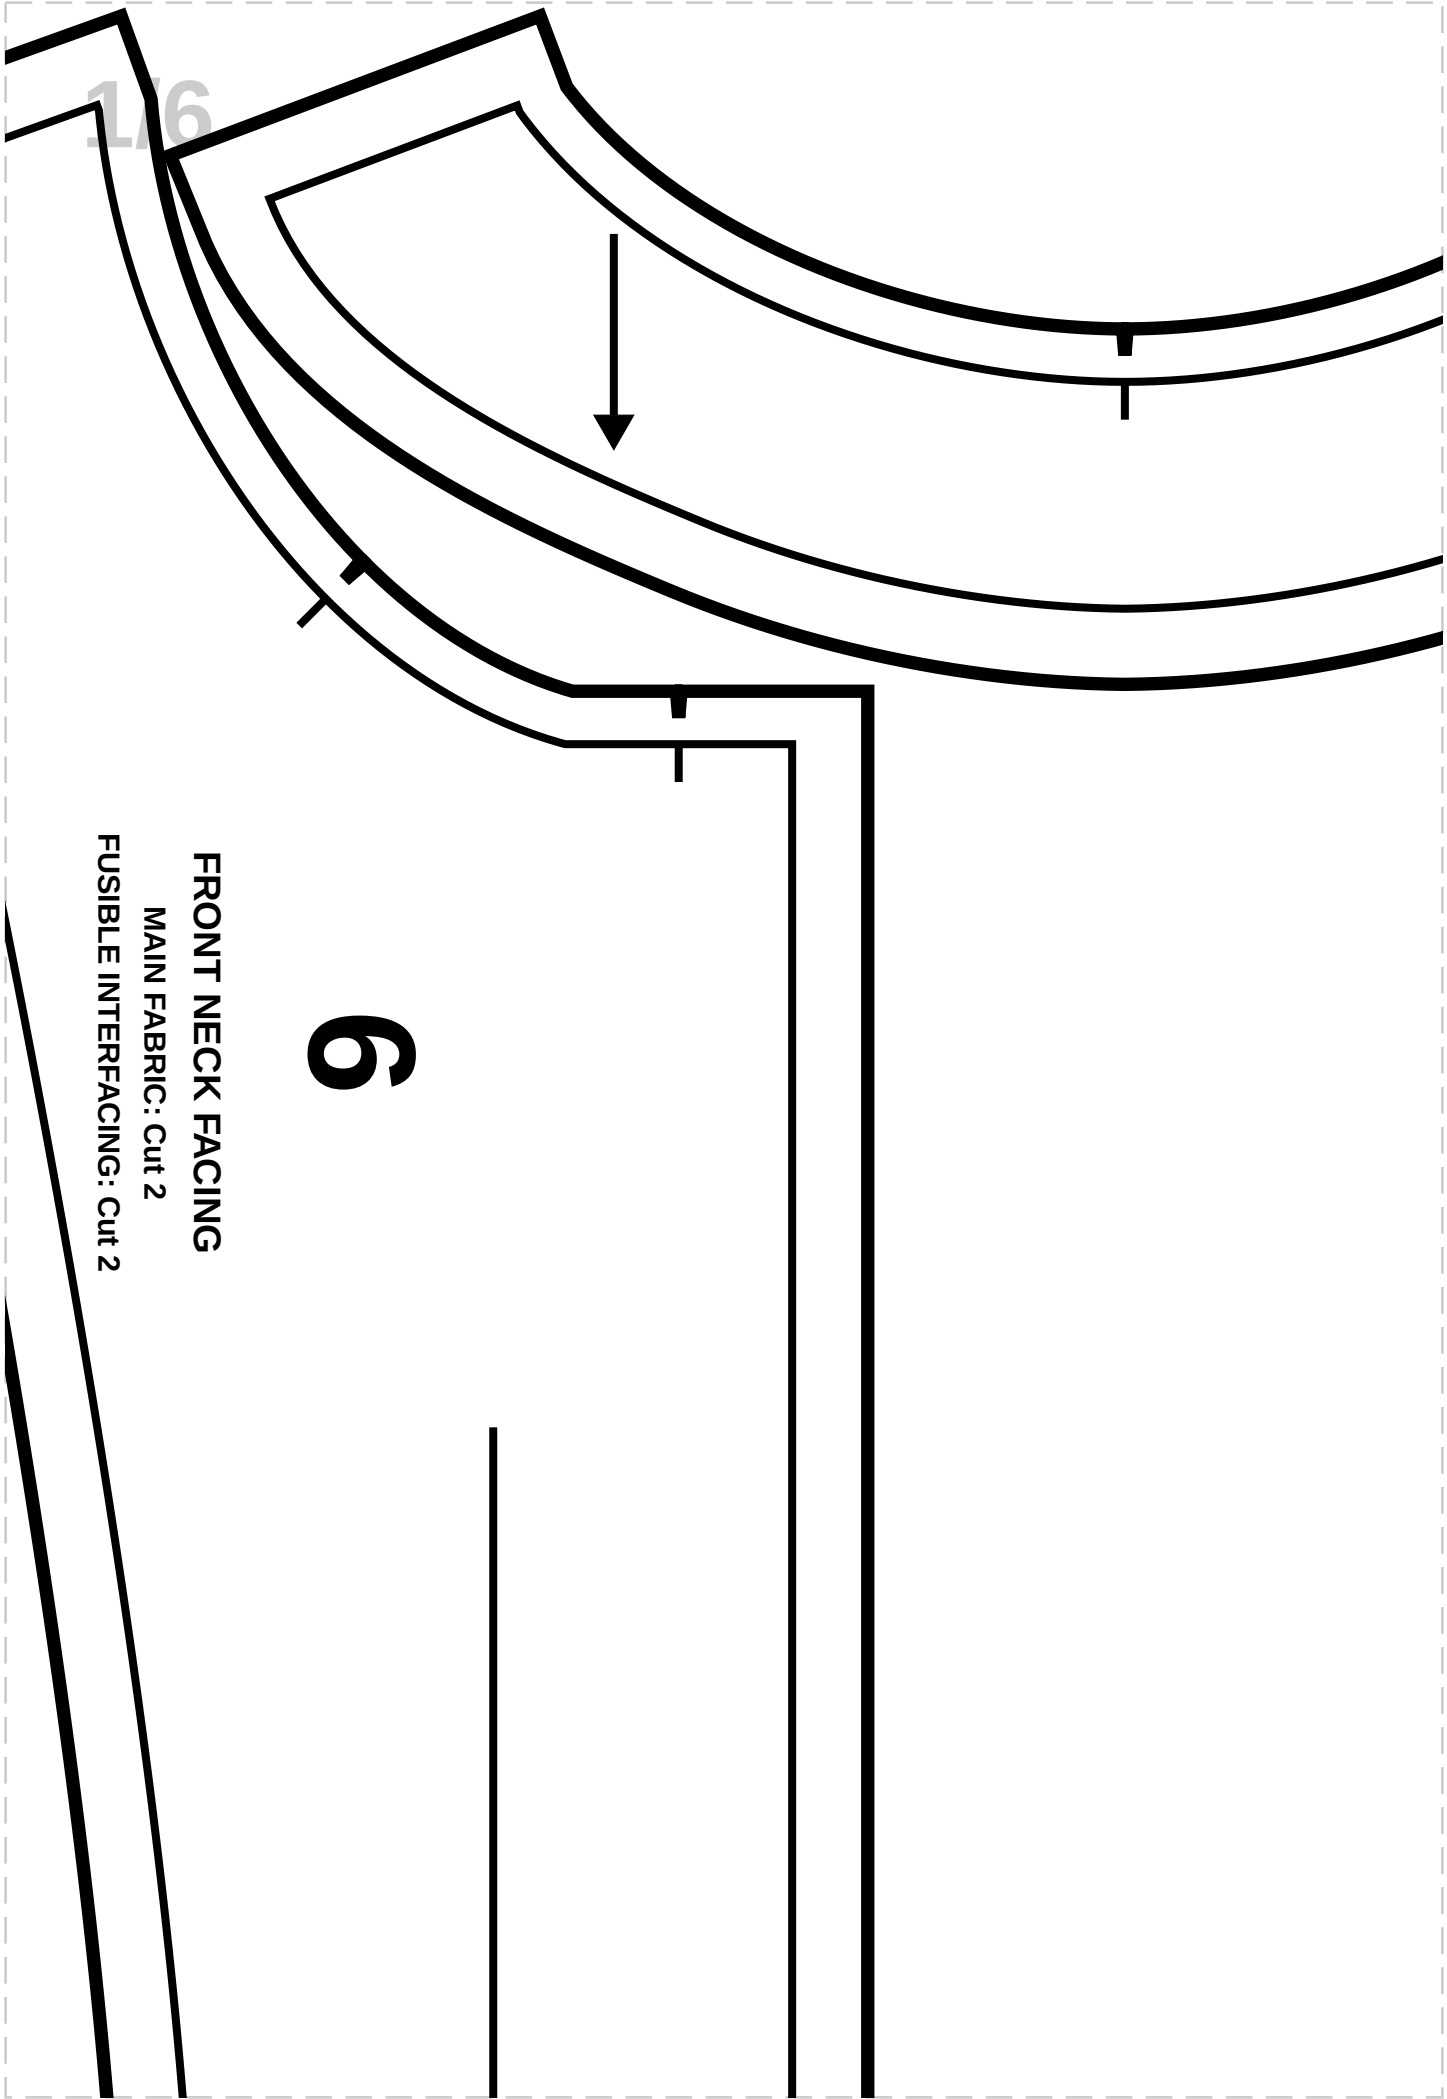


1/7

7


BACK NECK FACING
MAIN FABRIC: CUT 1
FUSIBLE INTERFACING: CUT 1

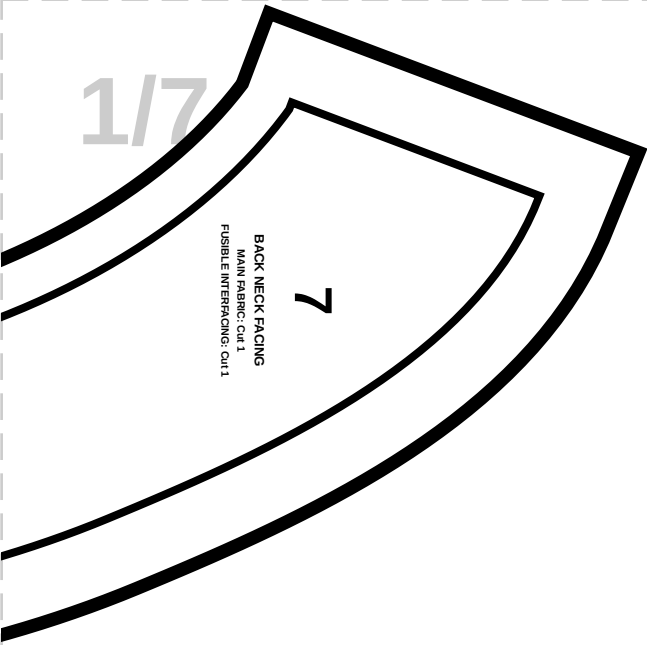


1/8

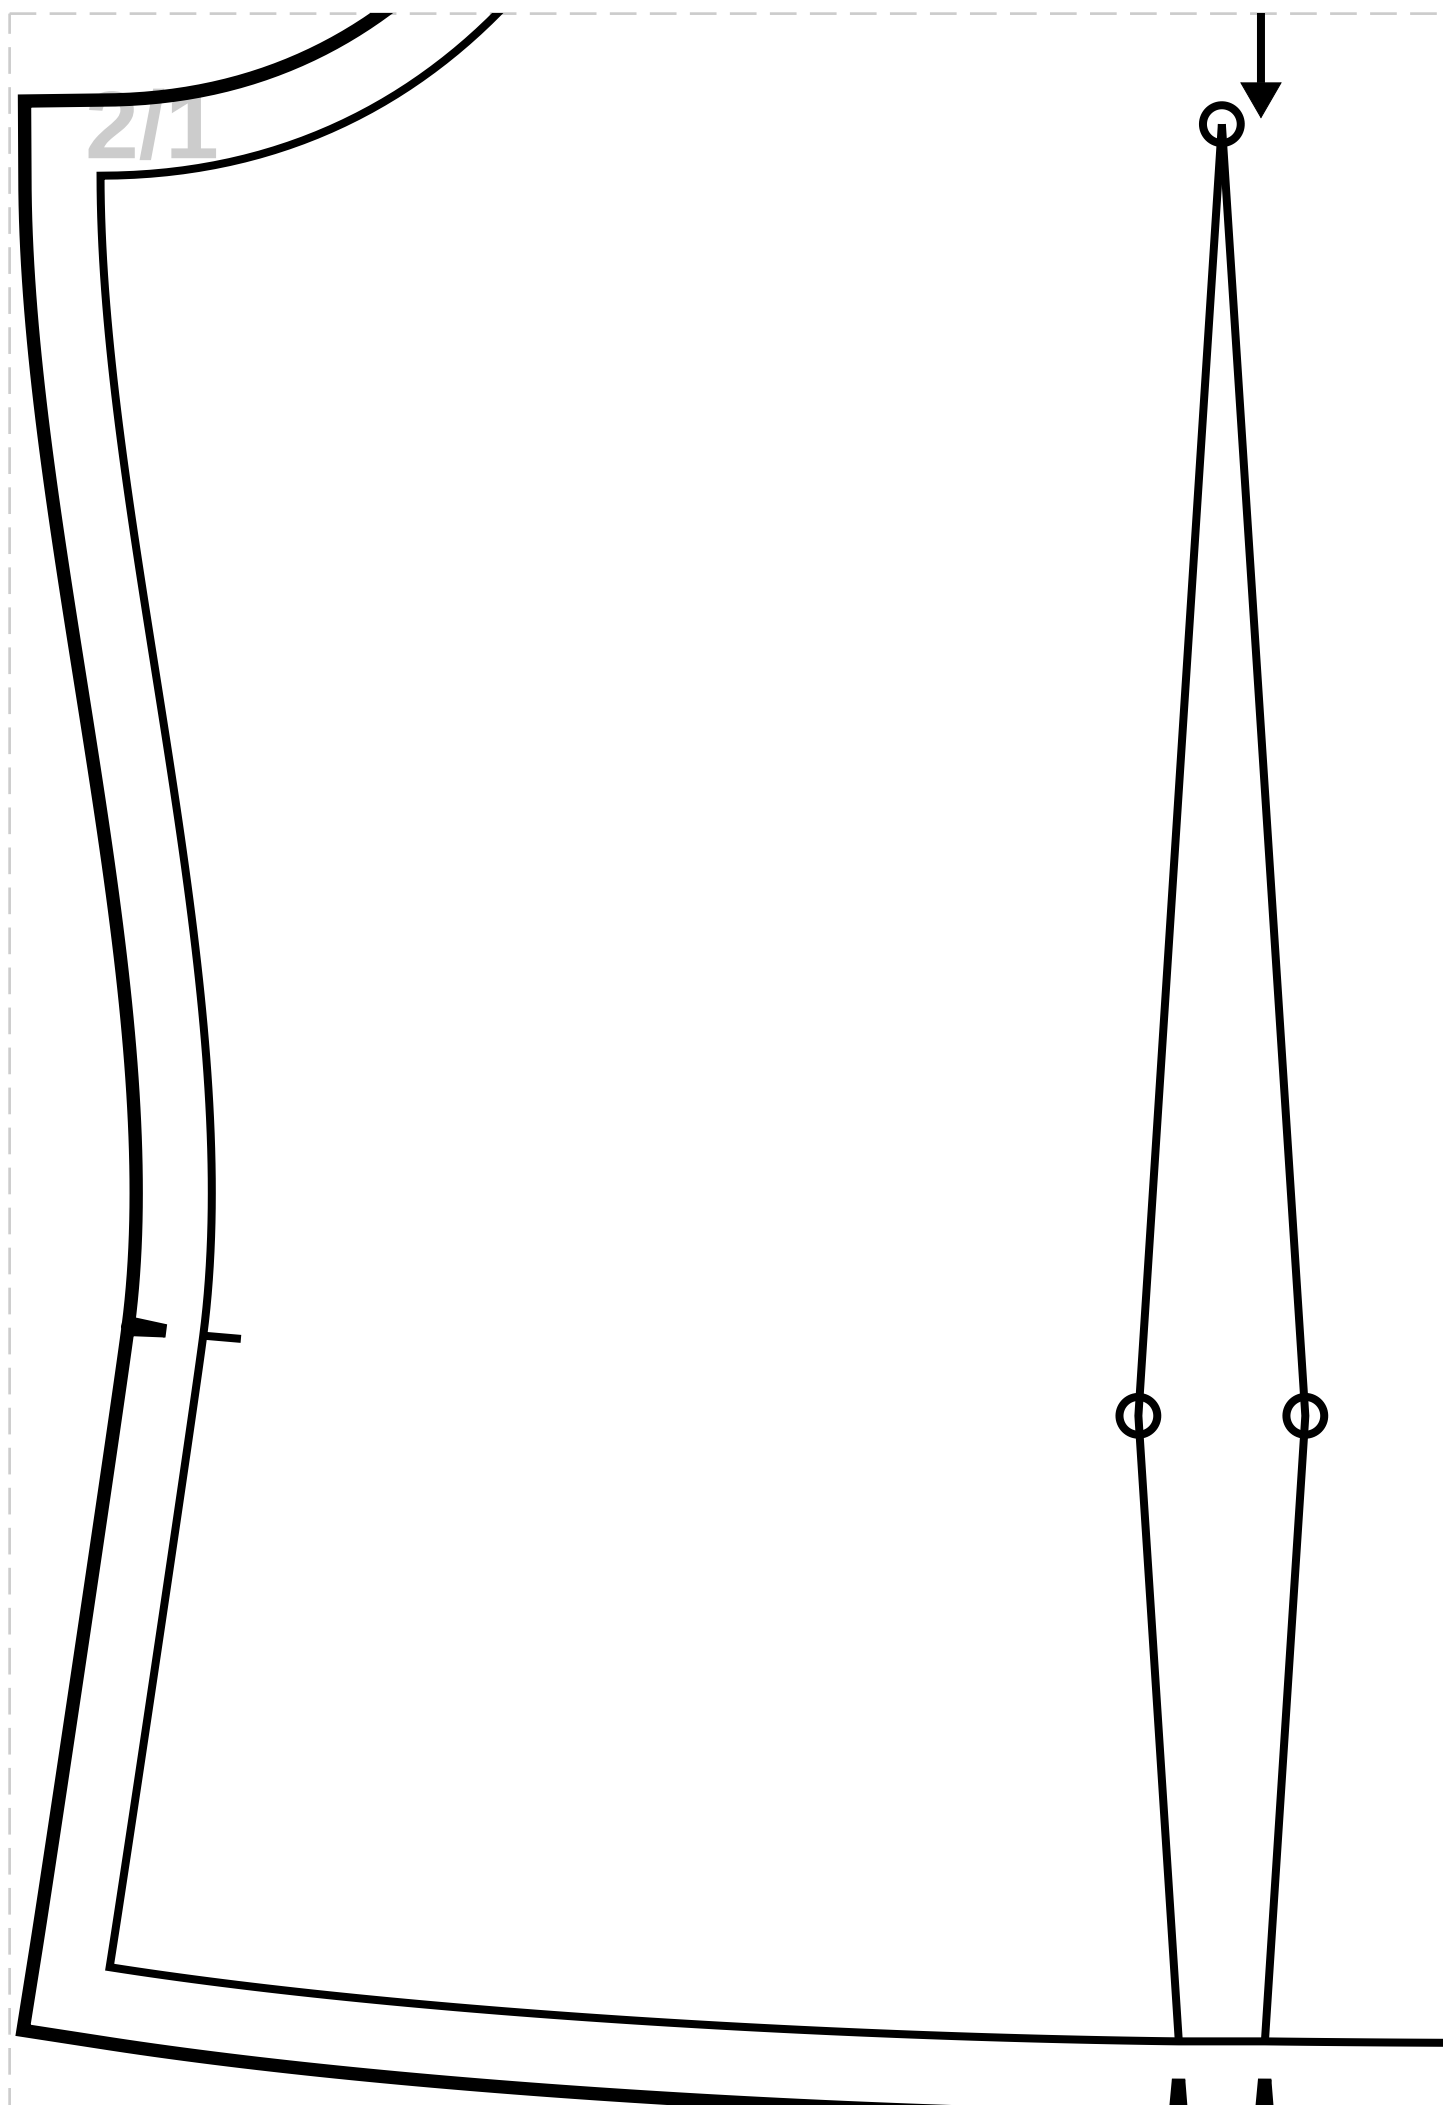


2/2

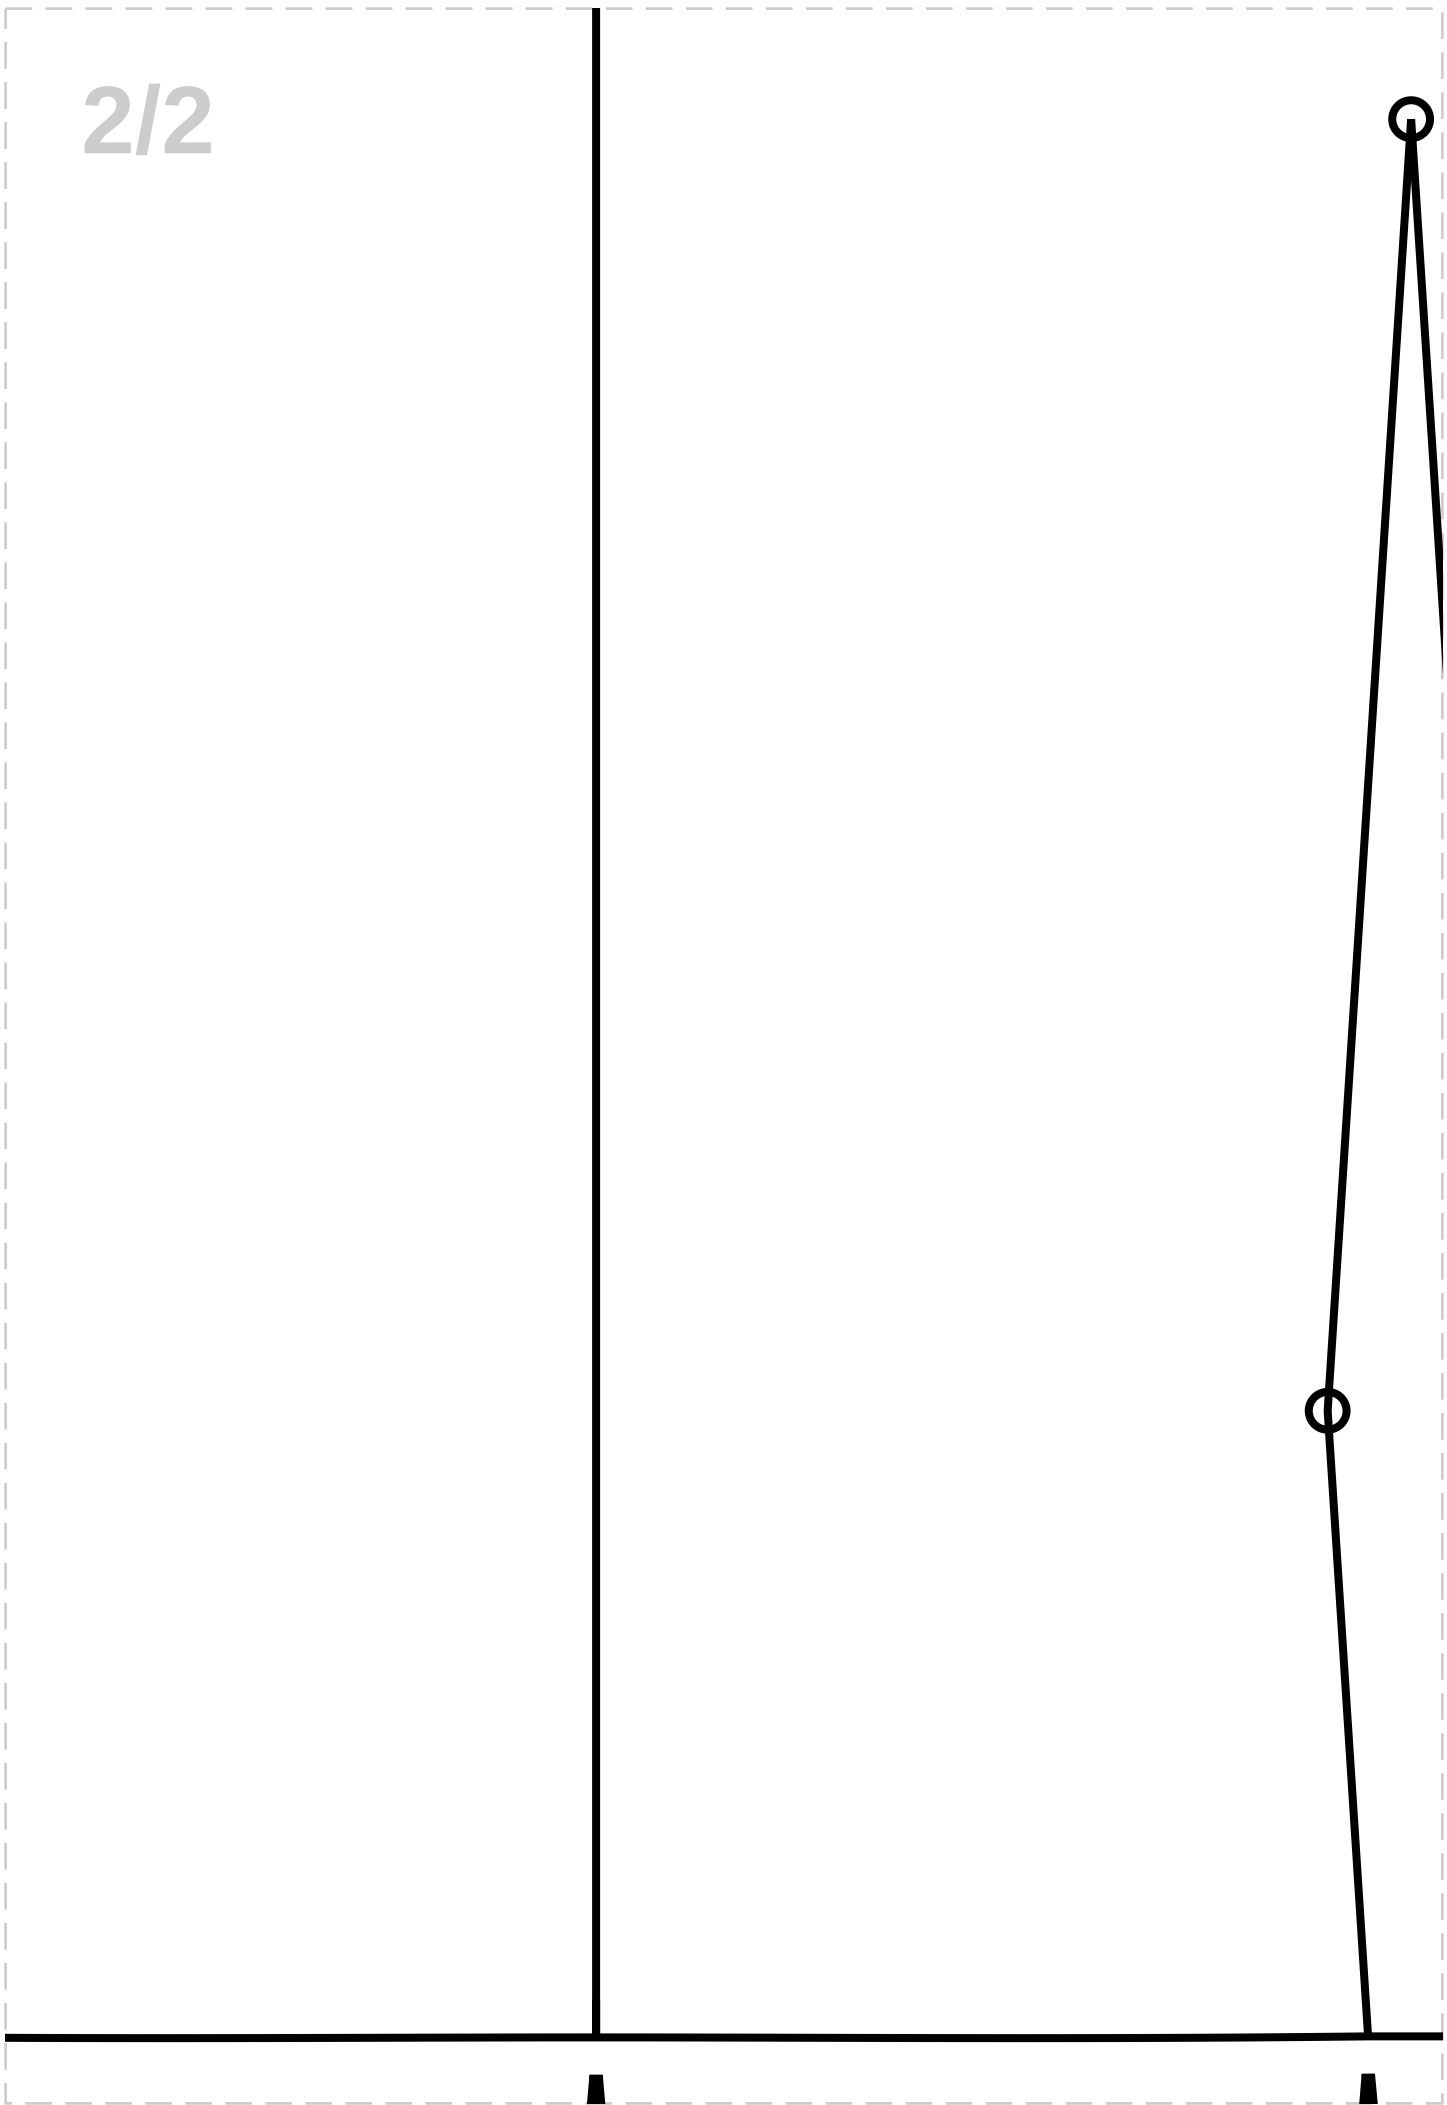

2/3

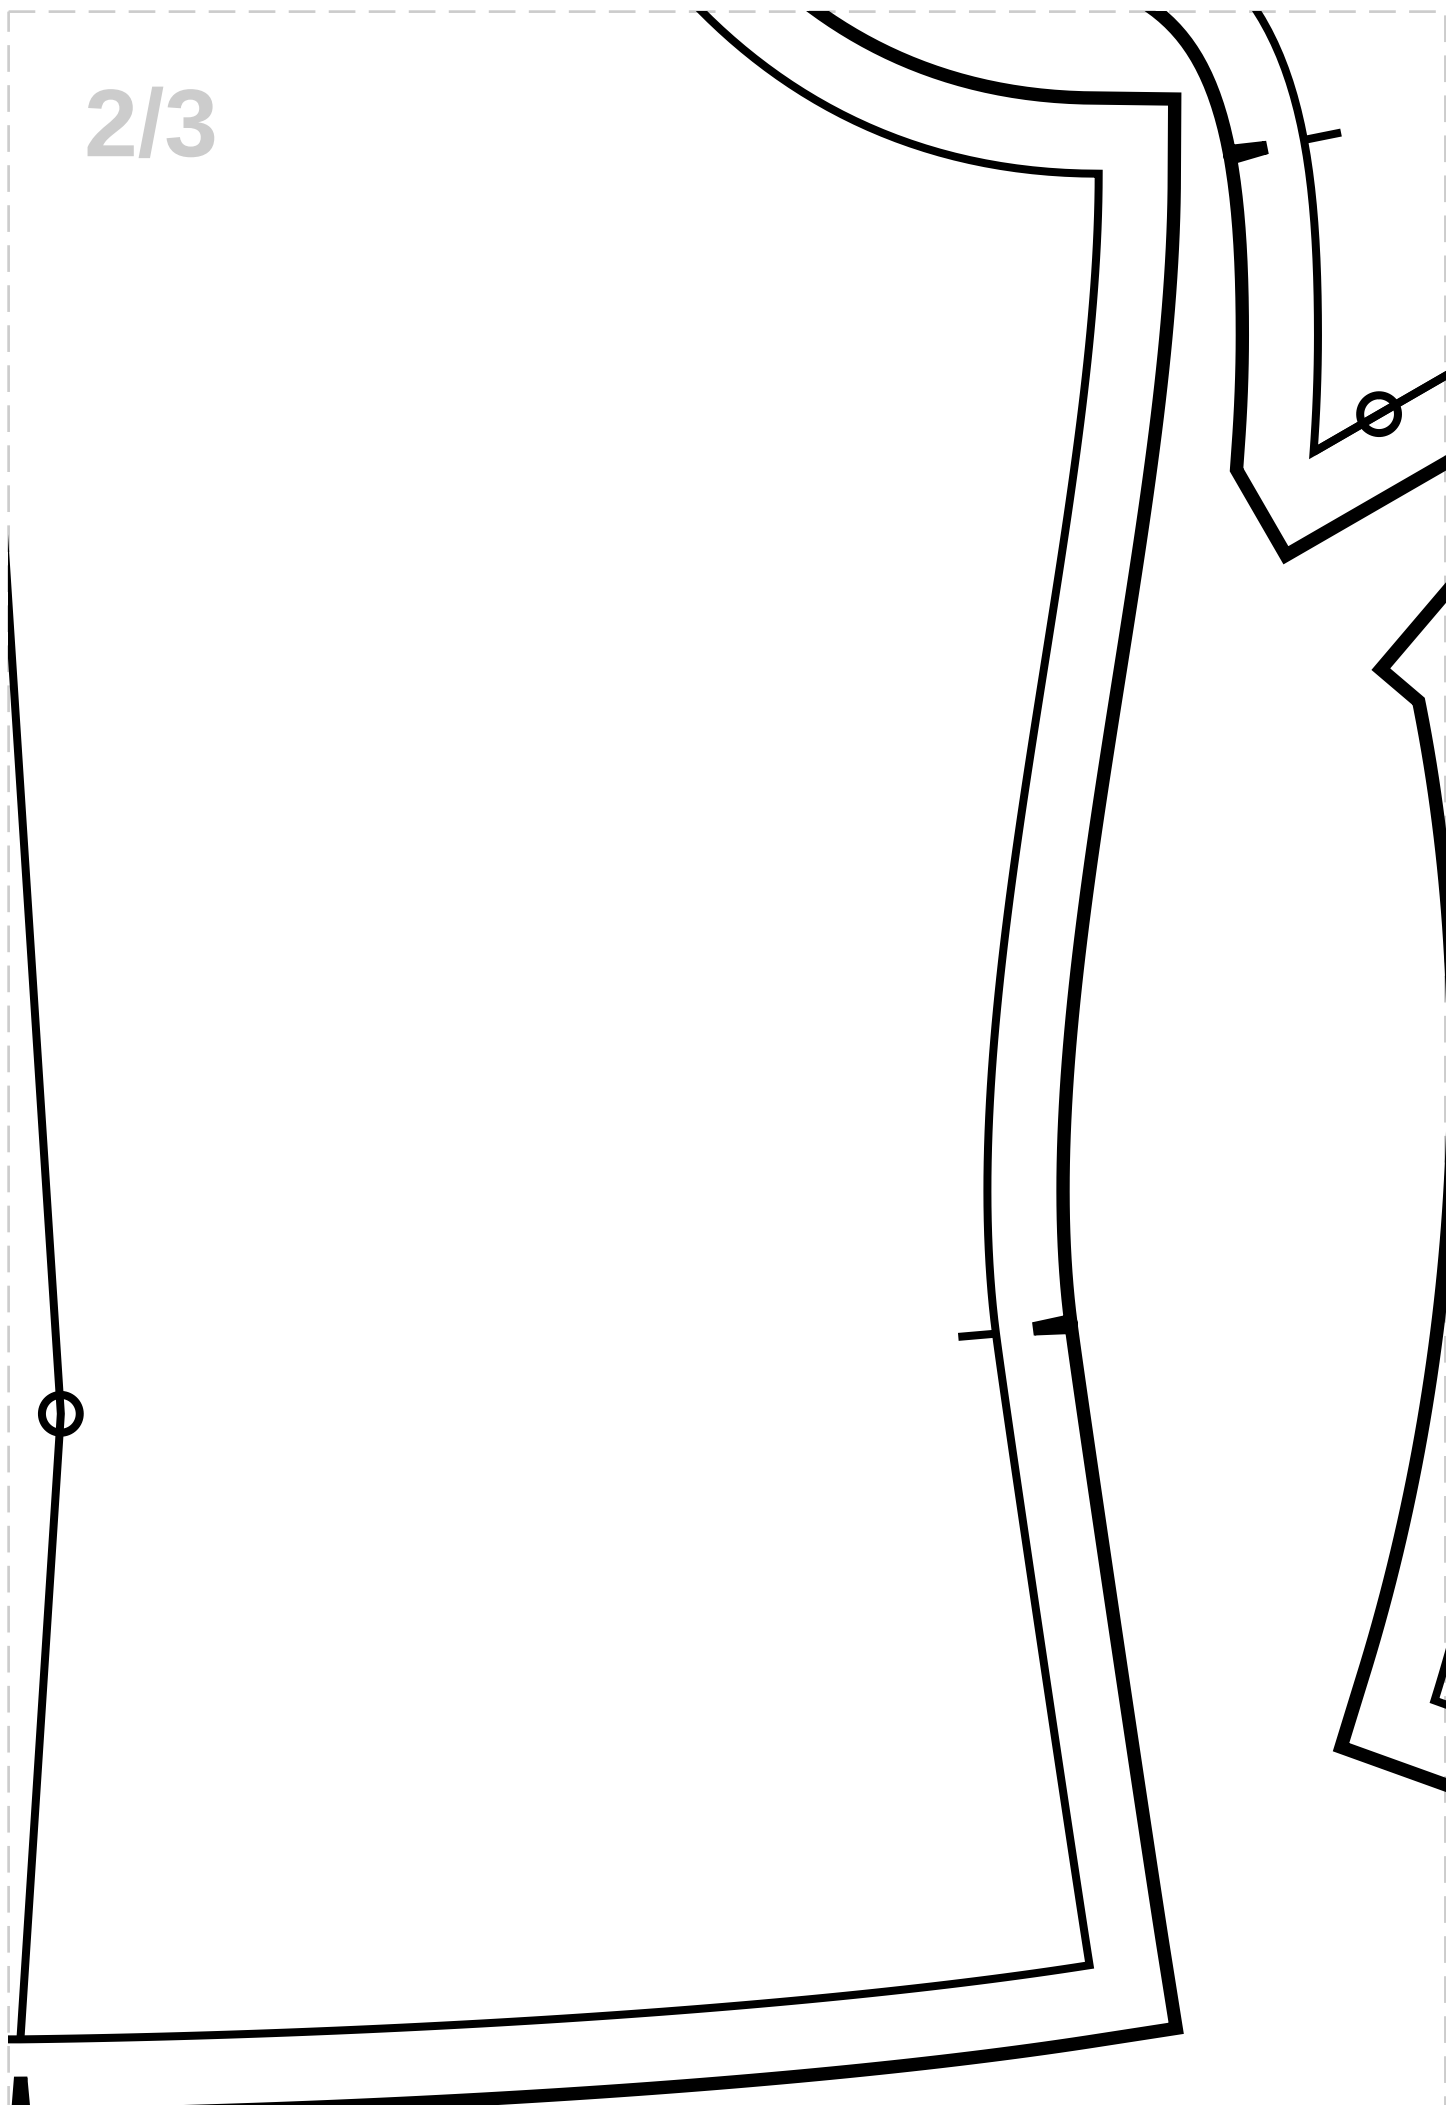


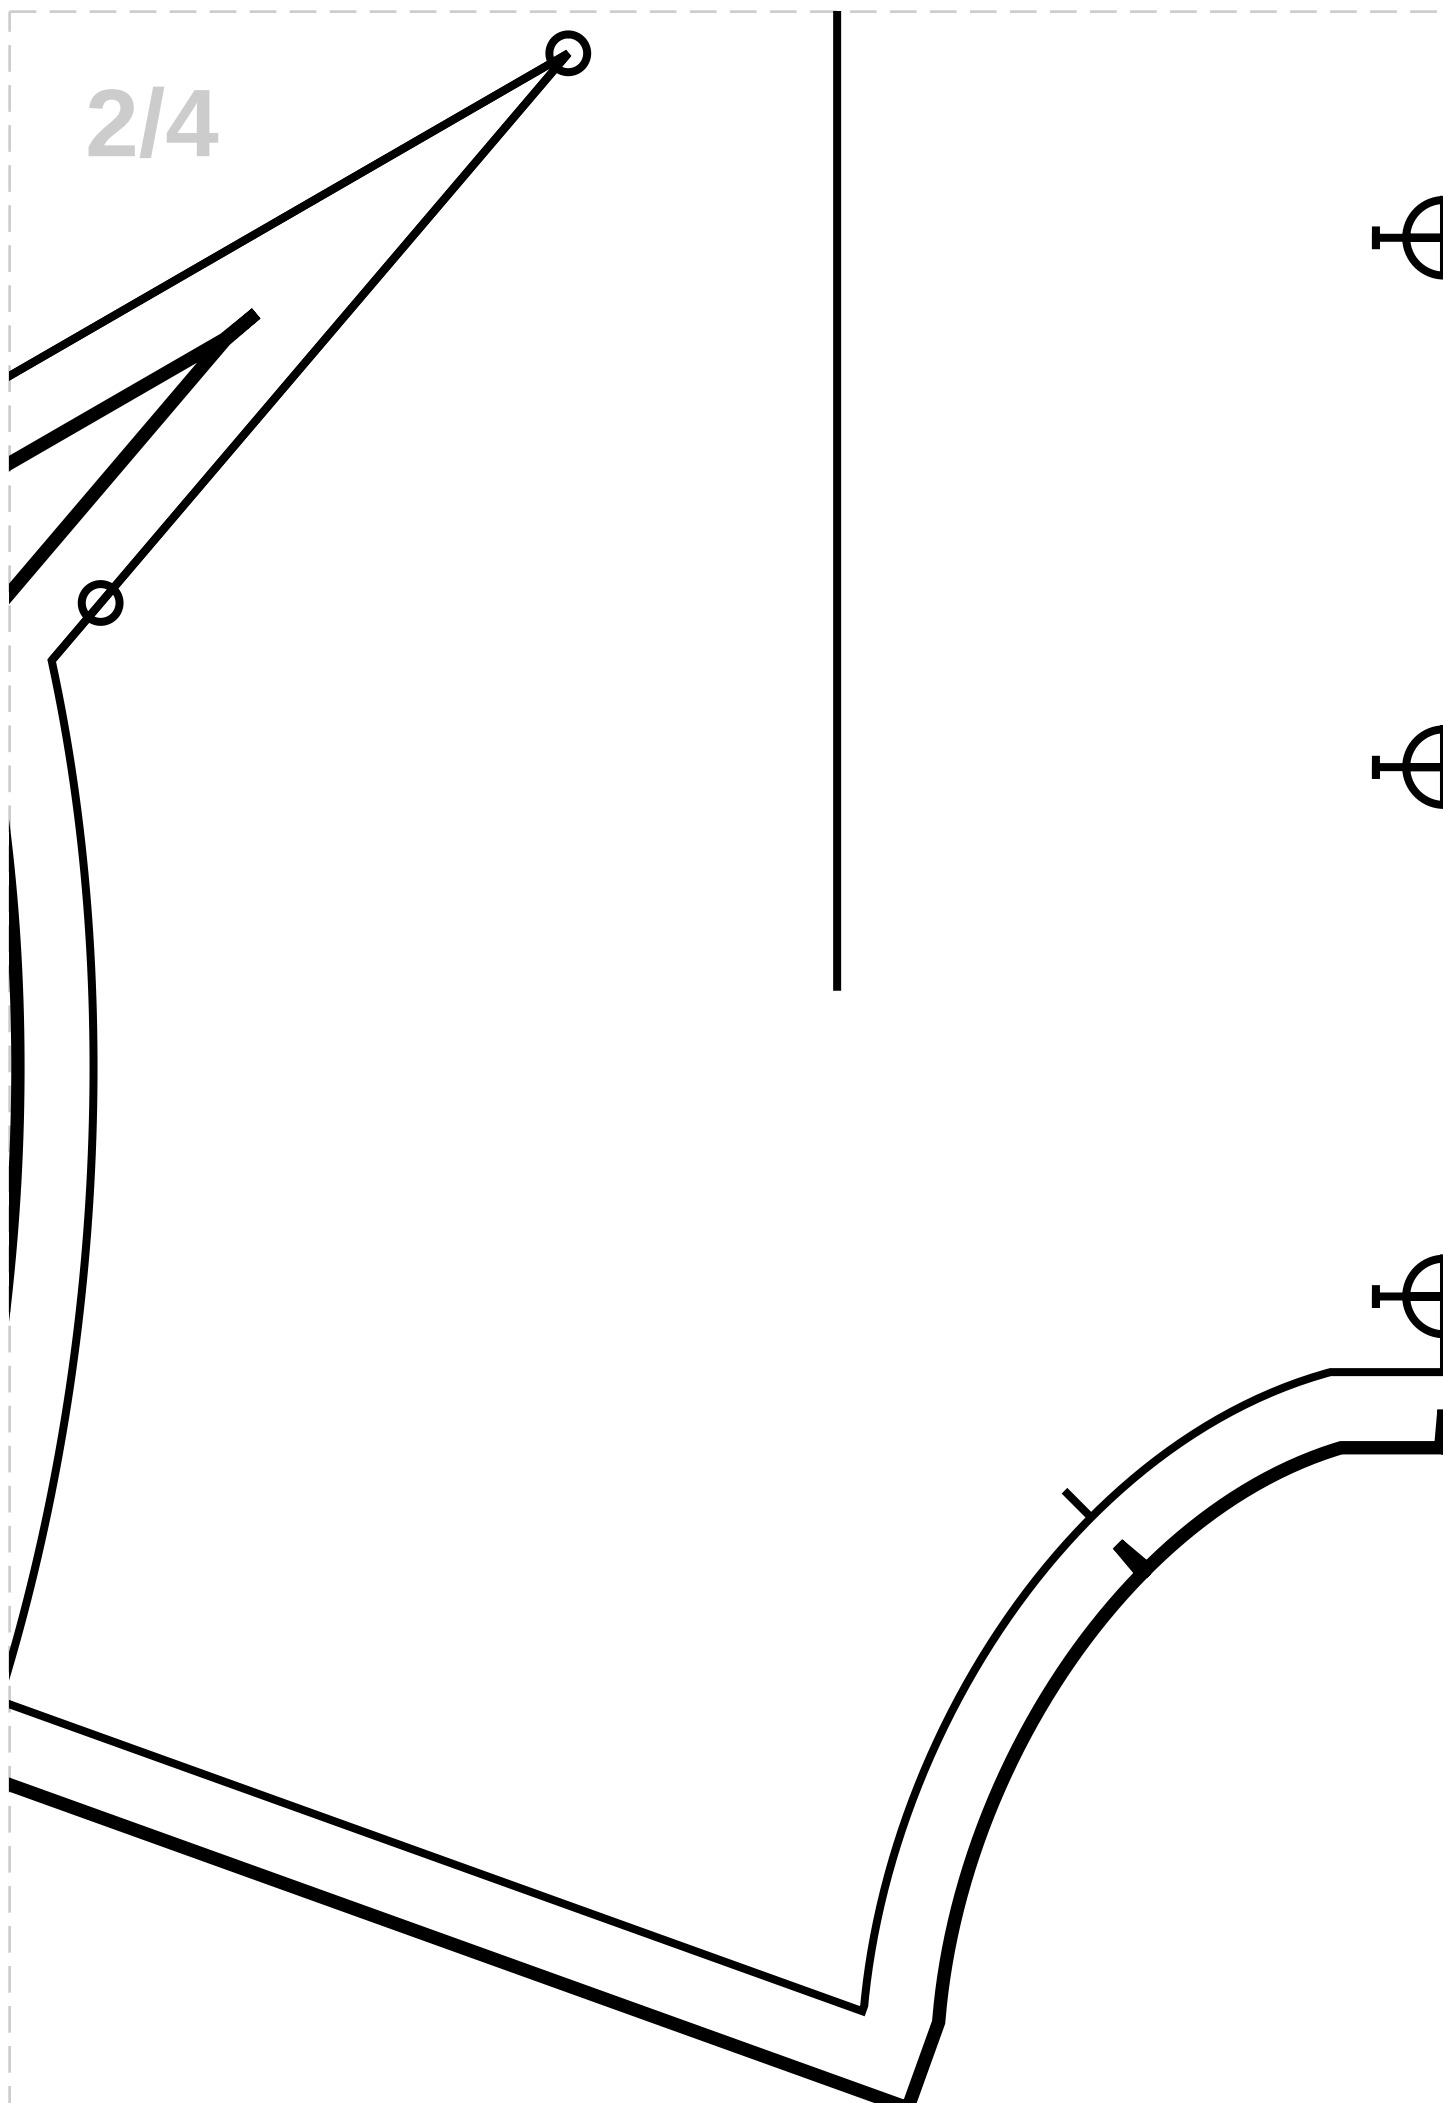

2/5



2/6

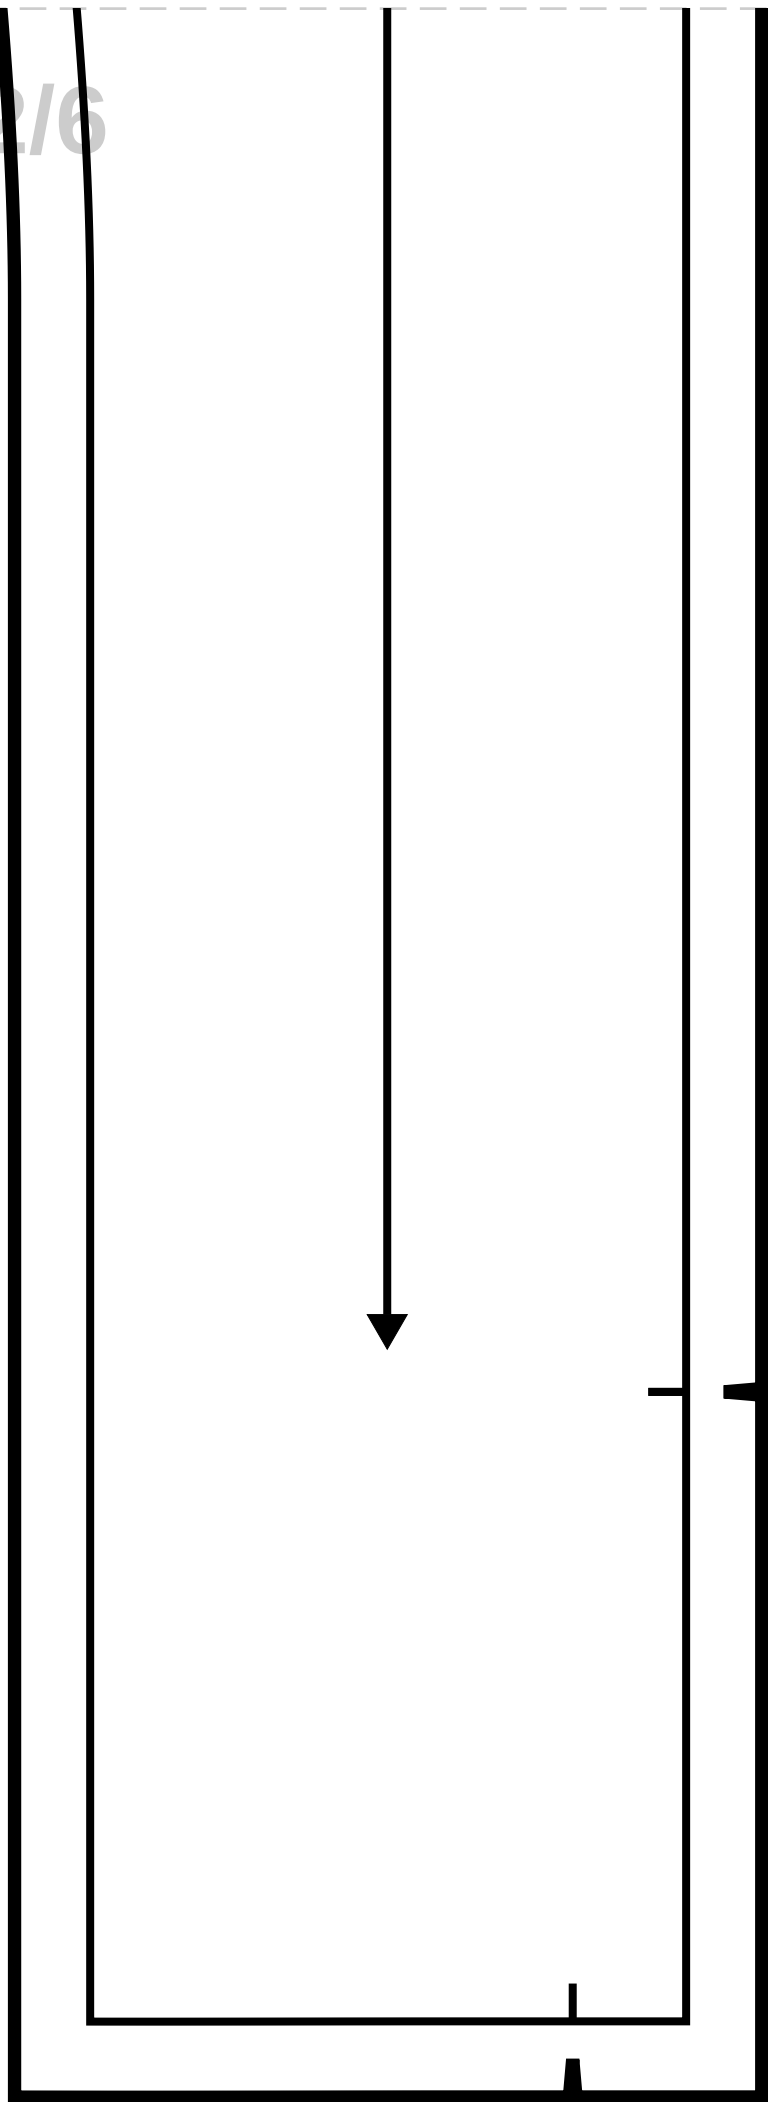

2/8


3


SLEEVE

MAIN FABRIC: Cut 2

EAS

3/1

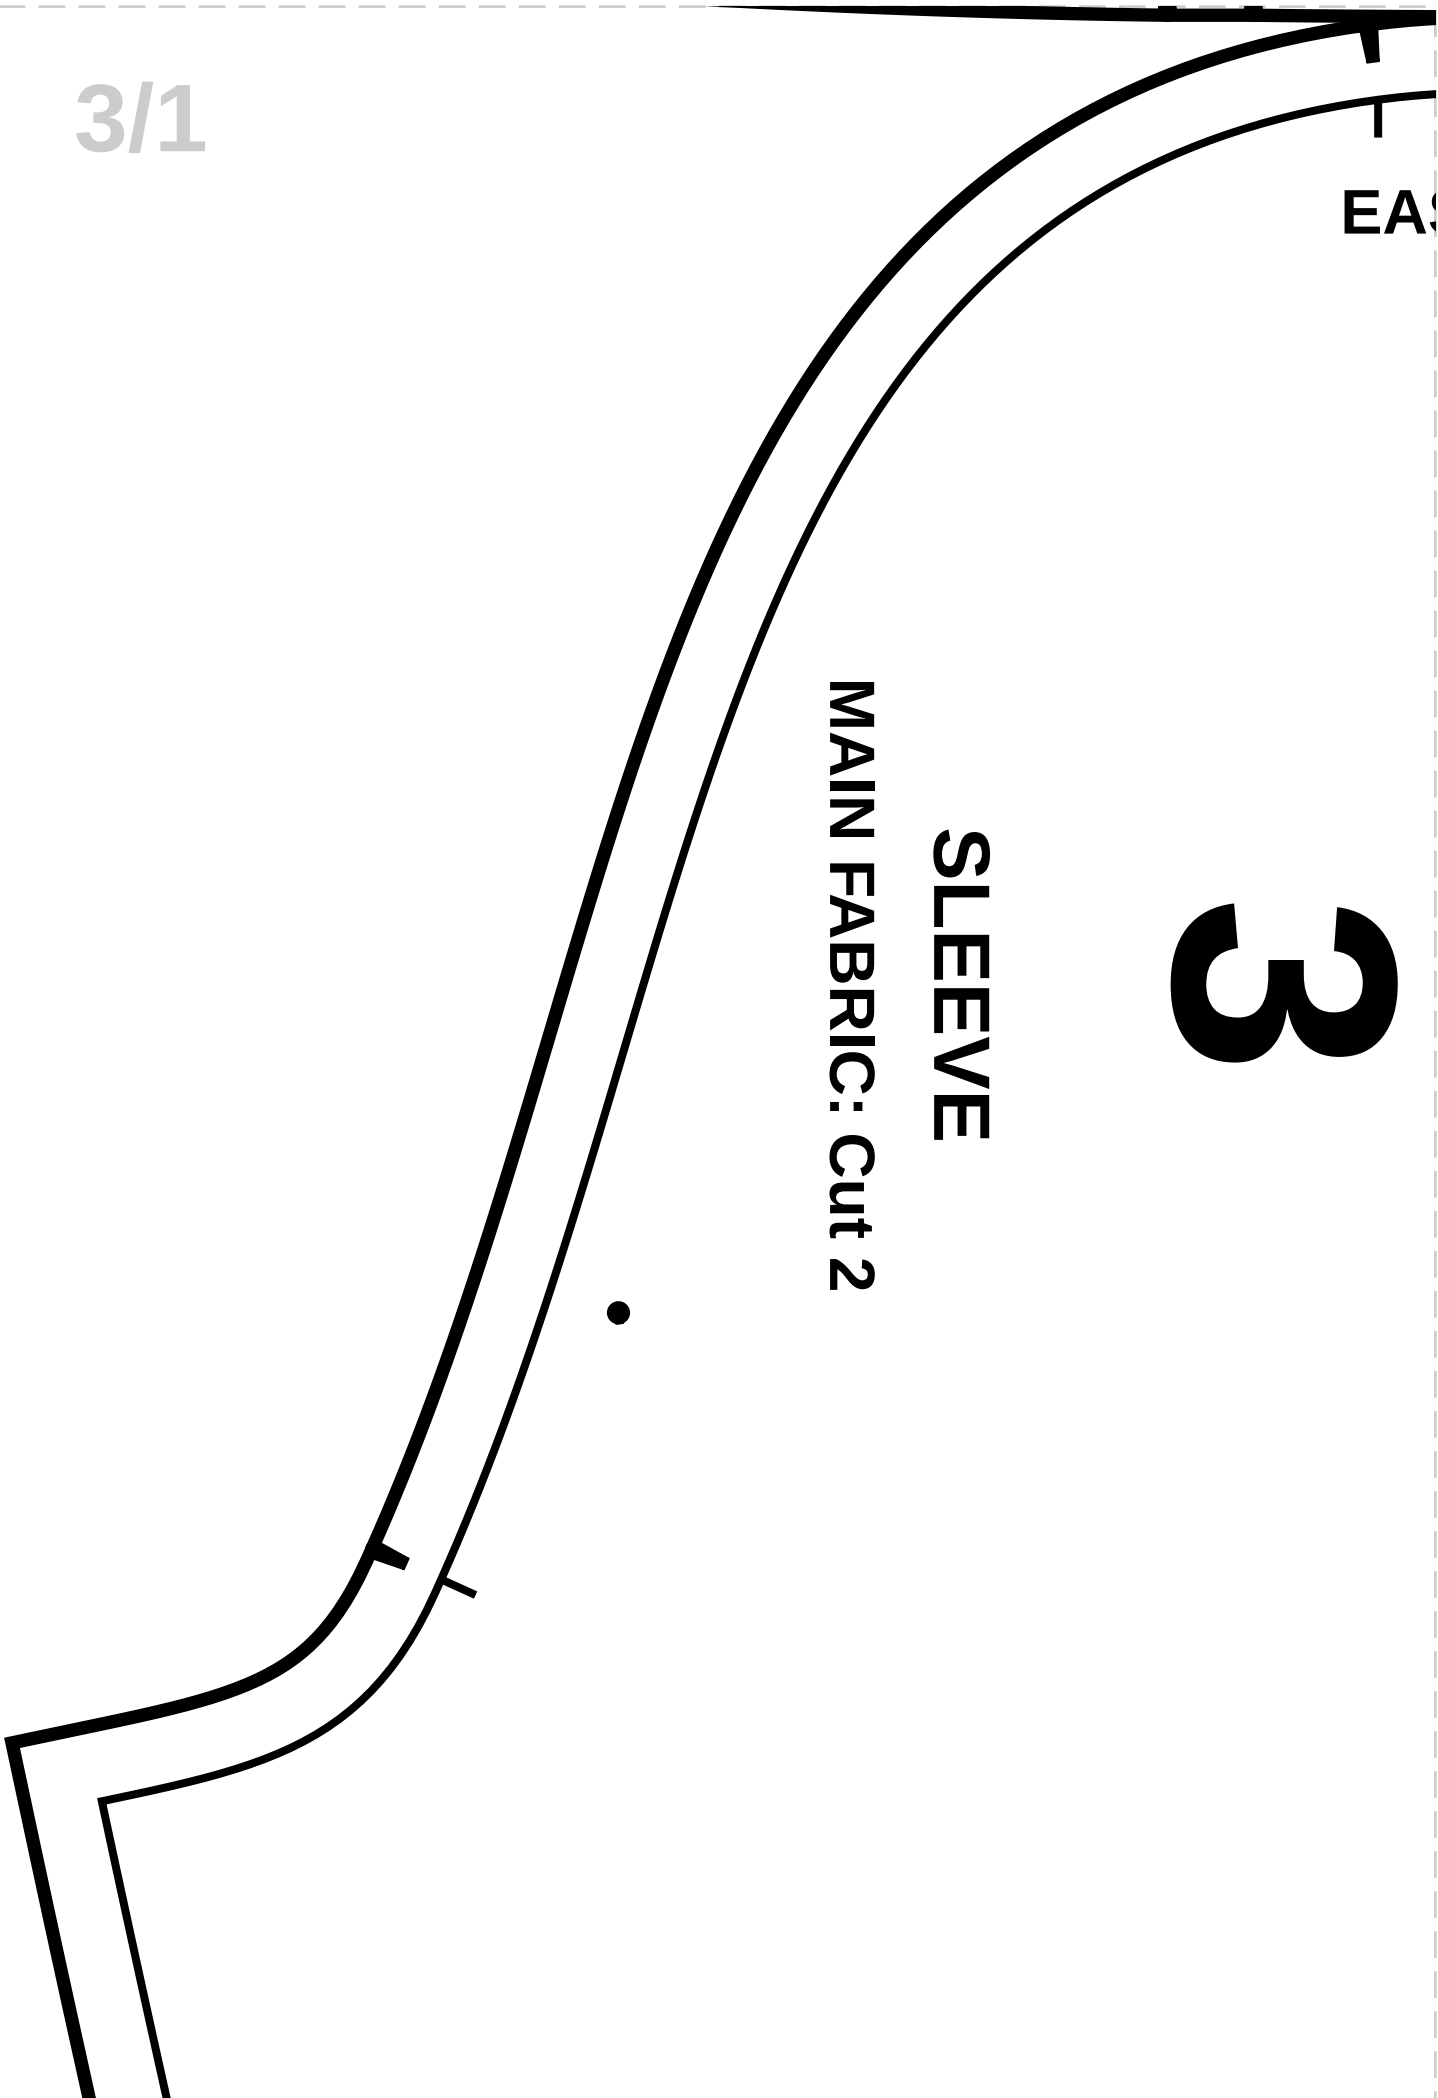

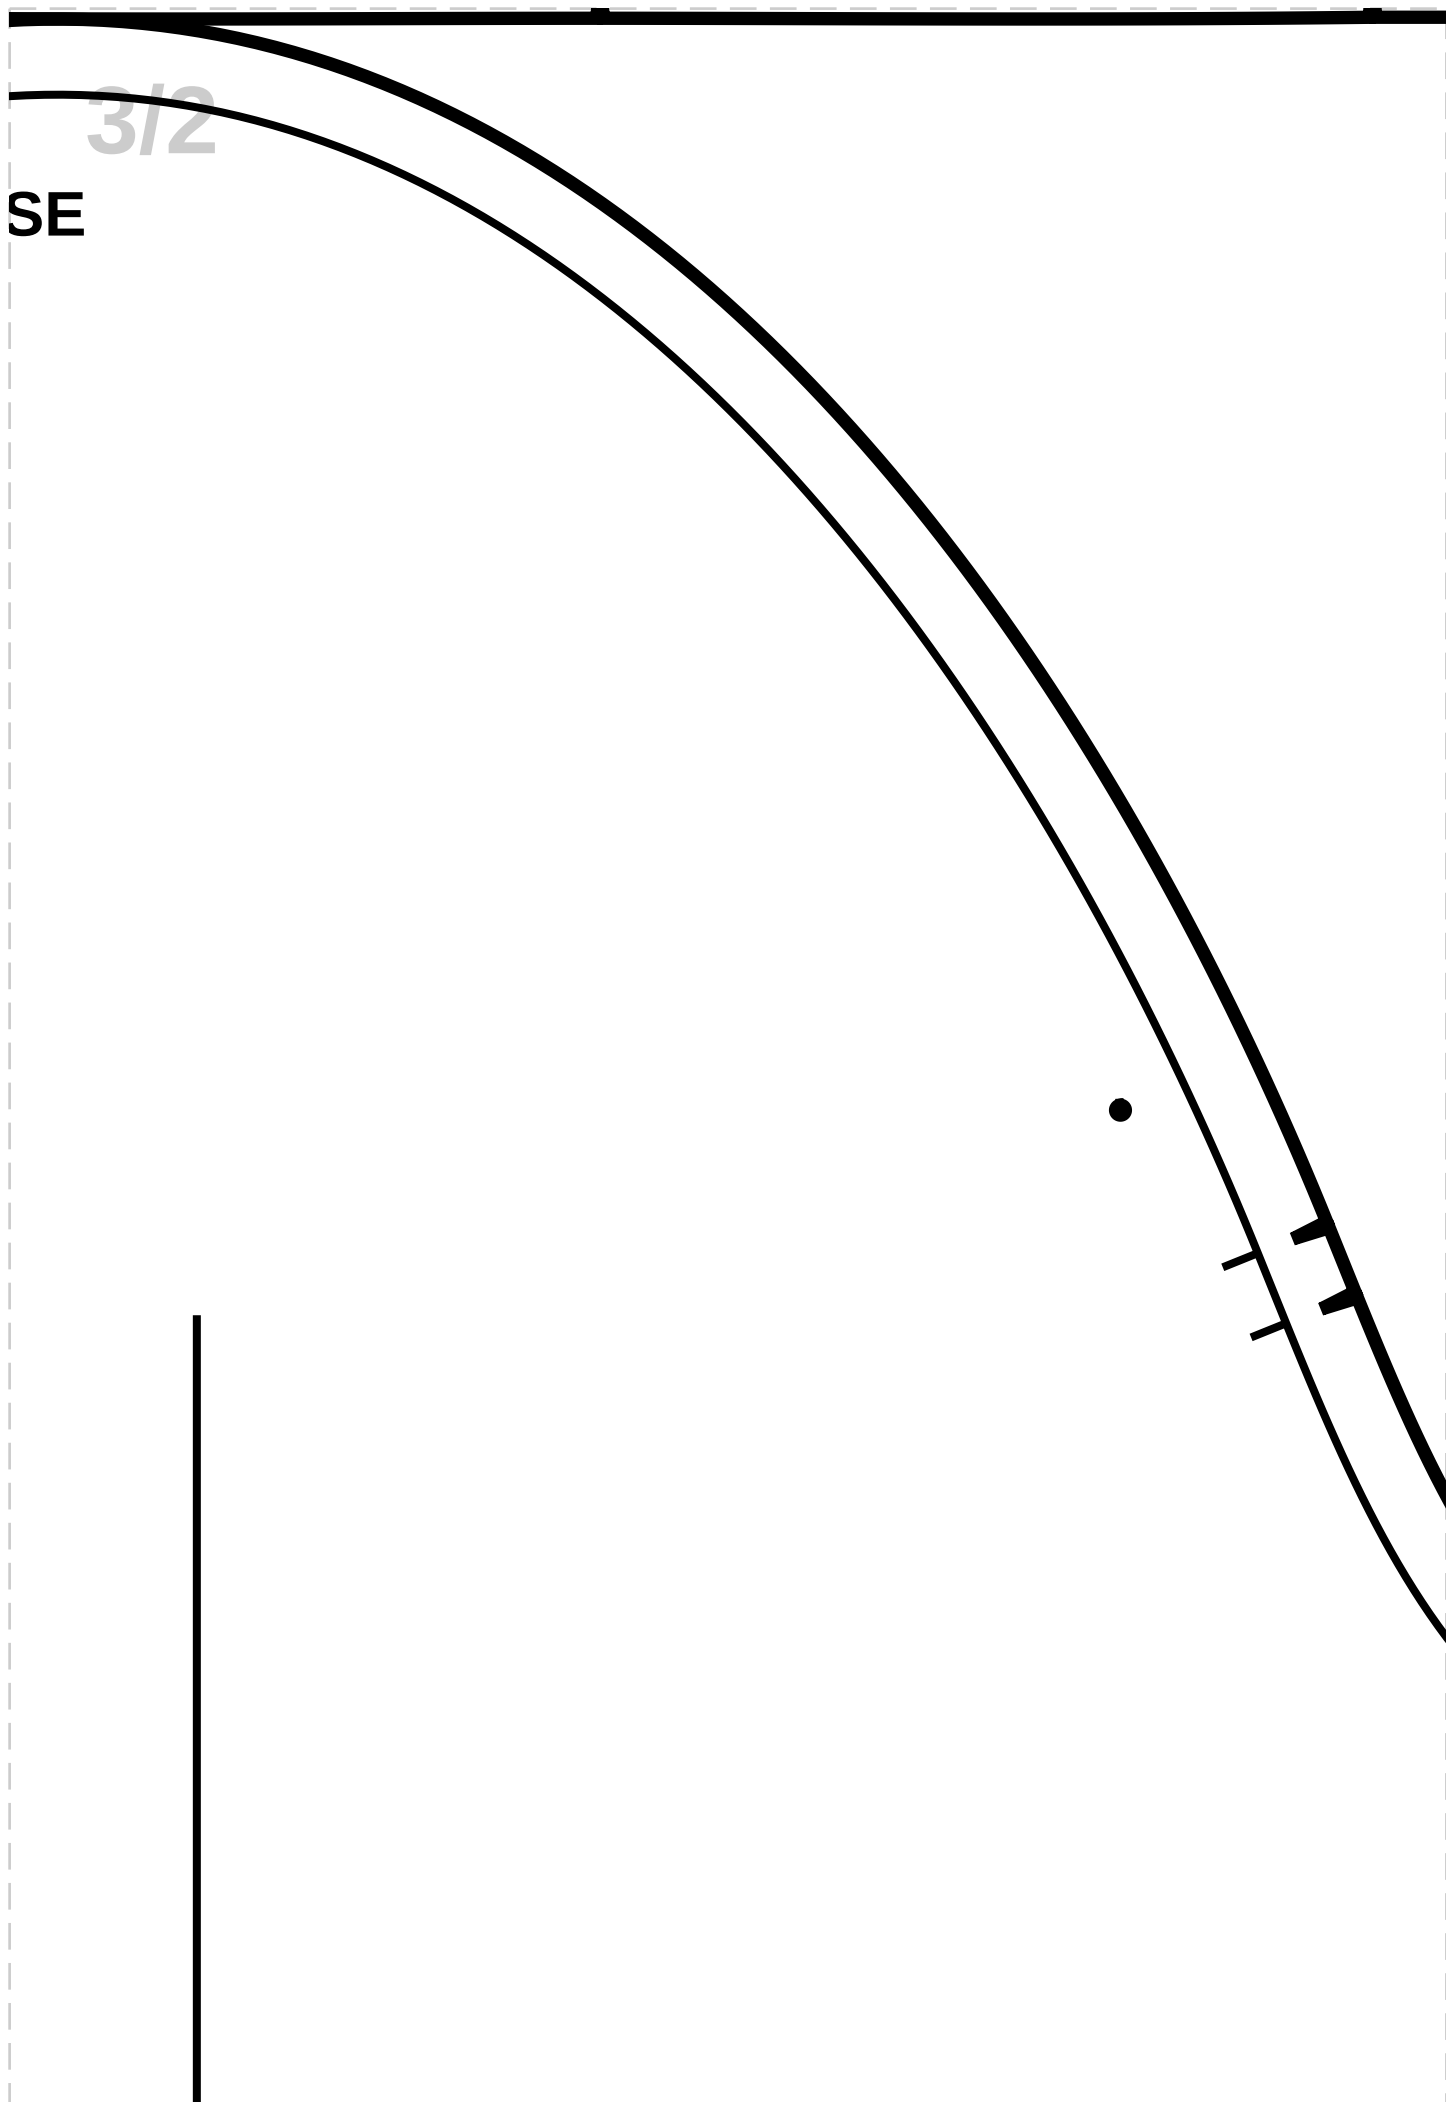

4

FRONT BOTTOM RUFFLE

MAIN FABRIC: Cut 1



5

BACK BOTTOM

MAIN FABRIC:



3/4



GATHER	

[illegible]


3/6

GATHER


3/7




3/8

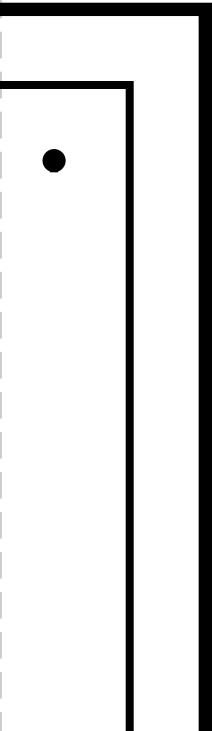

4/1

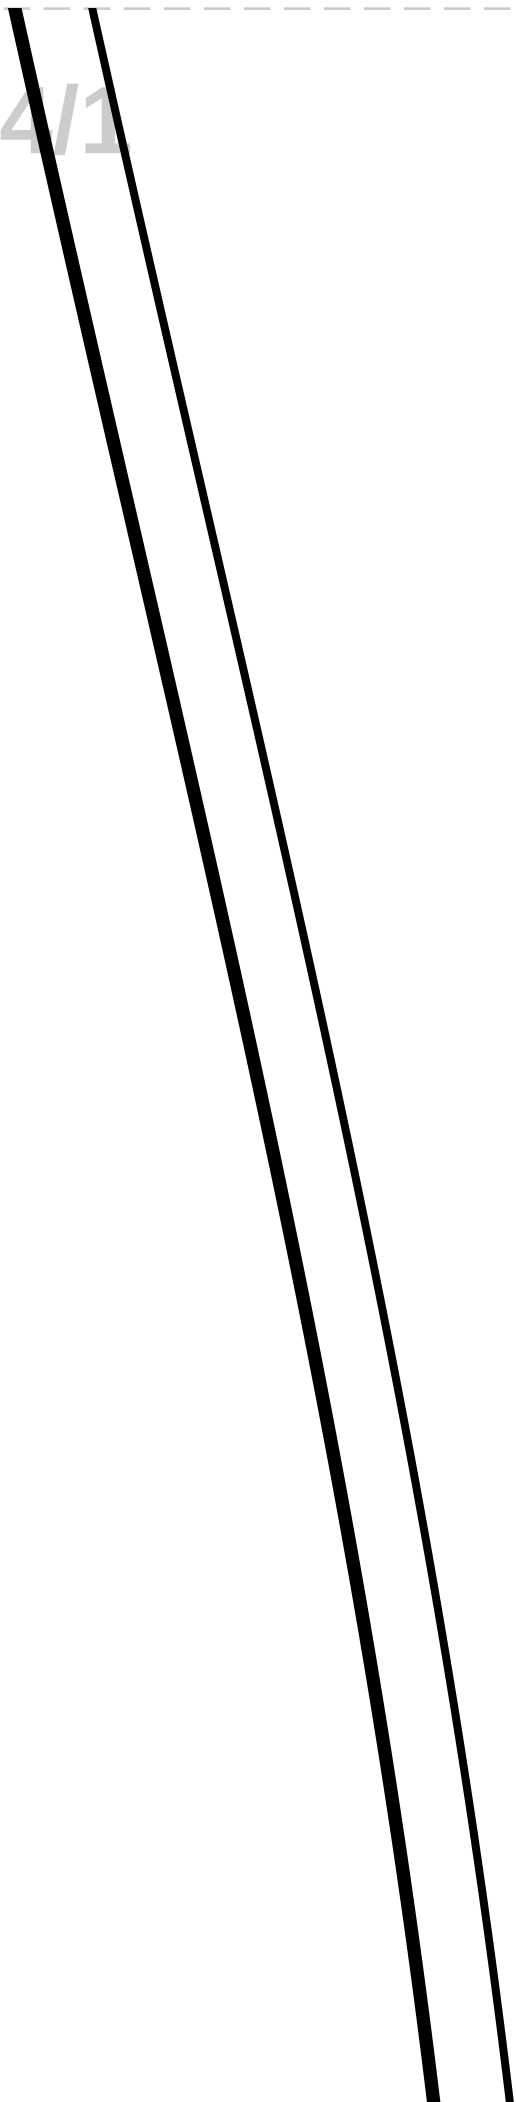


4/2

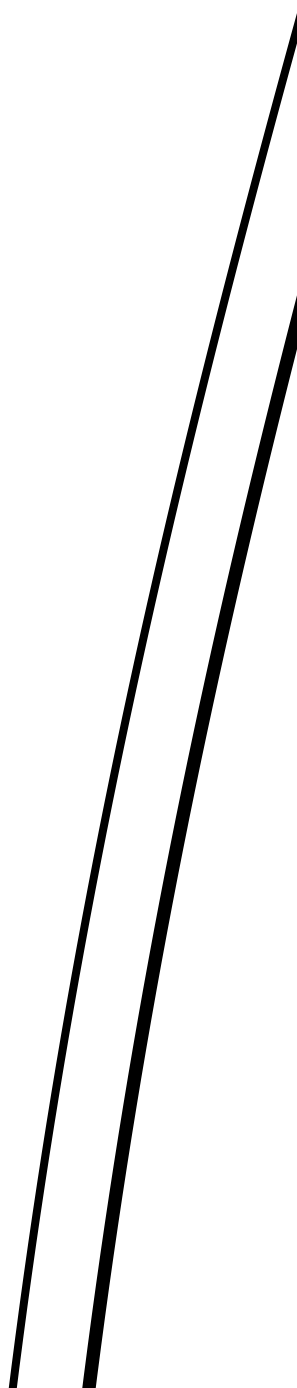

RUFFLE

Cut 1

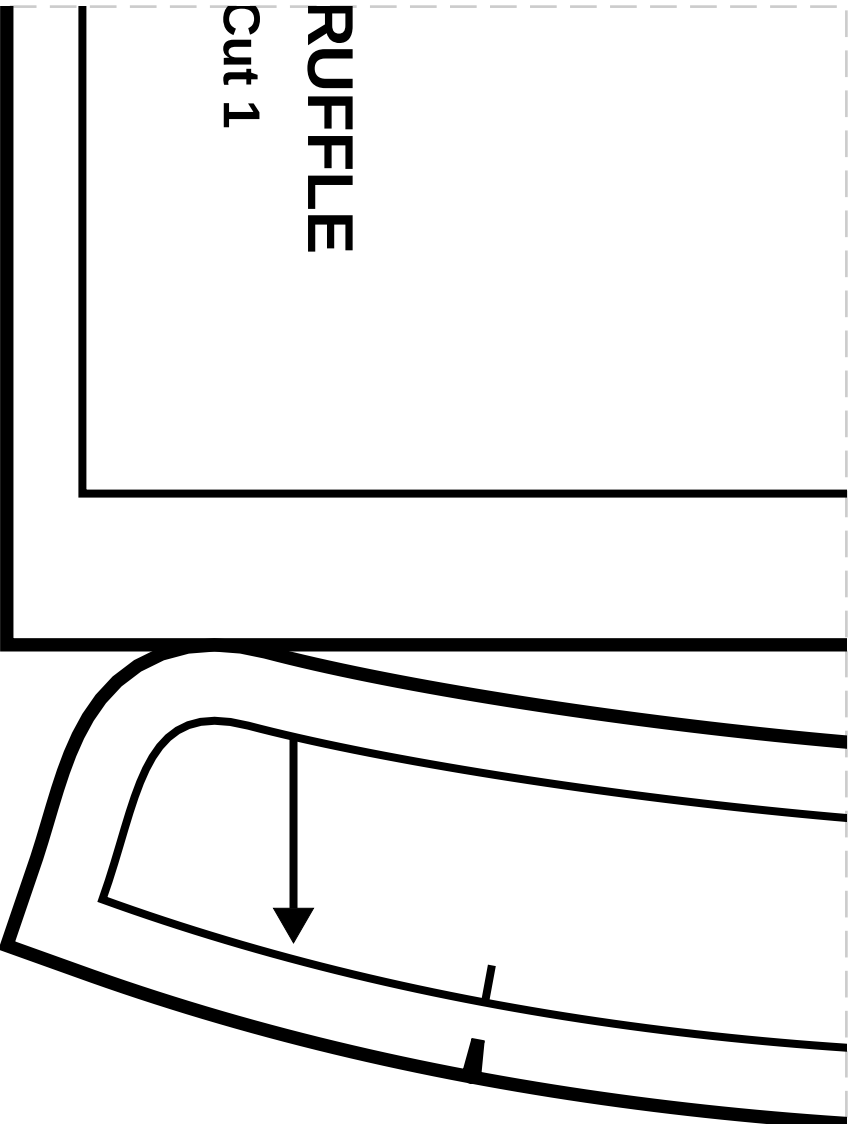

4/3



4/4




FOLD

8

COLLAR STAND
MAIN FABRIC: Cut 2
FUSIBLE INTERFACING: Cut 2


4/5

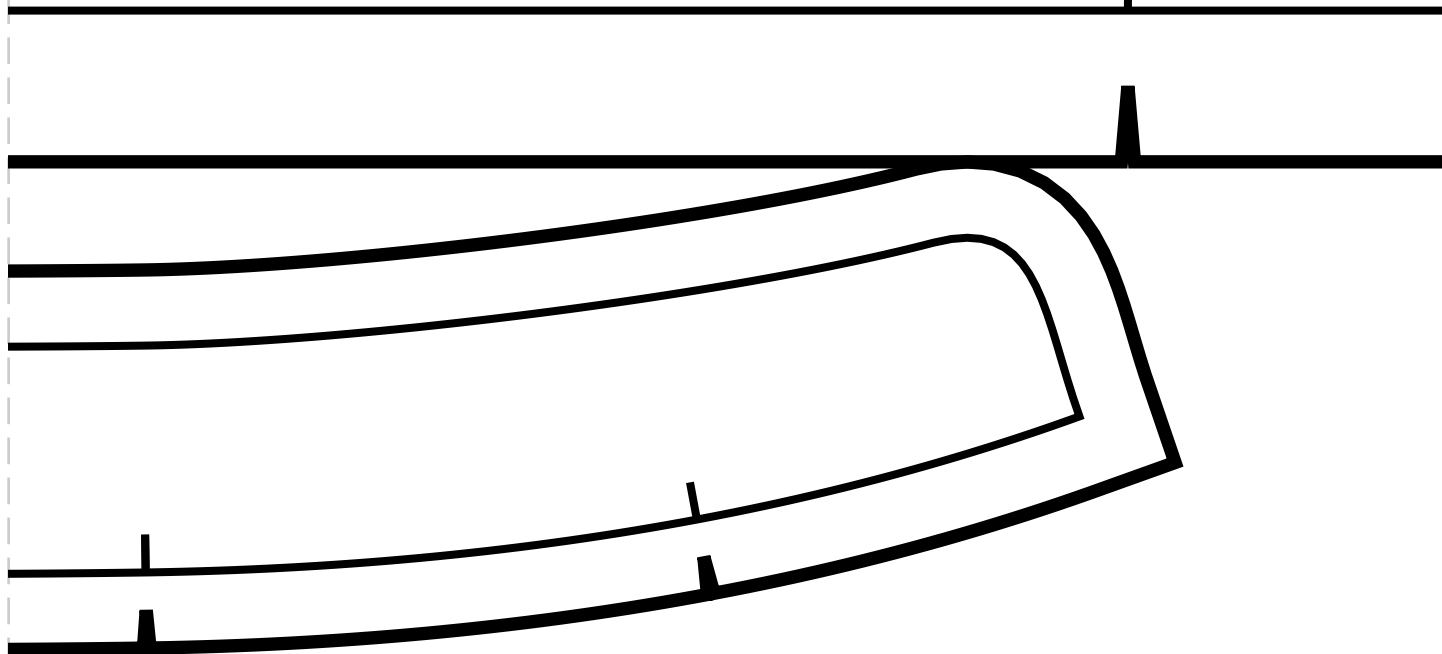

4/6


4/7

4/8

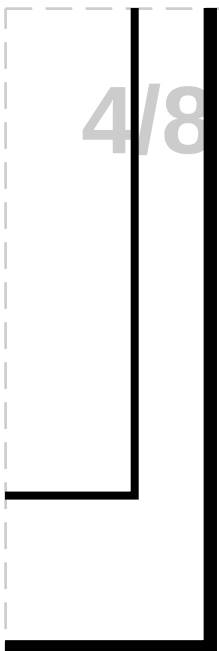

5/1

HEM 3/8"
(1) cm

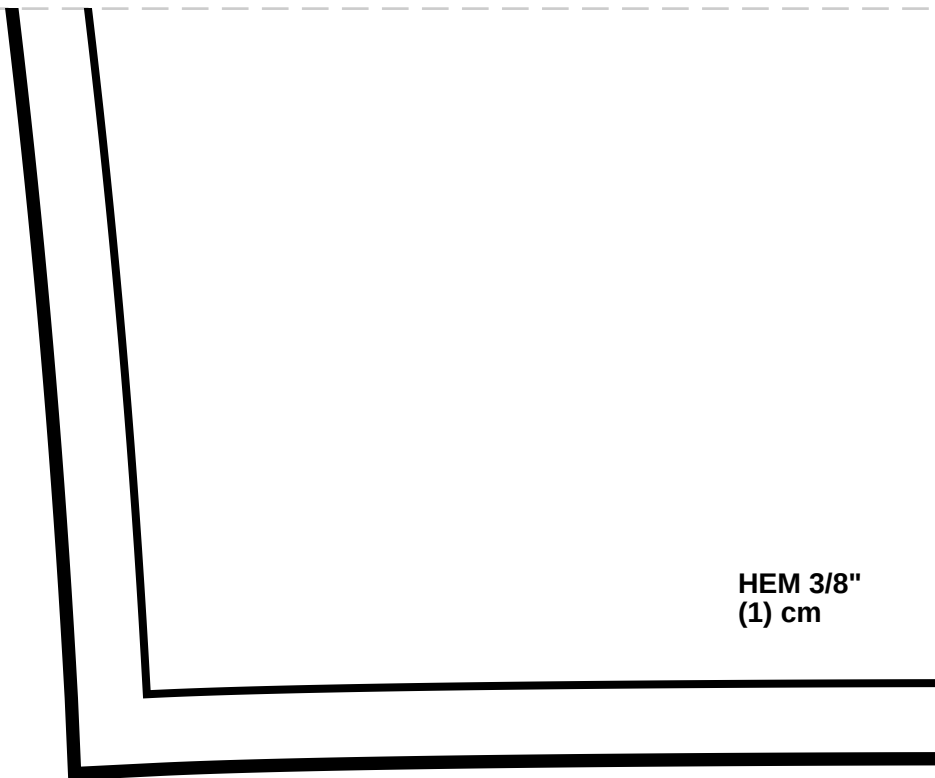

5/2



5/3

5/4

5/5

5/8