

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 99.25, Waist: 82.75, Hips: 106.5

Notes

How to print Printing

Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.



Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 8.79 cm (3 1/2 in)
8. Button diameter 1.00 cm (3/8 in)
9. Front buttons quantity 8.00 pc
10. Across chest 52.40 cm (20 5/8 in)
11. Waist 43.59 cm (17 1/8 in)
12. Hips 58.09 cm (22 7/8 in)
13. Front length from HPS to hem 69.02 cm (27 1/8 in)
14. Center front length to hem 60.41 cm (23 3/4 in)
15. Center back length to hem 65.10 cm (25 5/8 in)
16. Across front 37.94 cm (14 7/8 in)
17. Across back 35.83 cm (14 1/8 in)
18. Across shoulders 41.22 cm (16 1/4 in)
19. Side seam 38.86 cm (15 1/4 in)
20. Hemline sweep 57.41 cm (22 5/8 in)
21. Armhole length front 24.47 cm (9 5/8 in)
22. Armhole length back 28.49 cm (11 1/4 in)
23. Neck opening 15.63 cm (6 1/8 in)
24. Neckline length 44.20 cm (17 3/8 in)
25. Back neck drop 3.67 cm (1 1/2 in)

- 26. Shoulder width 12.47 cm (4 7/8 in)
- 27. Bust dart to bust dart 24.84 cm (9 3/4 in)
- 28. Sleeve length 58.17 cm (22 7/8 in)
- 29. Sleeve upper arm width 35.62 cm (14 in)
- 30. Sleeve opening 25.18 cm (9 7/8 in)
- 31. Sleeve cap length 54.23 none (21 3/8 in)
- 32. Stand height 3.00 cm (1 1/8 in)
- 33. Collar length 44.20 cm (17 3/8 in)

1
FRONT
MAIN FABRIC: Cut 2


2
BACK
MAIN FABRIC: Cut 1


3
SLEEVE
MAIN FABRIC: Cut 2


4
FRONT NECK FACING
FUSIBLE INTERFACING: Cut 2


EASE

1/1

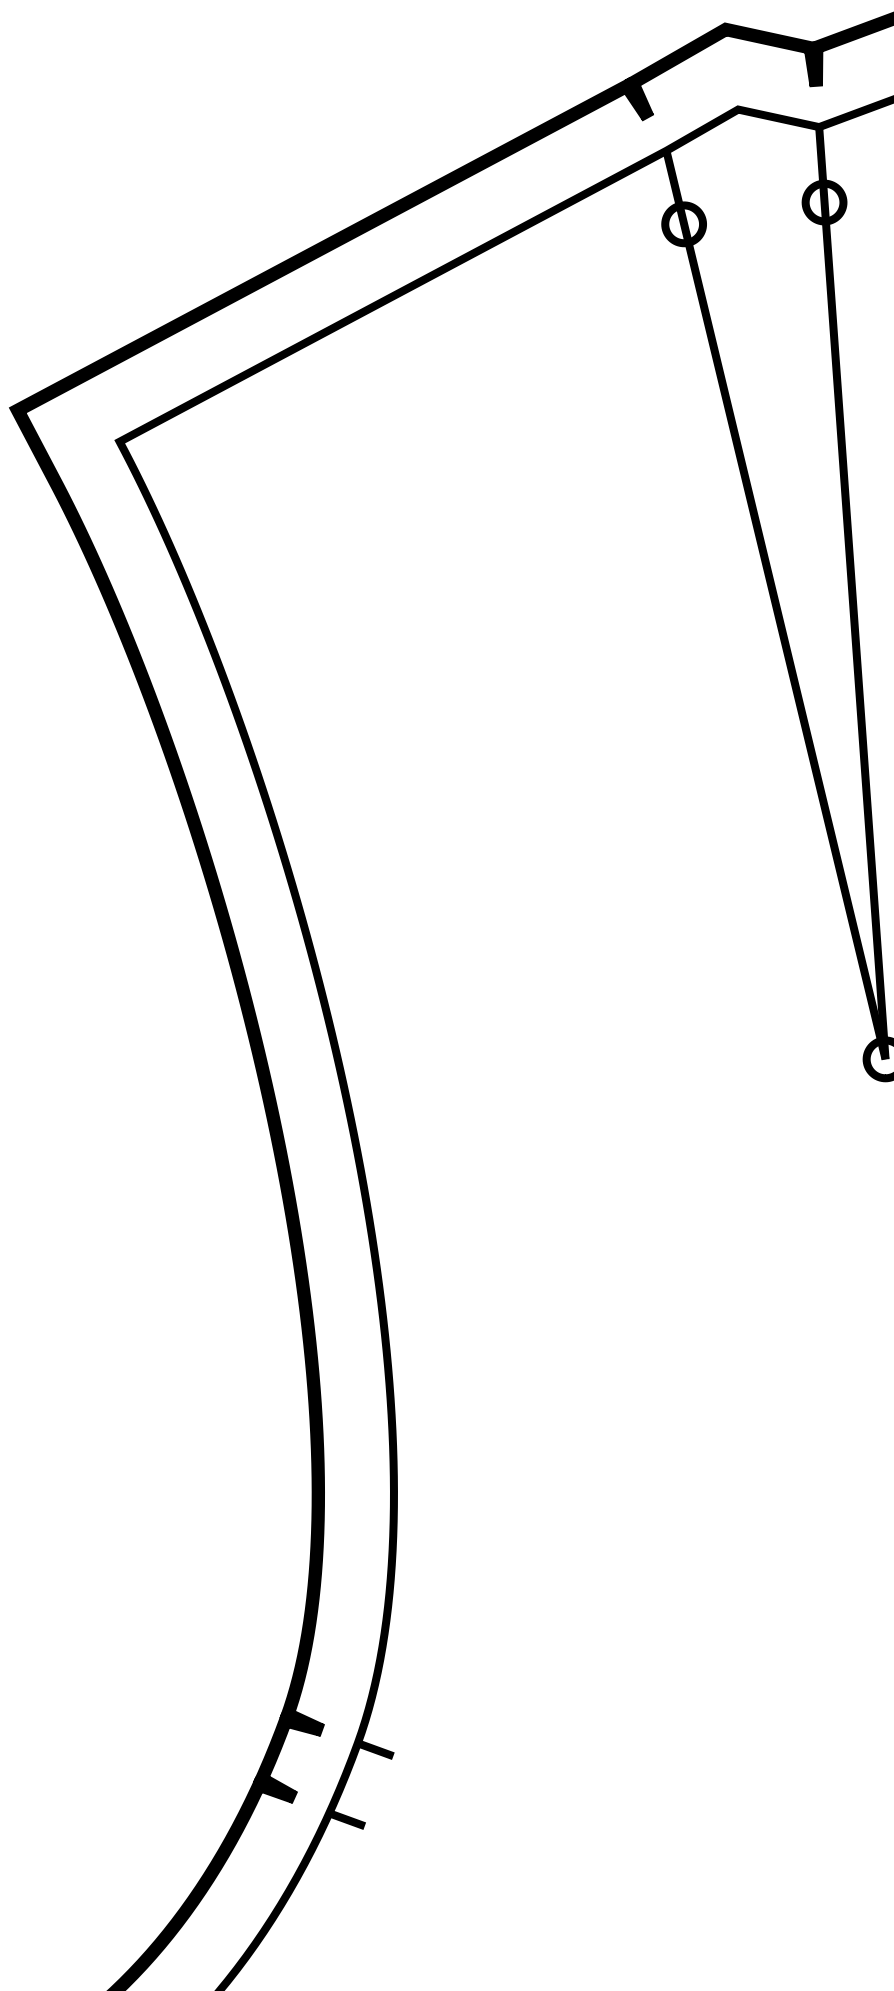

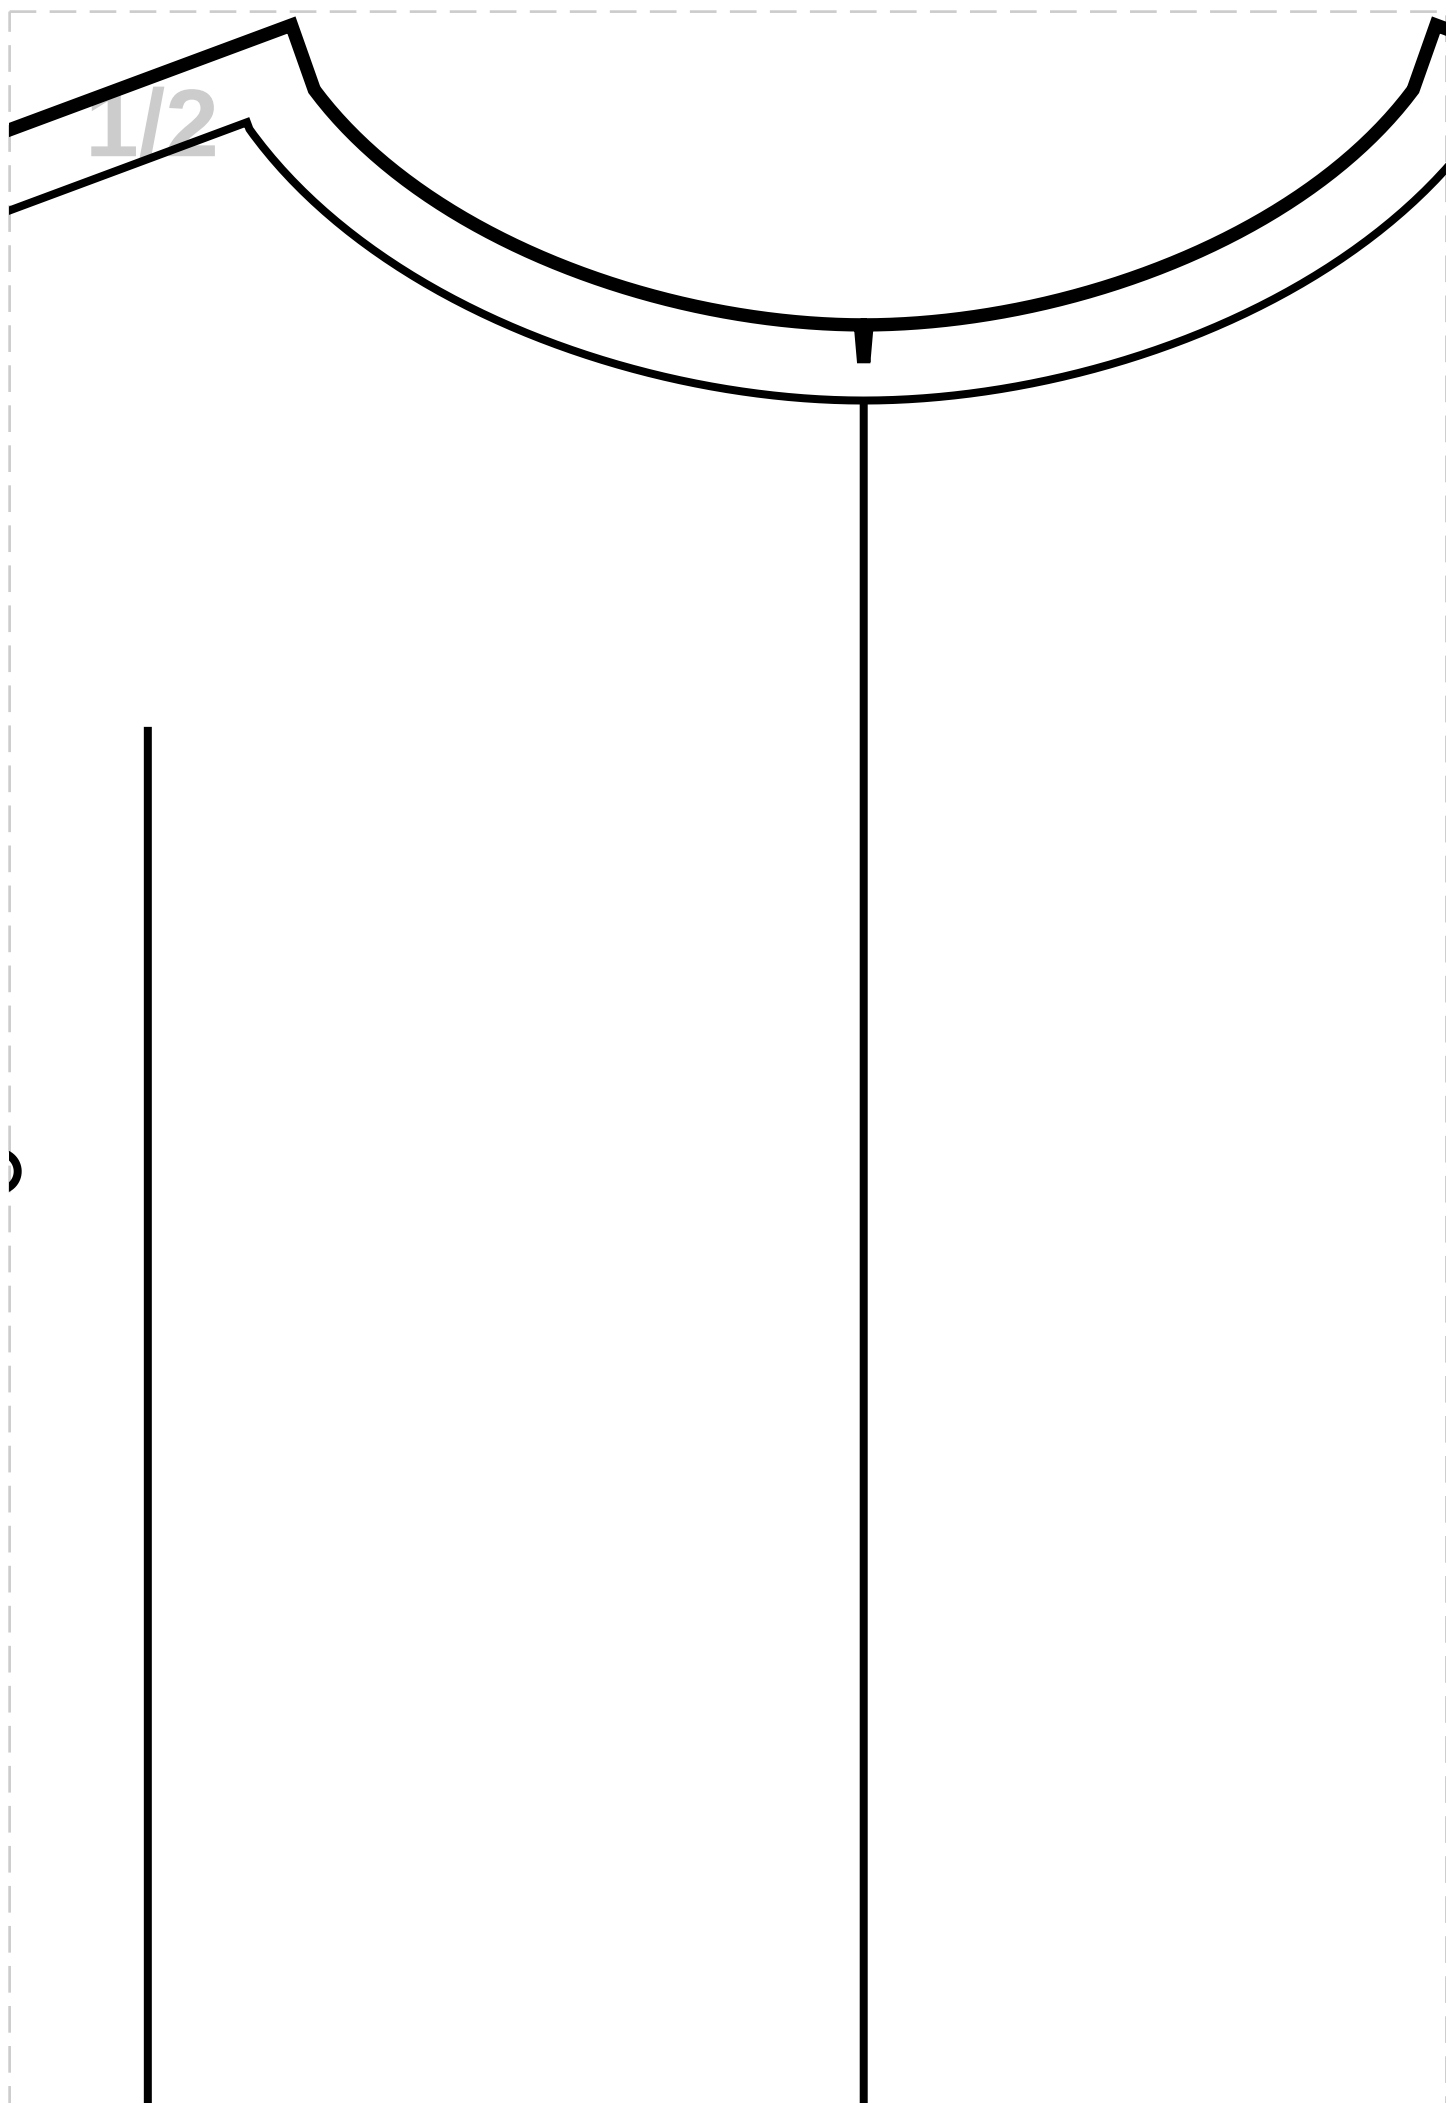

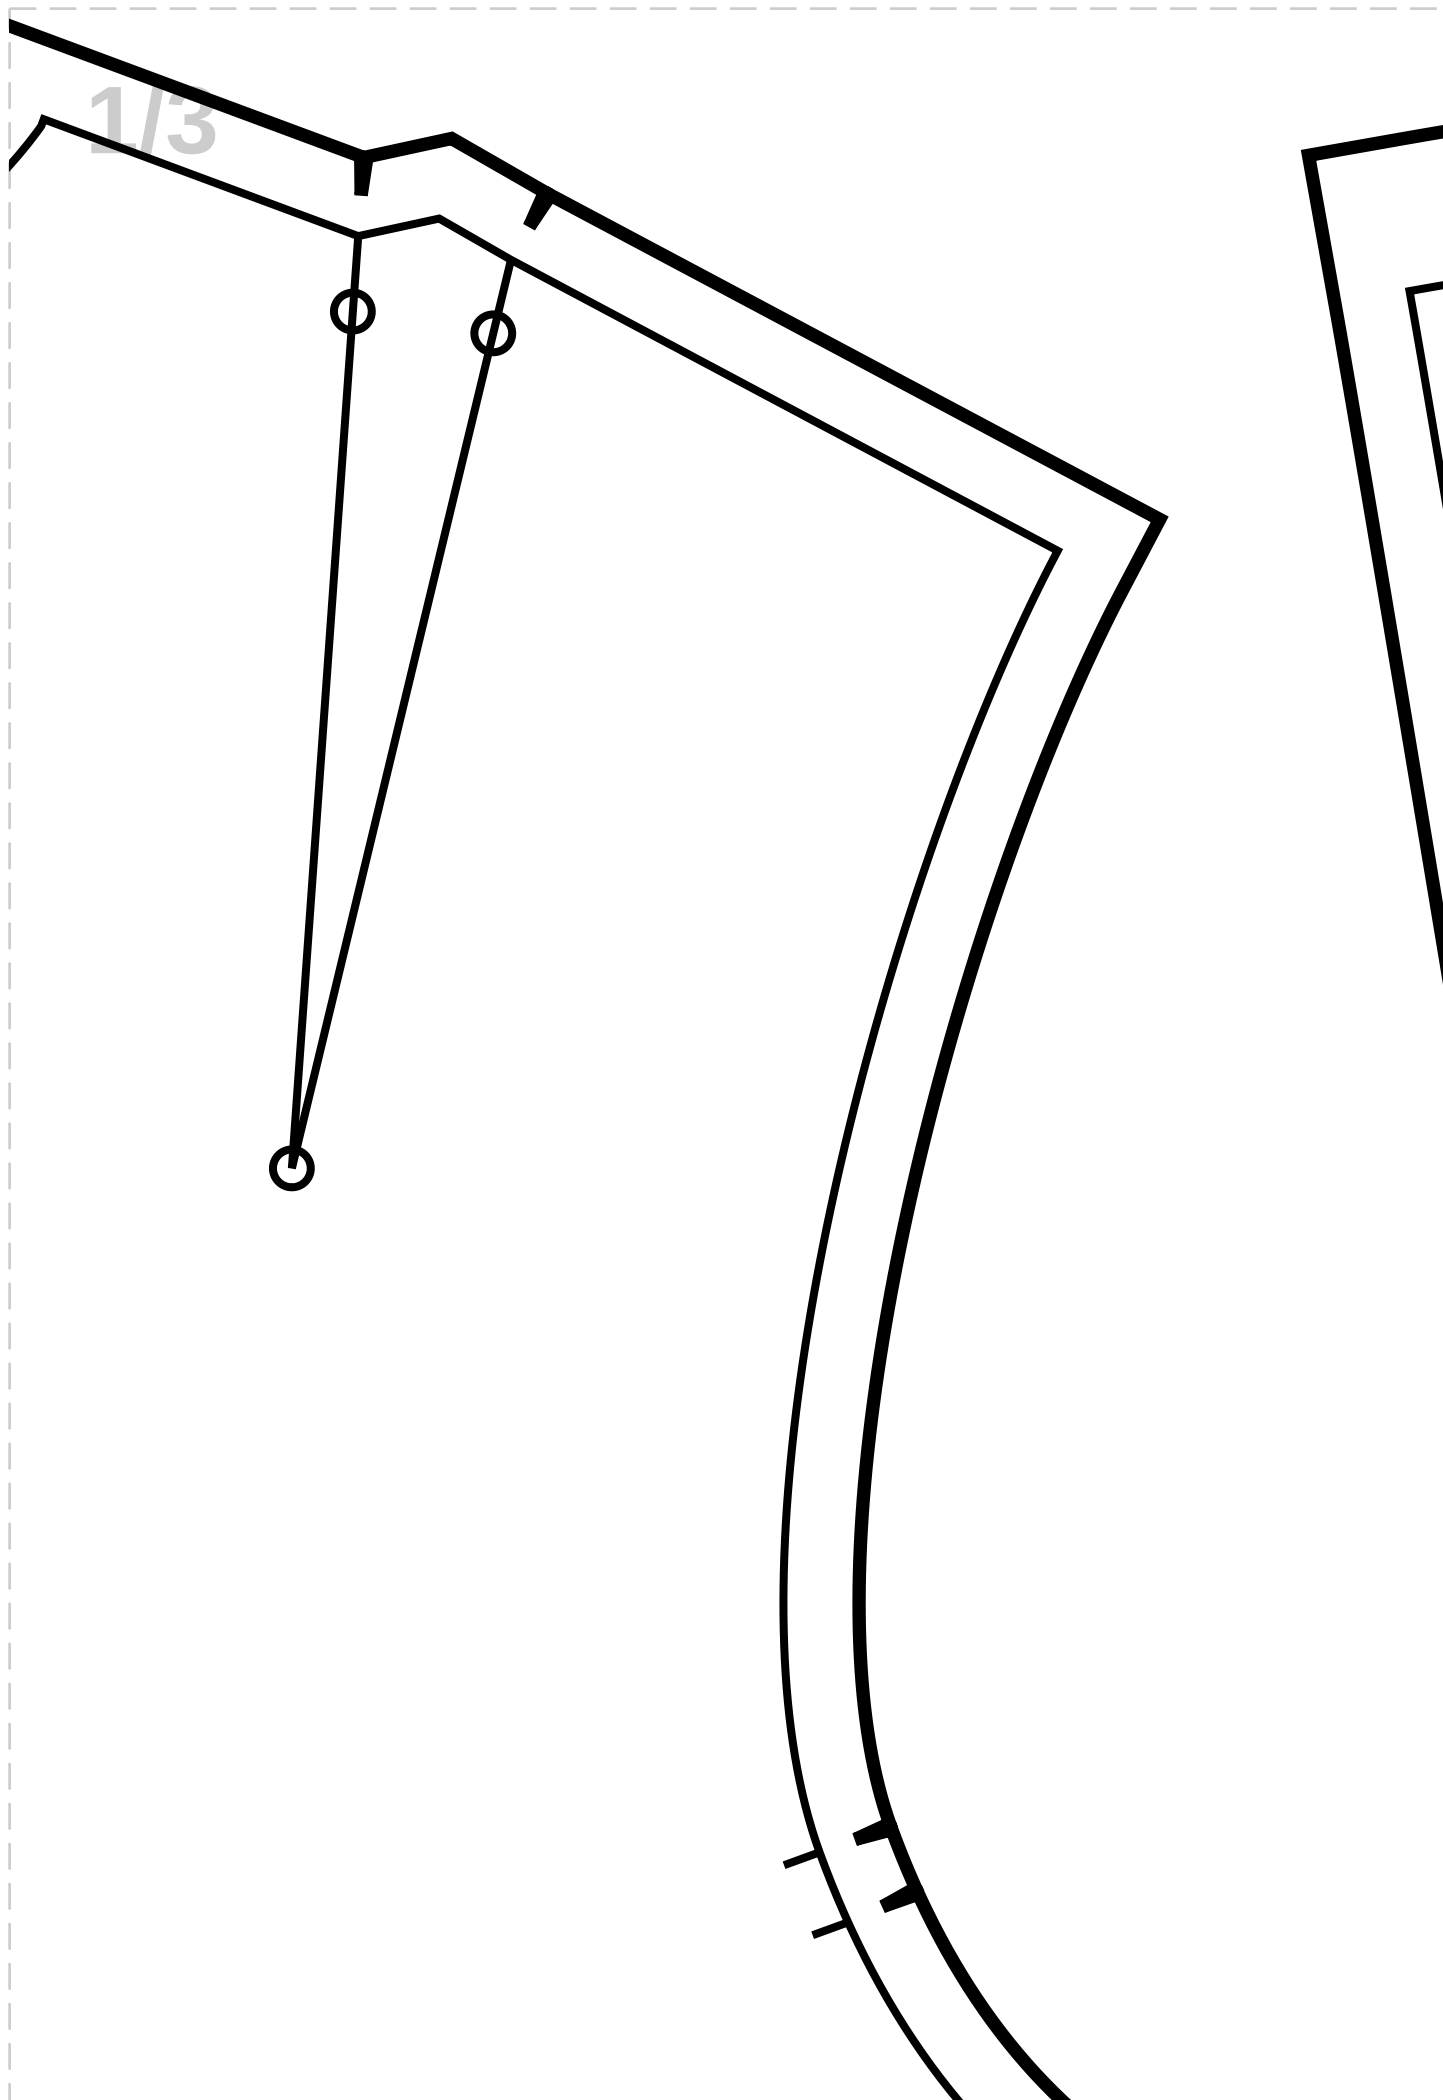

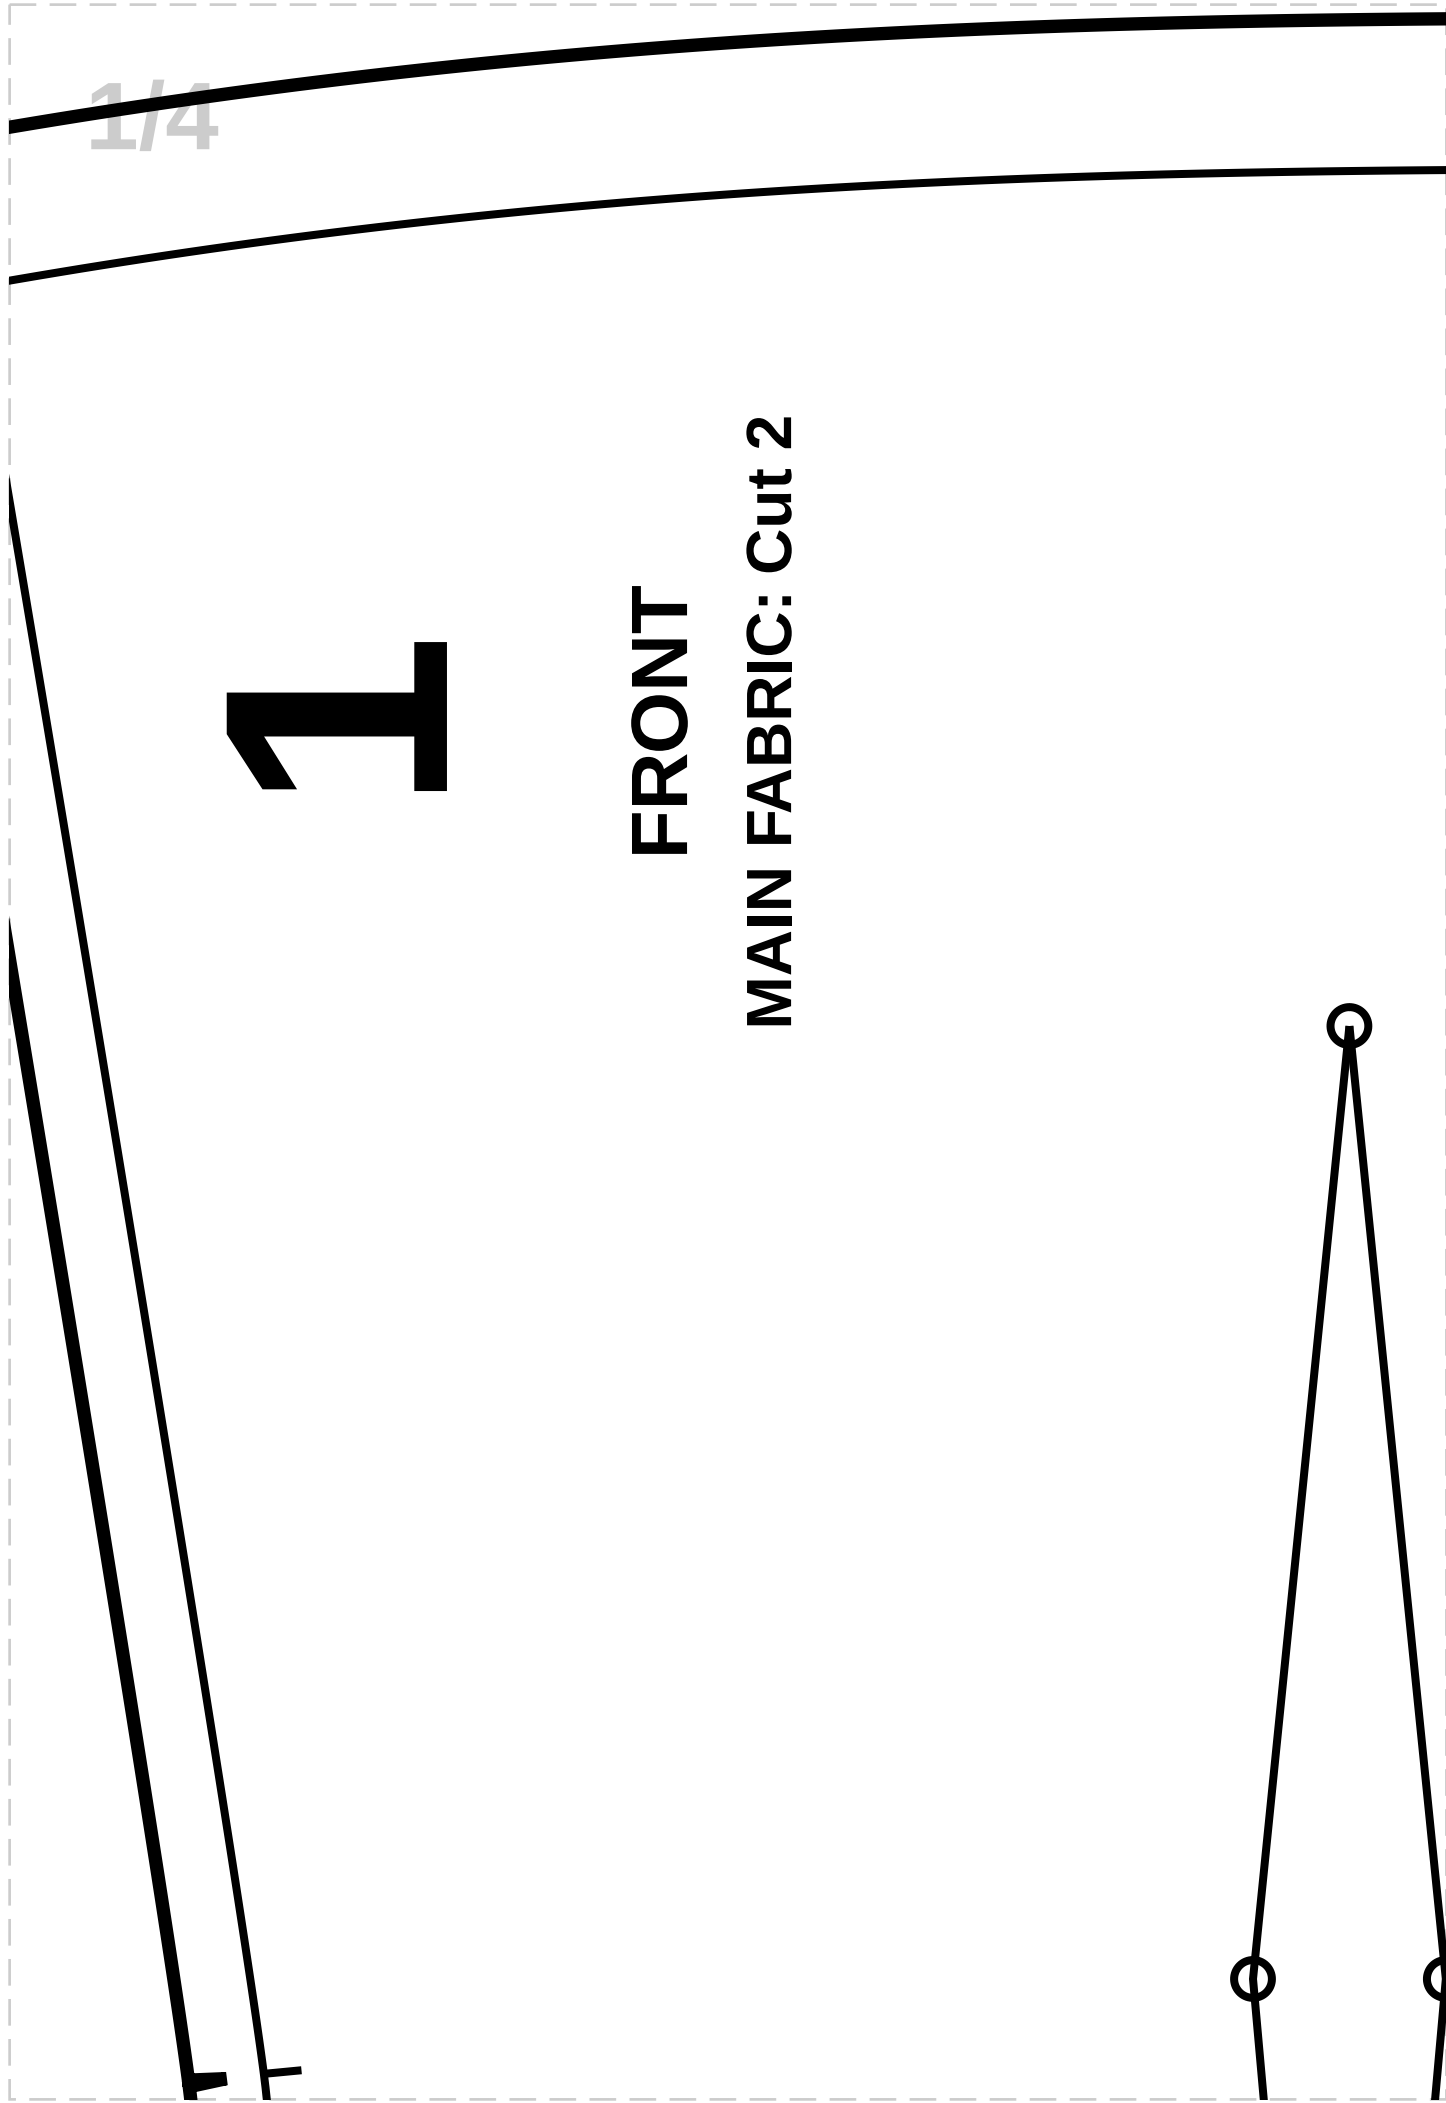


1/4

1

FRONT

MAIN FABRIC: Cut 2

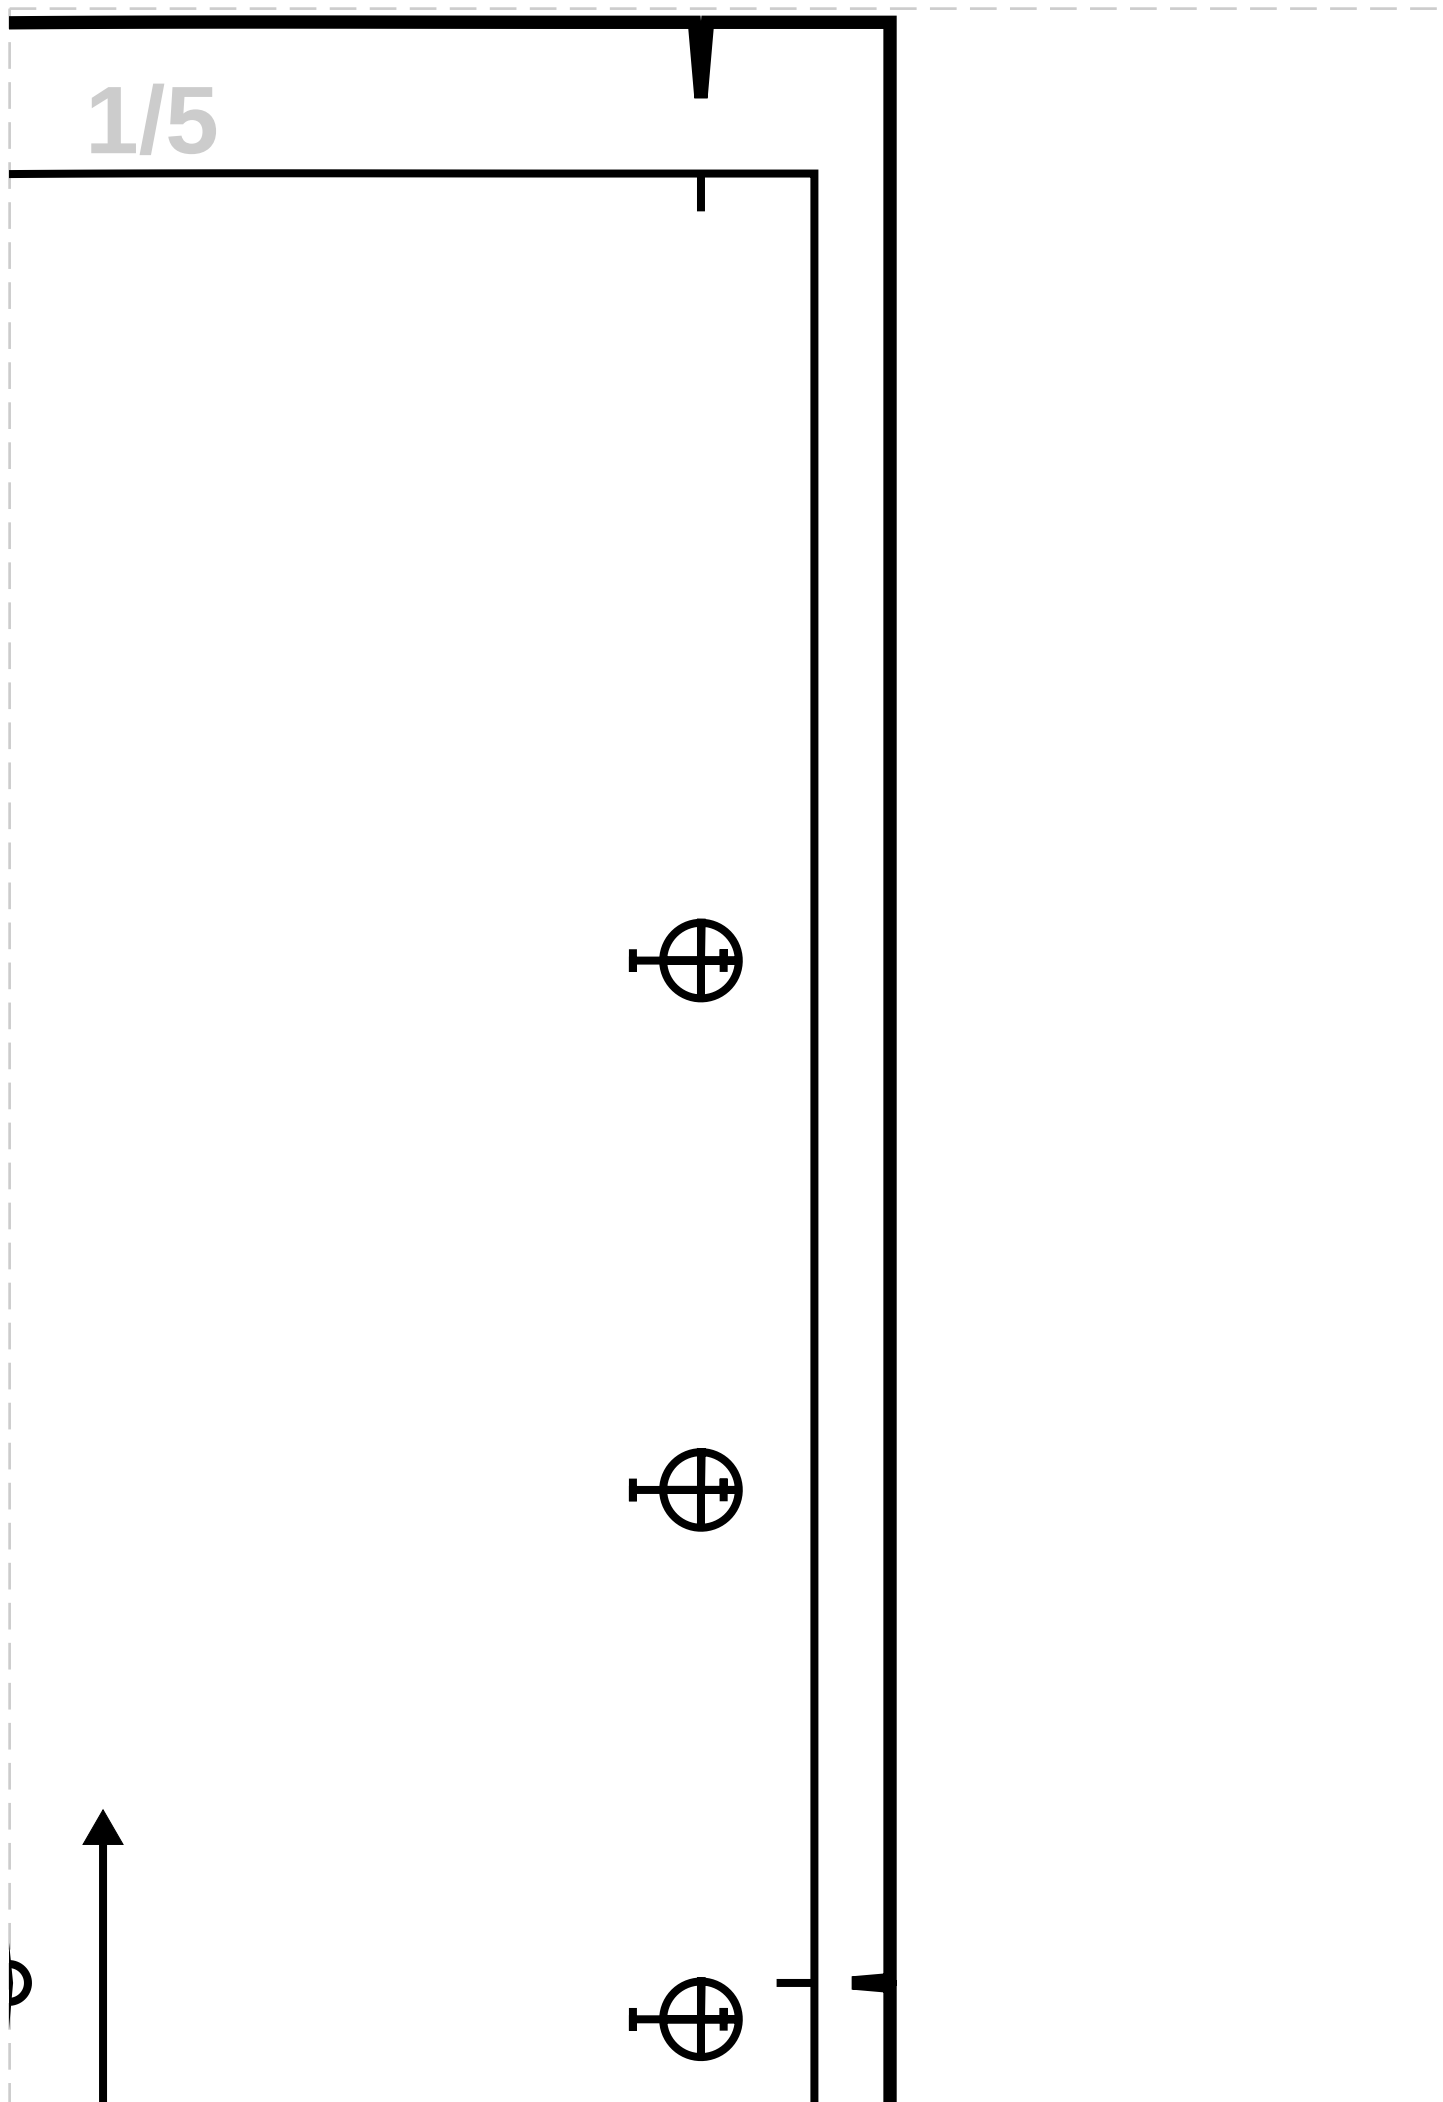


2

BACK


MAIN FABRIC: Cut 1

2/1




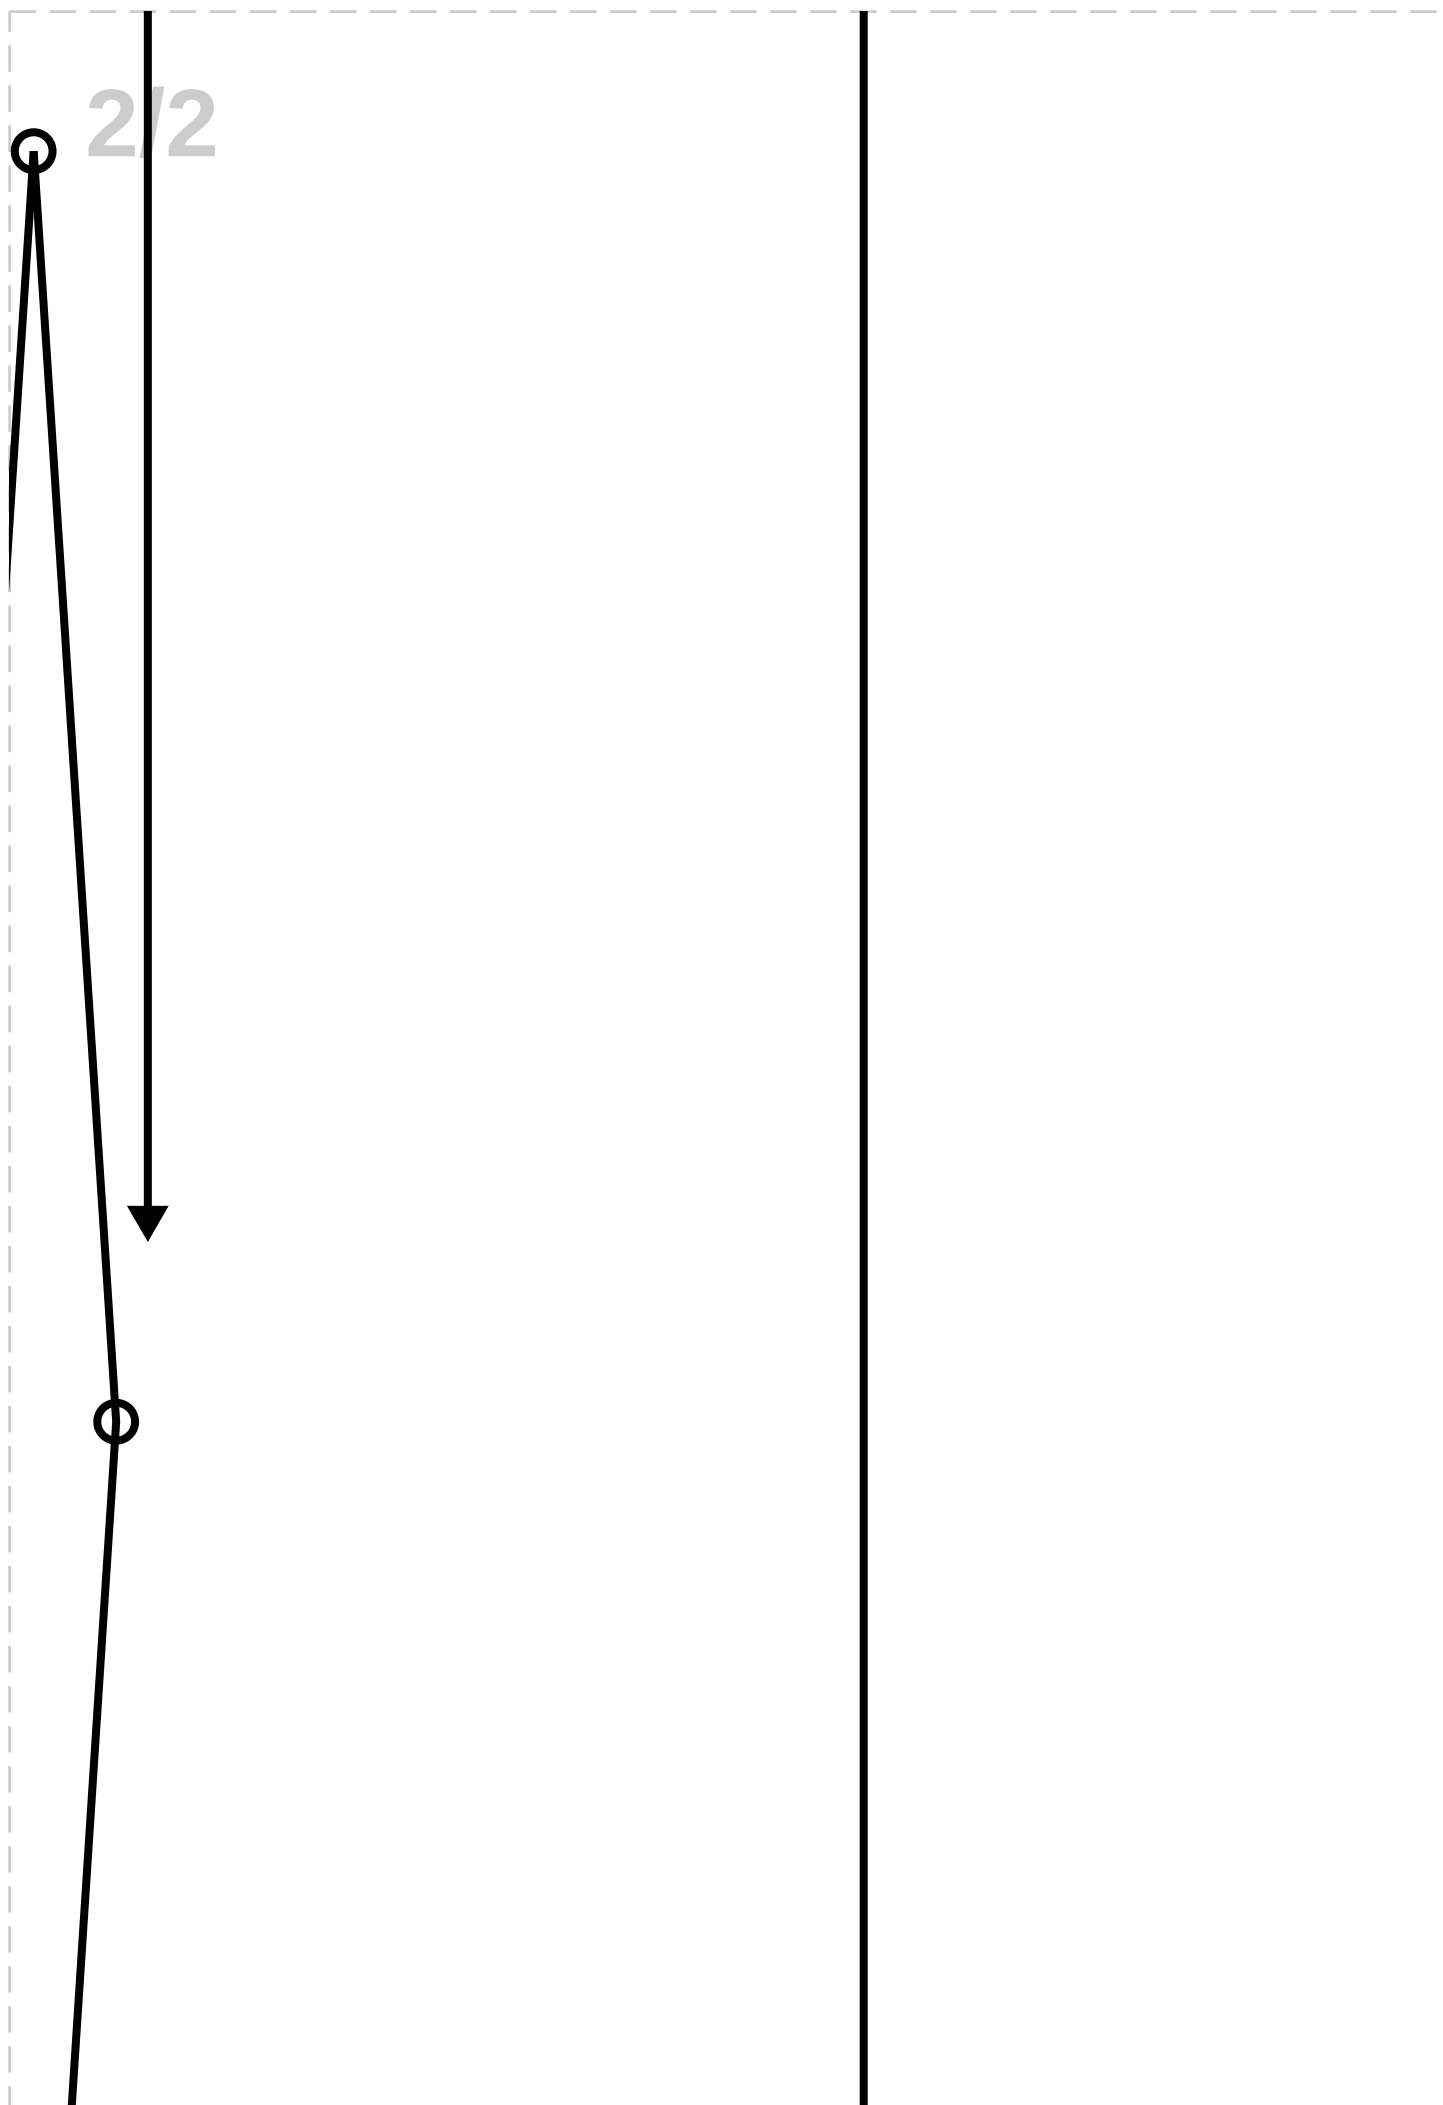

2/3

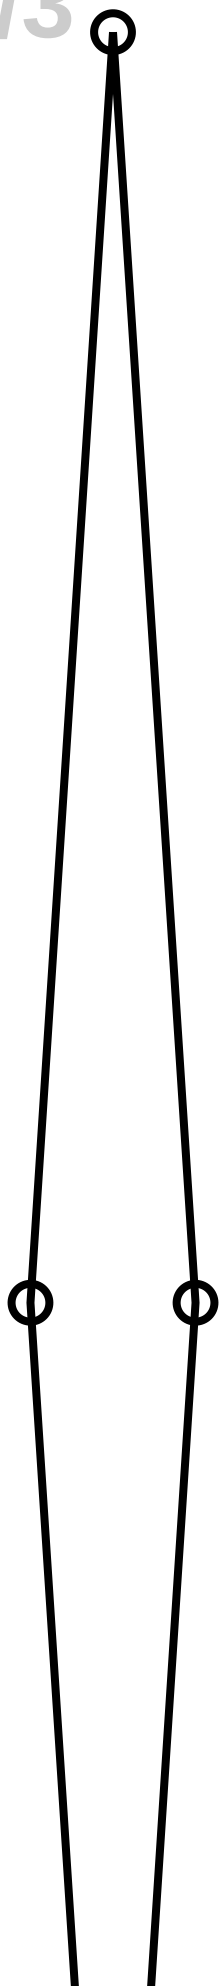

2/4

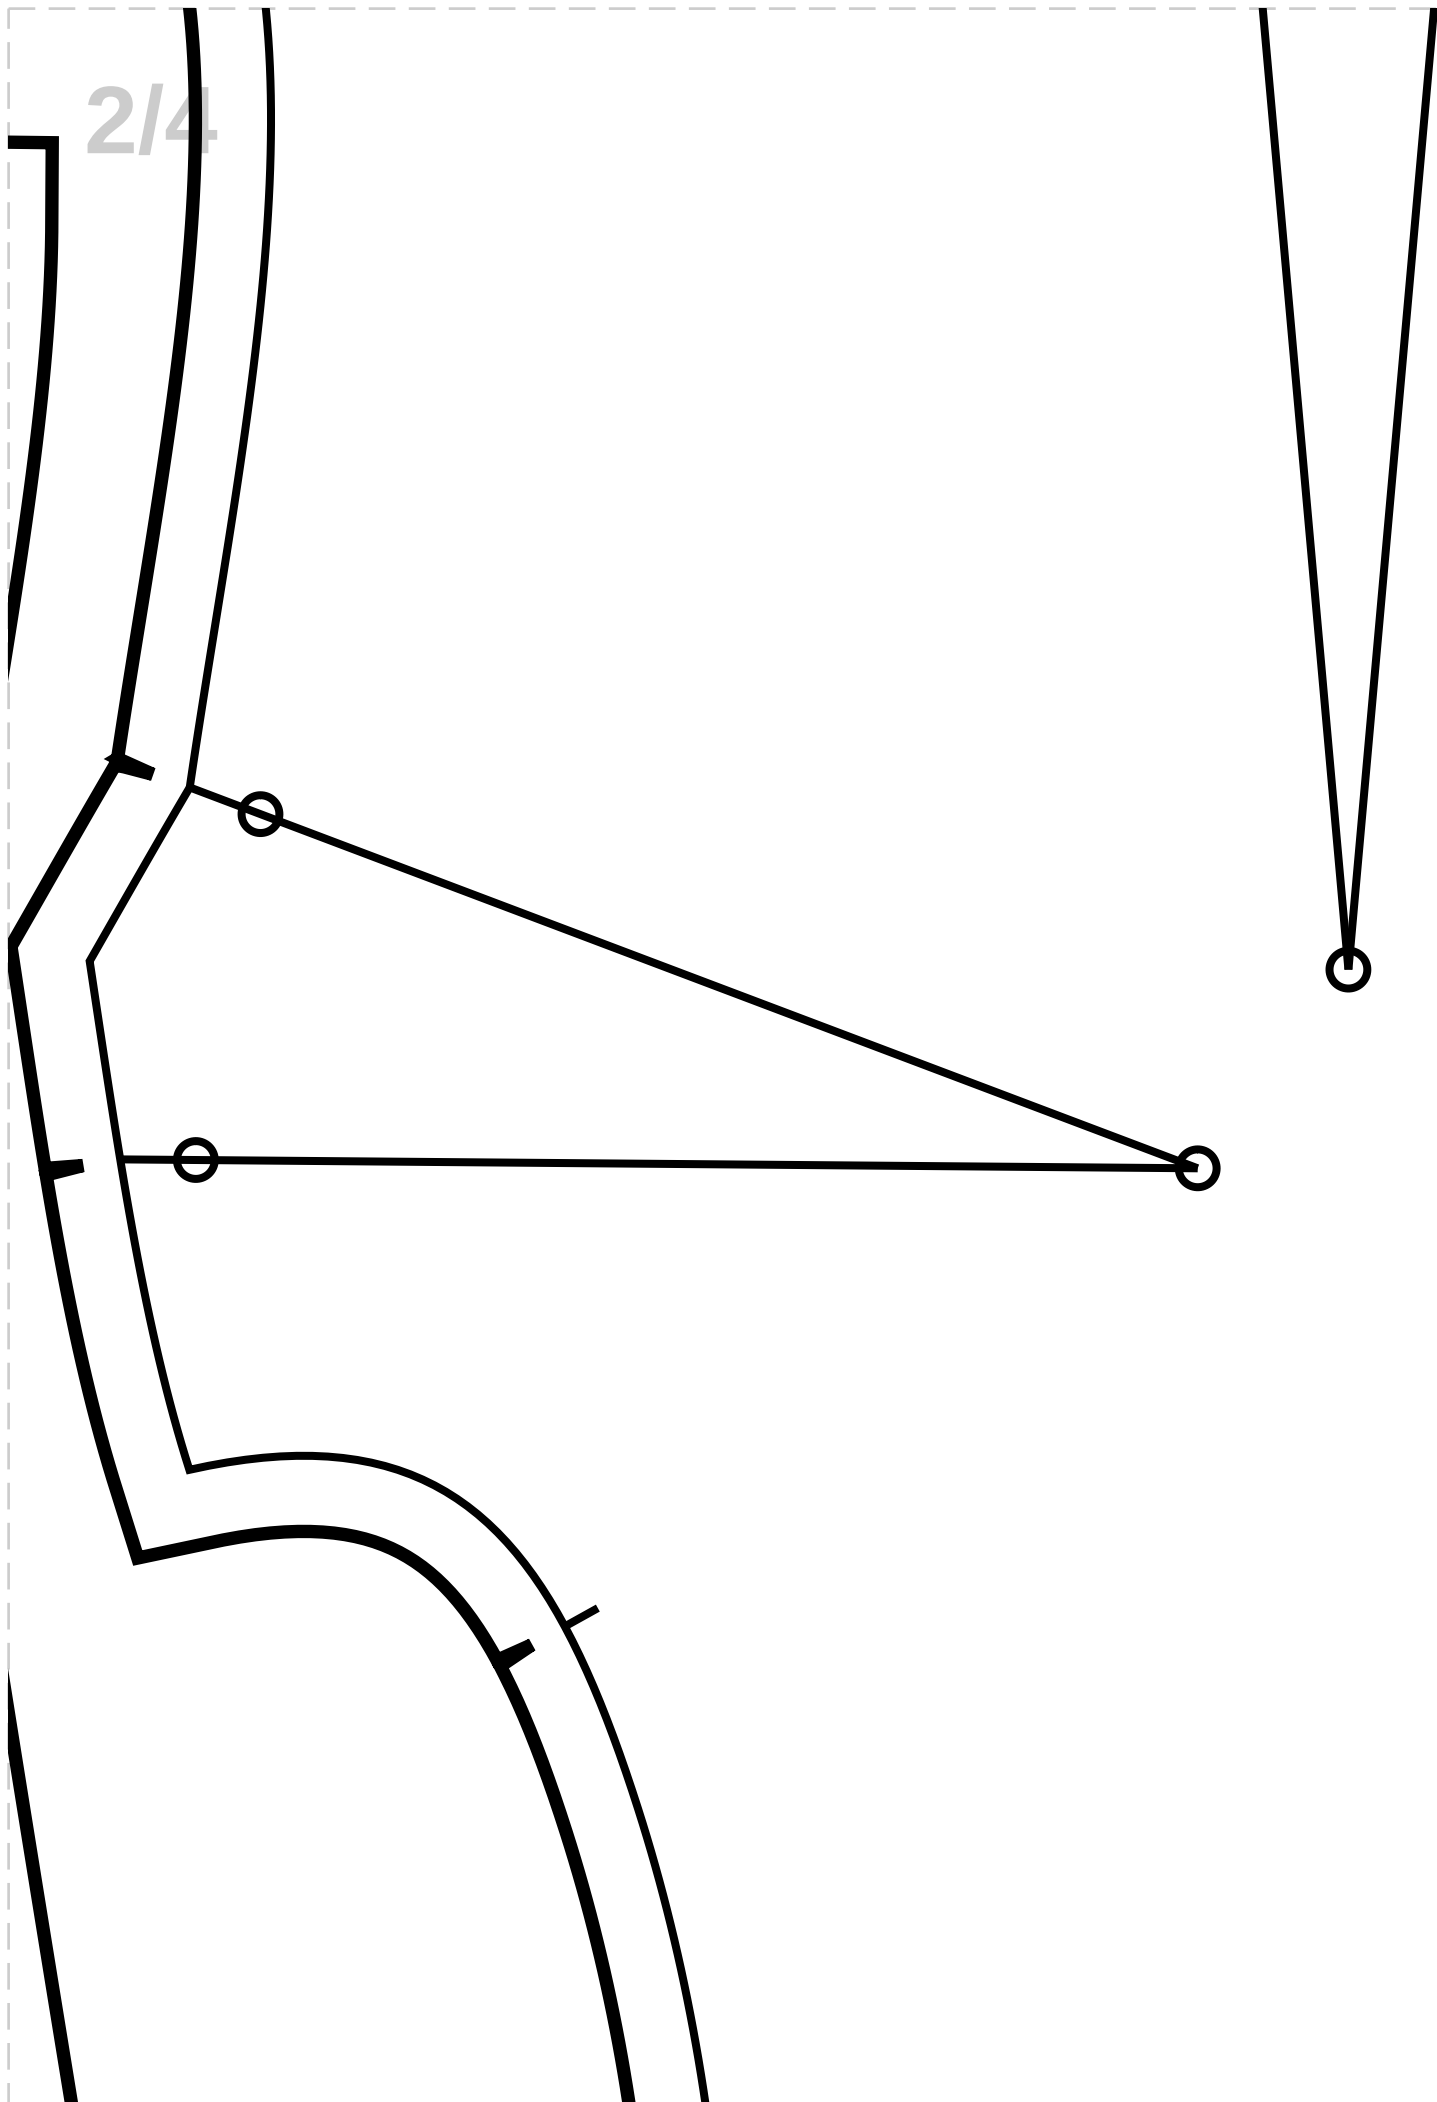


2/5



3/1

EASE

SLE
MAIN FAE

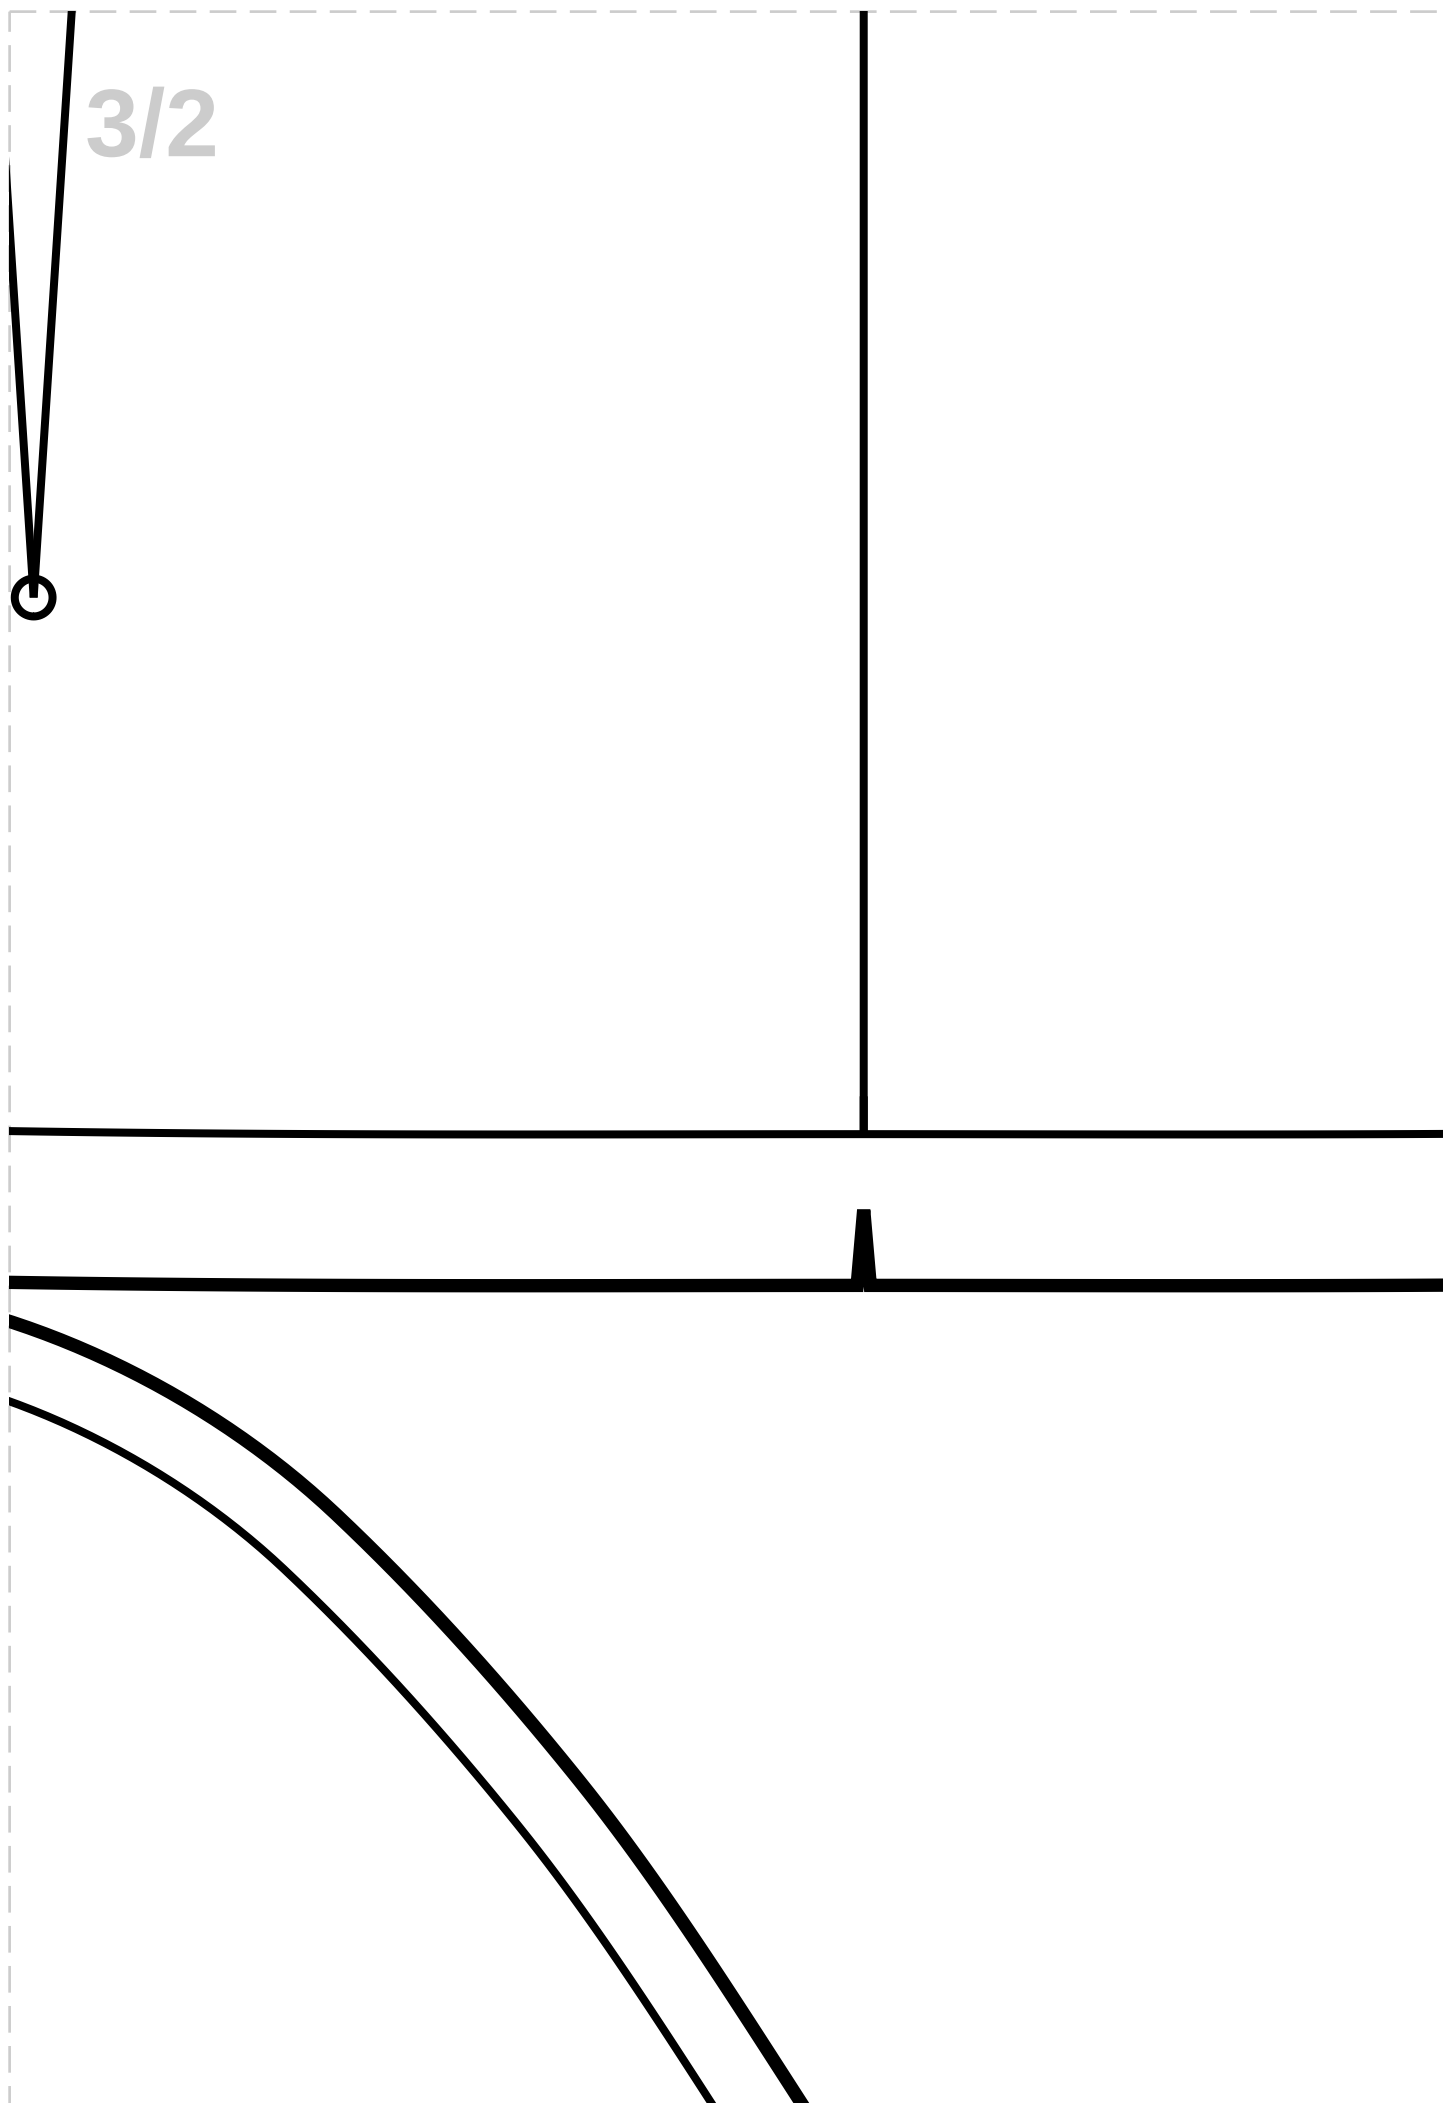


3/3




5

BACK NECK FACING
MAIN FABRIC: CUT 1
FUSIBLE INTERFACING: CUT 1

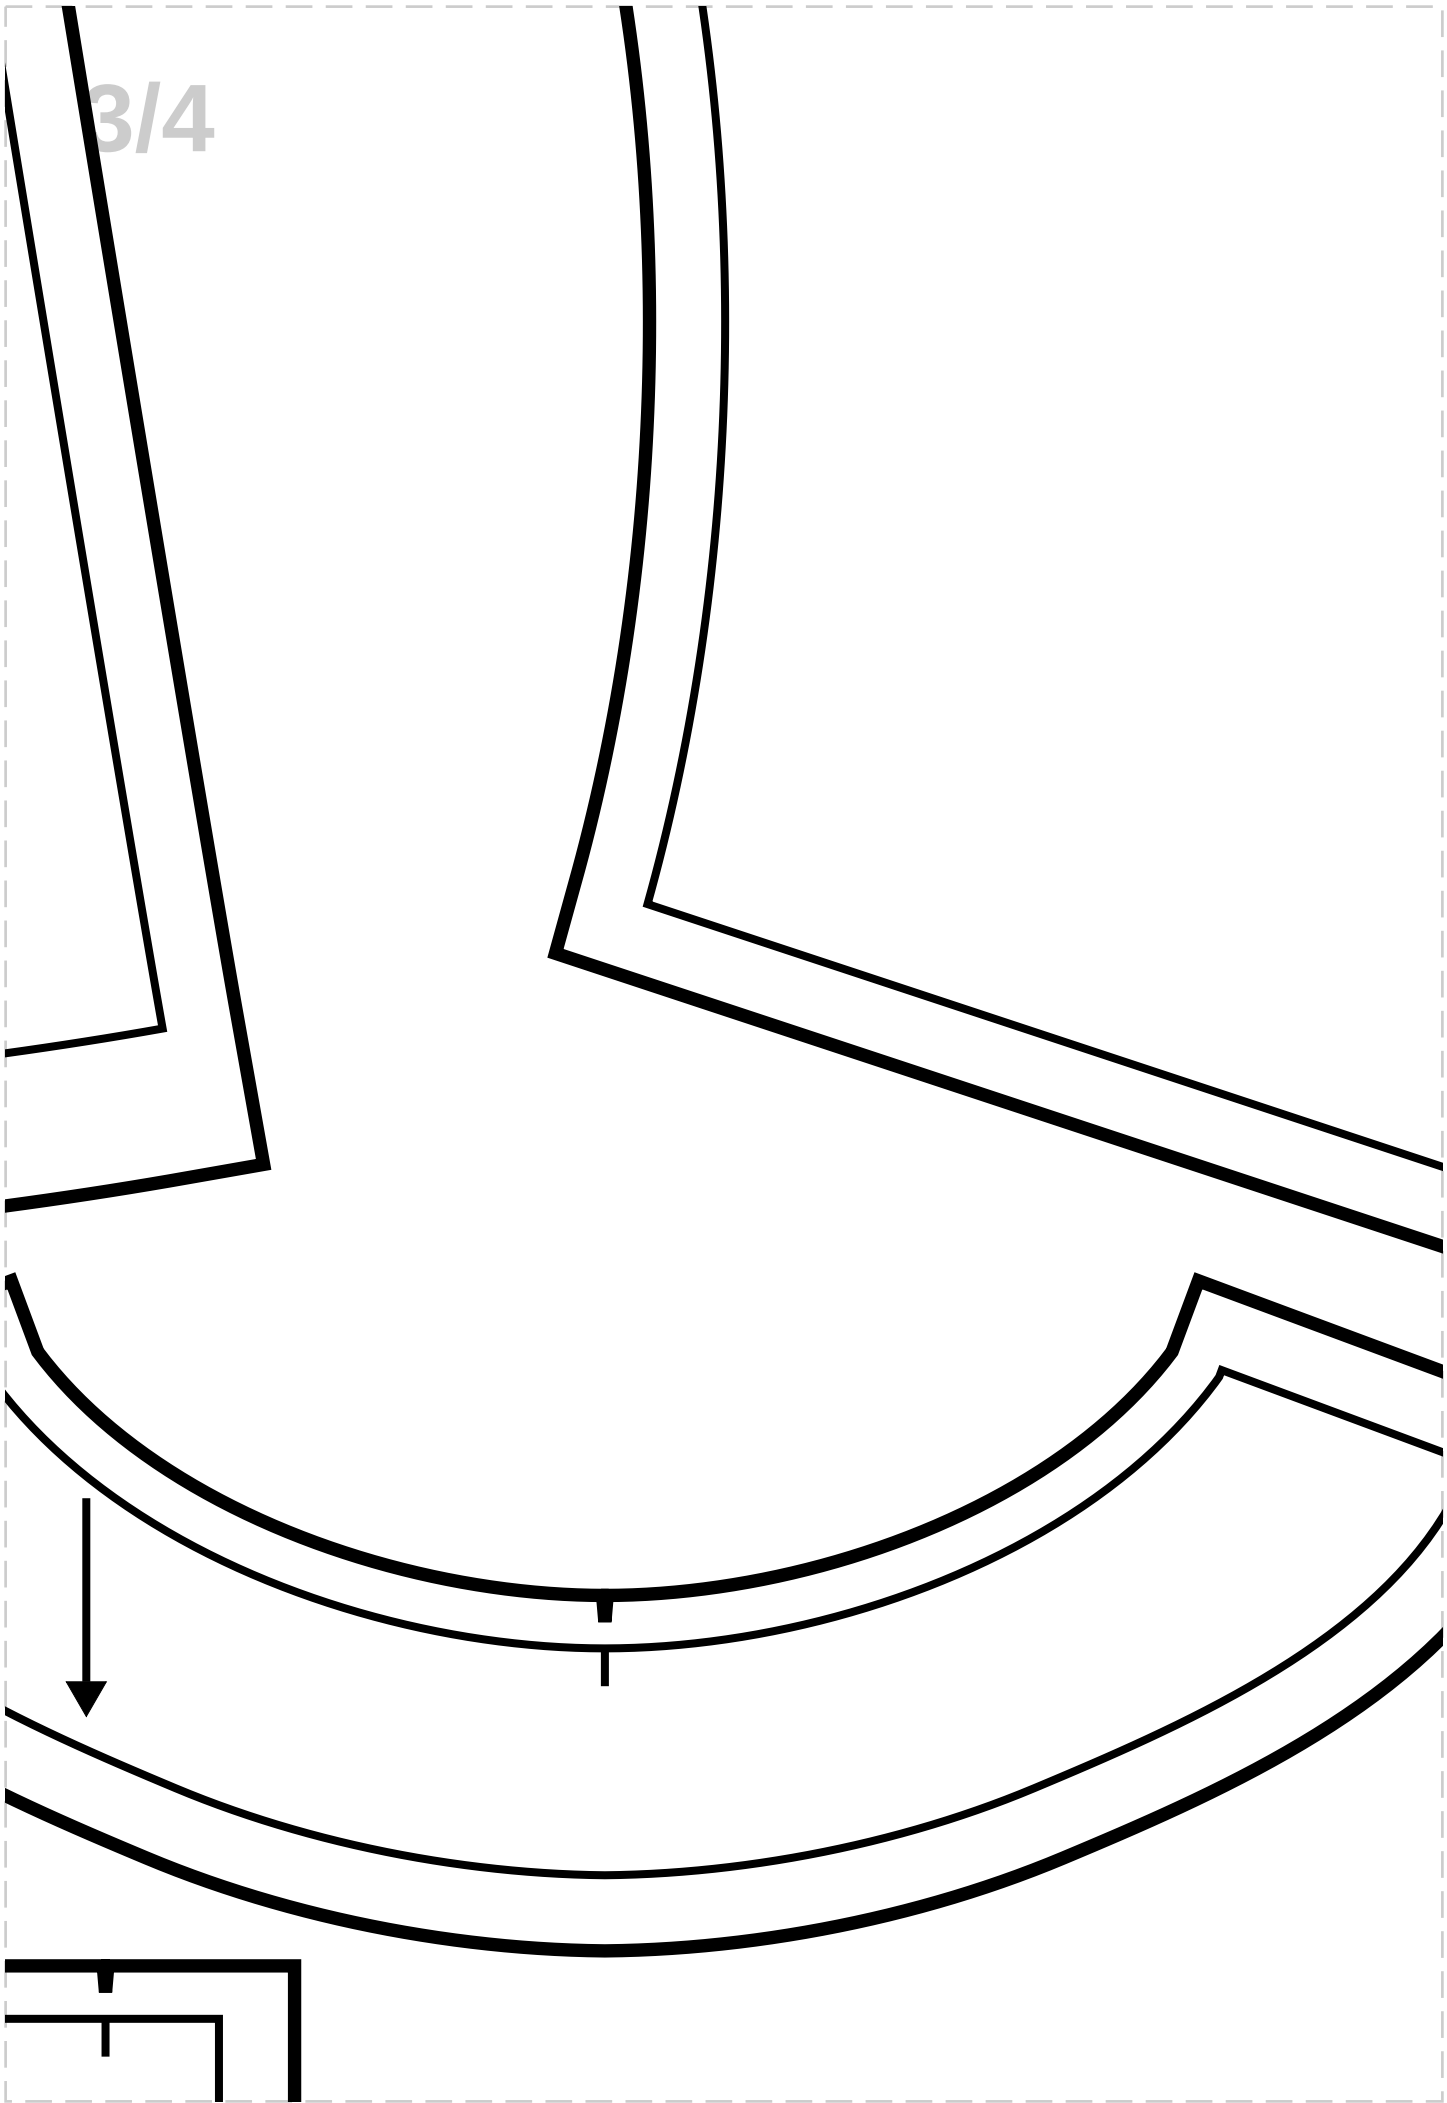

3/5




3

SEVE



BRIC: Cut 2



4/1

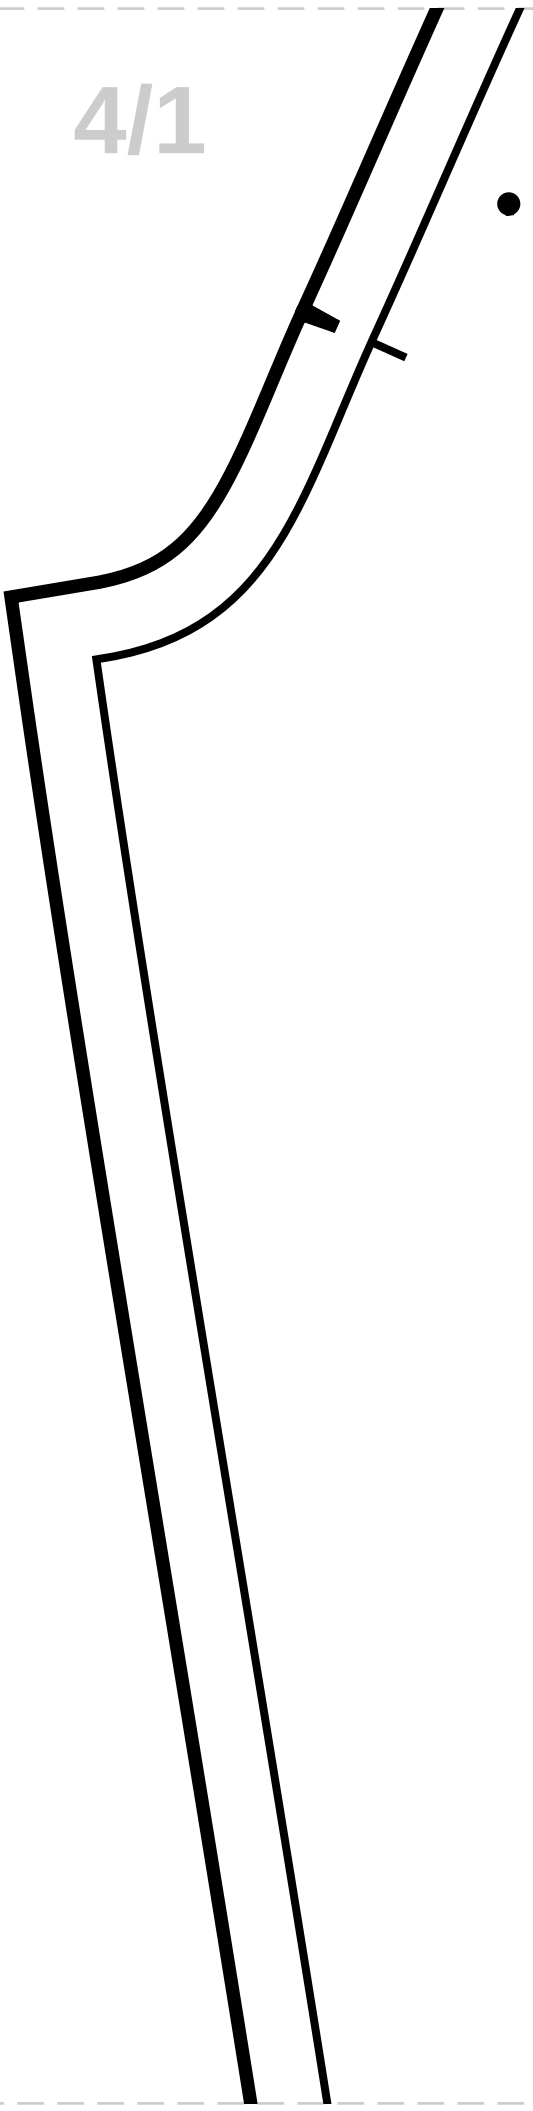

4/2

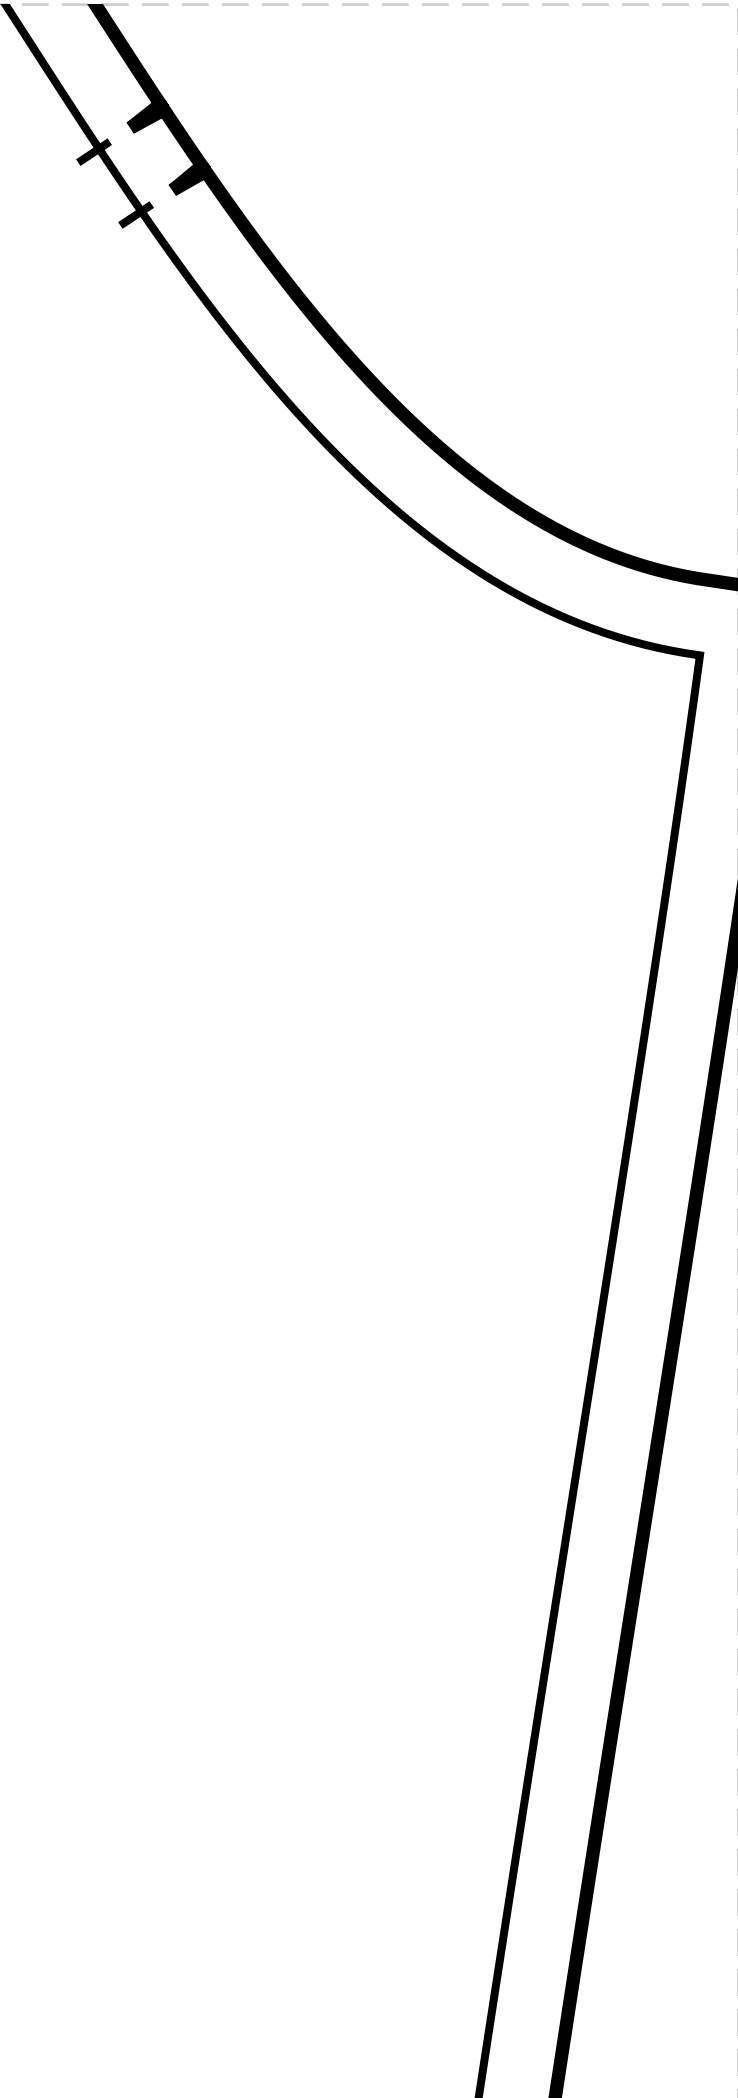

4

FRONT NECK FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

4/3



4/4




5/1


6

COLLAR STAND
MAIN FABRIC: CUT 2
FUSIBLE INTERFACING: CUT 2



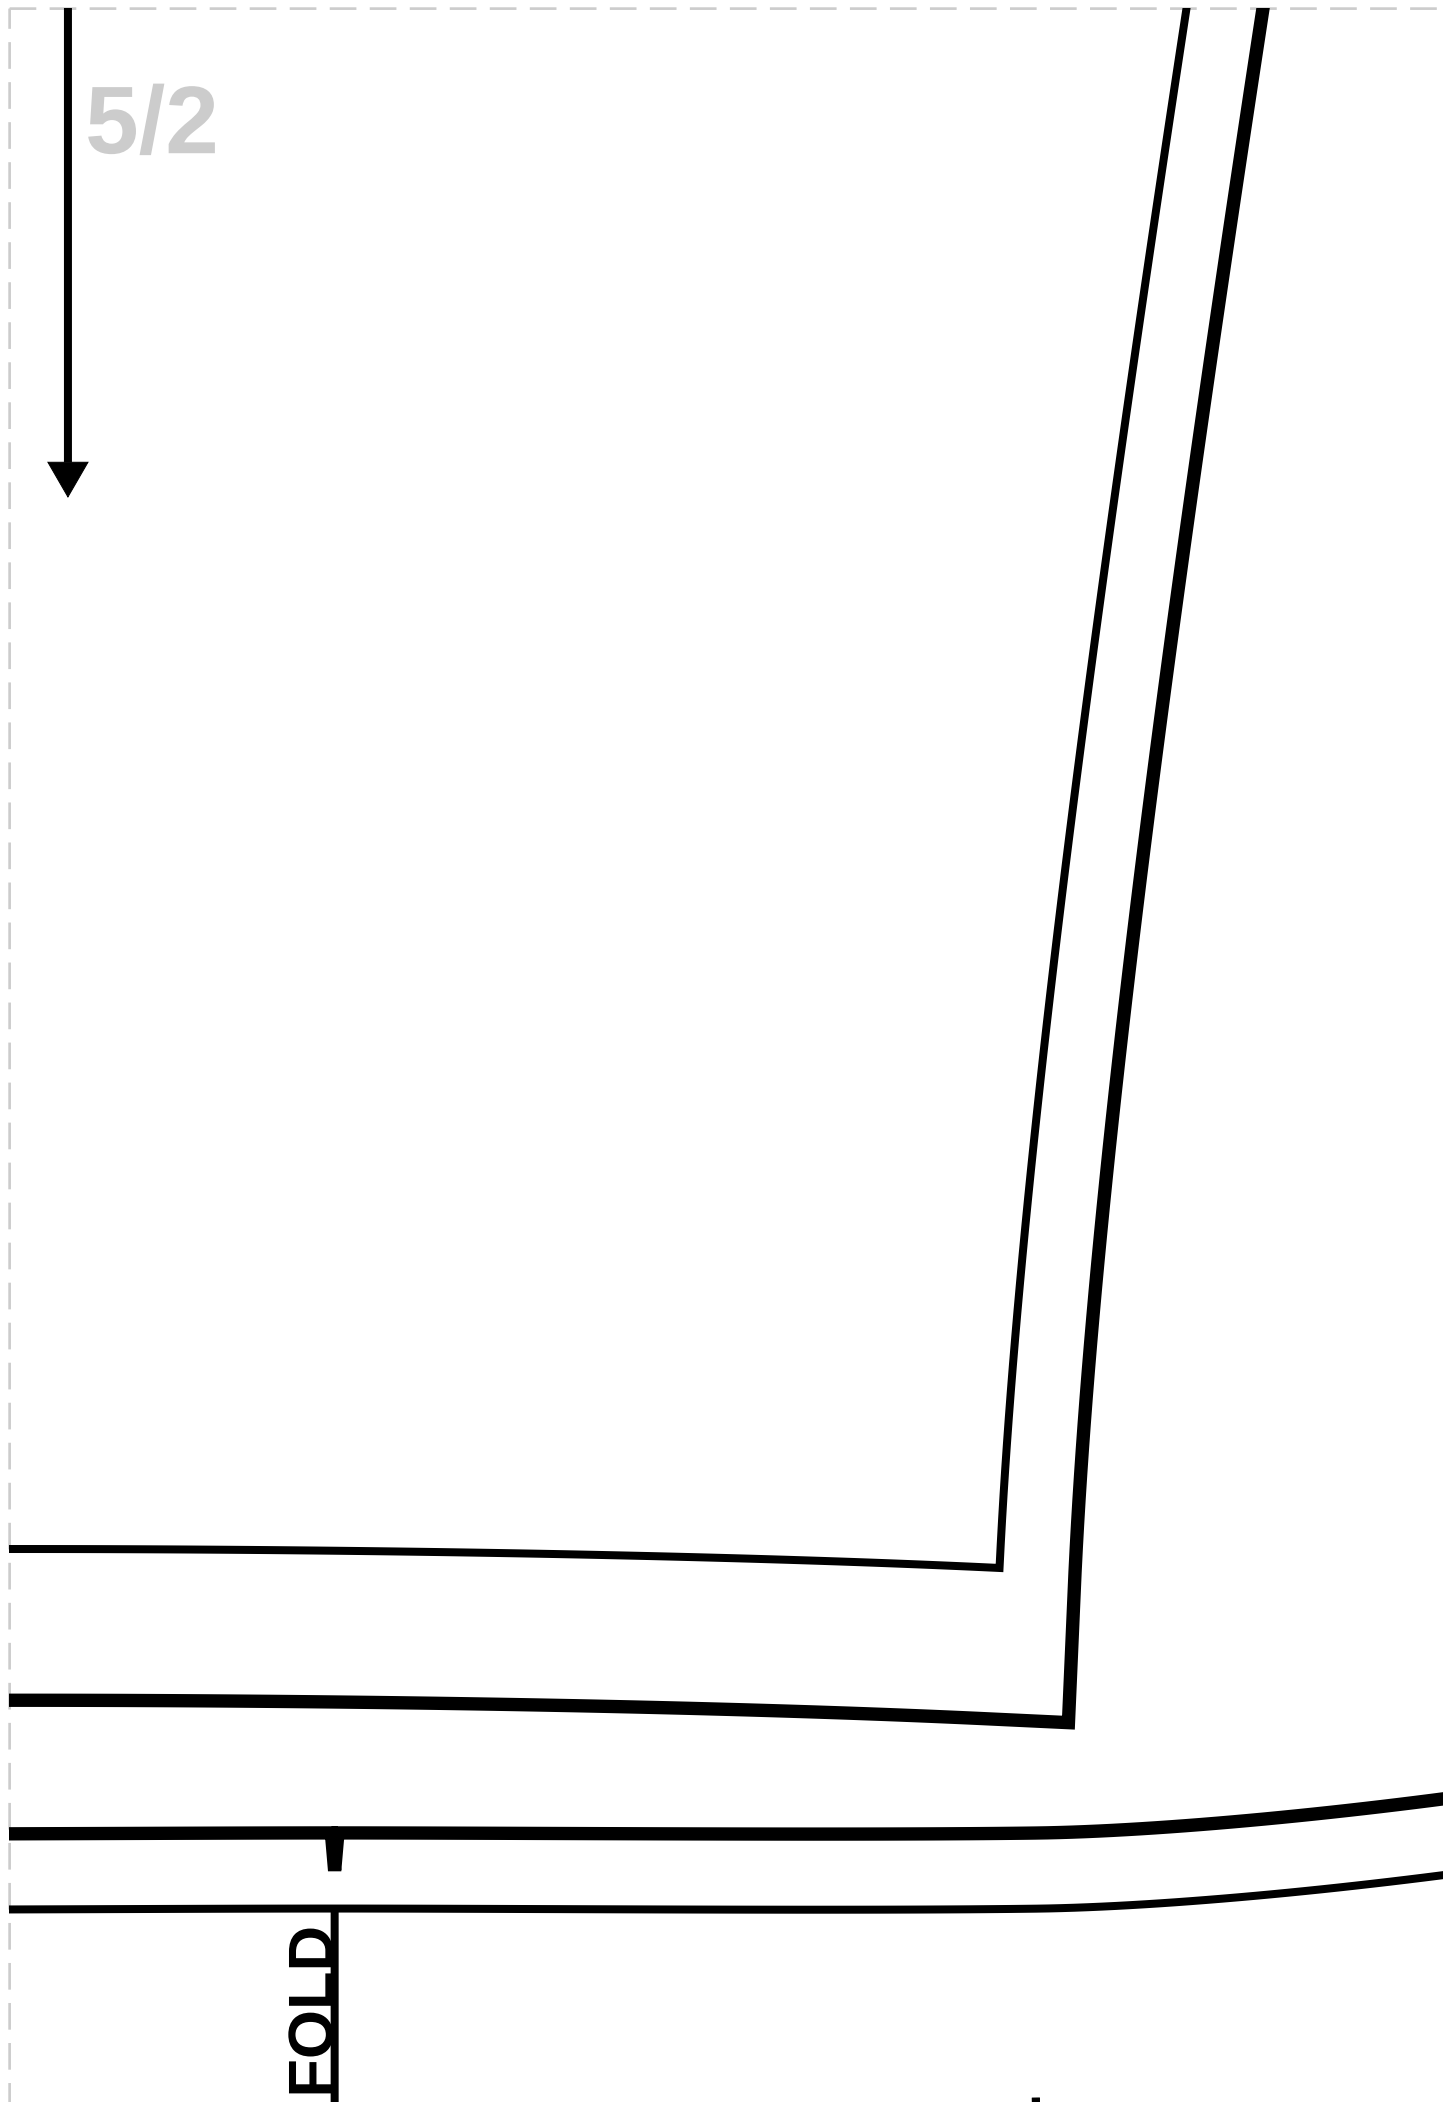

5/3

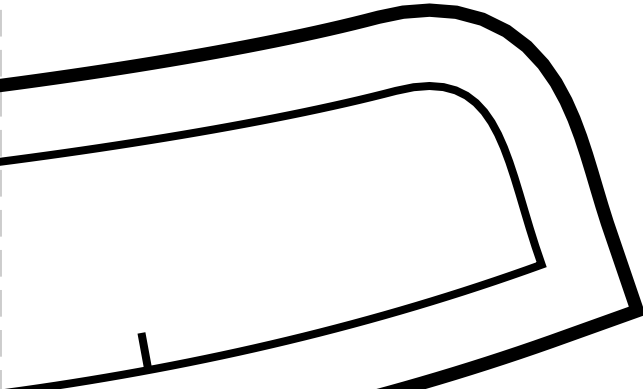

5/4

—

—

5/5


6/1




6/2



6/3

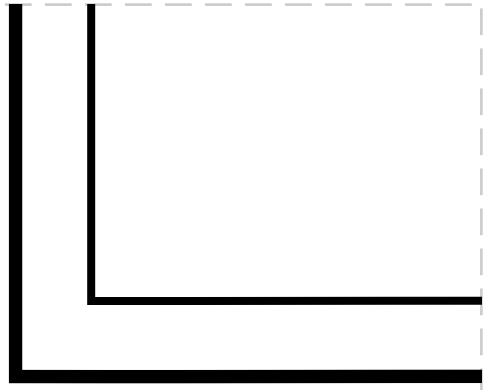

6/4



6/5