

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 104.25, Waist: 87.5, Hips: 111

Notes

How to print Printing

Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.



Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2

Pattern Specs (Circumferences are divided by 2):

1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 8.96 cm (3 1/2 in)
8. Button diameter 1.00 cm (3/8 in)
9. Front buttons quantity 8.00 pc
10. Across chest 54.96 cm (21 5/8 in)
11. Waist 46.02 cm (18 1/8 in)
12. Hips 60.44 cm (23 3/4 in)
13. Front length from HPS to hem 70.30 cm (27 5/8 in)
14. Center front length to hem 61.52 cm (24 1/4 in)
15. Center back length to hem 65.45 cm (25 3/4 in)
16. Across front 39.80 cm (15 5/8 in)
17. Across back 36.56 cm (14 3/8 in)
18. Across shoulders 41.88 cm (16 1/2 in)
19. Side seam 38.69 cm (15 1/4 in)
20. Hemline sweep 59.79 cm (23 1/2 in)
21. Armhole length front 25.13 cm (9 7/8 in)
22. Armhole length back 29.12 cm (11 1/2 in)
23. Neck opening 15.96 cm (6 1/4 in)
24. Neckline length 45.07 cm (17 3/4 in)
25. Back neck drop 3.70 cm (1 1/2 in)

- 26. Shoulder width 12.60 cm (5 in)
- 27. Bust dart to bust dart 25.87 cm (10 1/8 in)
- 28. Sleeve length 58.24 cm (22 7/8 in)
- 29. Sleeve upper arm width 39.20 cm (15 3/8 in)
- 30. Sleeve opening 25.59 cm (10 1/8 in)
- 31. Sleeve cap length 55.74 none (22 in)
- 32. Stand height 3.00 cm (1 1/8 in)
- 33. Collar length 45.06 cm (17 3/4 in)


Technical drawing of a dress pattern, showing four pieces labeled 1, 2, 3, and 4. The pieces are laid out on a grid background.

- Piece 1: FRONT** (MAIN FABRIC: CUT 2). This piece includes the bodice front and a large skirt section. It features a waist dart, a side seam, and a curved hemline. A label "FRONT" is at the top, and "MAIN FABRIC: CUT 2" is below it.
- Piece 2: BACK** (MAIN FABRIC: CUT 1). This piece includes the bodice back and a skirt section. It features a waist dart, a side seam, and a curved hemline. A label "BACK" is at the top, and "MAIN FABRIC: CUT 1" is below it.
- Piece 3: SLEEVE** (MAIN FABRIC: CUT 2). This piece is a sleeve pattern with a curved hemline. A label "SLEEVE" is at the top, and "MAIN FABRIC: CUT 2" is below it. A "EASE" label is also present.
- Piece 4: FRONT NECK FACING** (FABRIC: INTERFACING: CUT 2). This piece is a narrow strip of fabric for the neck facing. A label "FRONT NECK FACING" is at the top, and "FABRIC: INTERFACING: CUT 2" is below it.

The drawing includes various construction lines, seam allowances, and labels for fabric and ease. The pieces are numbered 1, 2, 3, and 4.

1/1



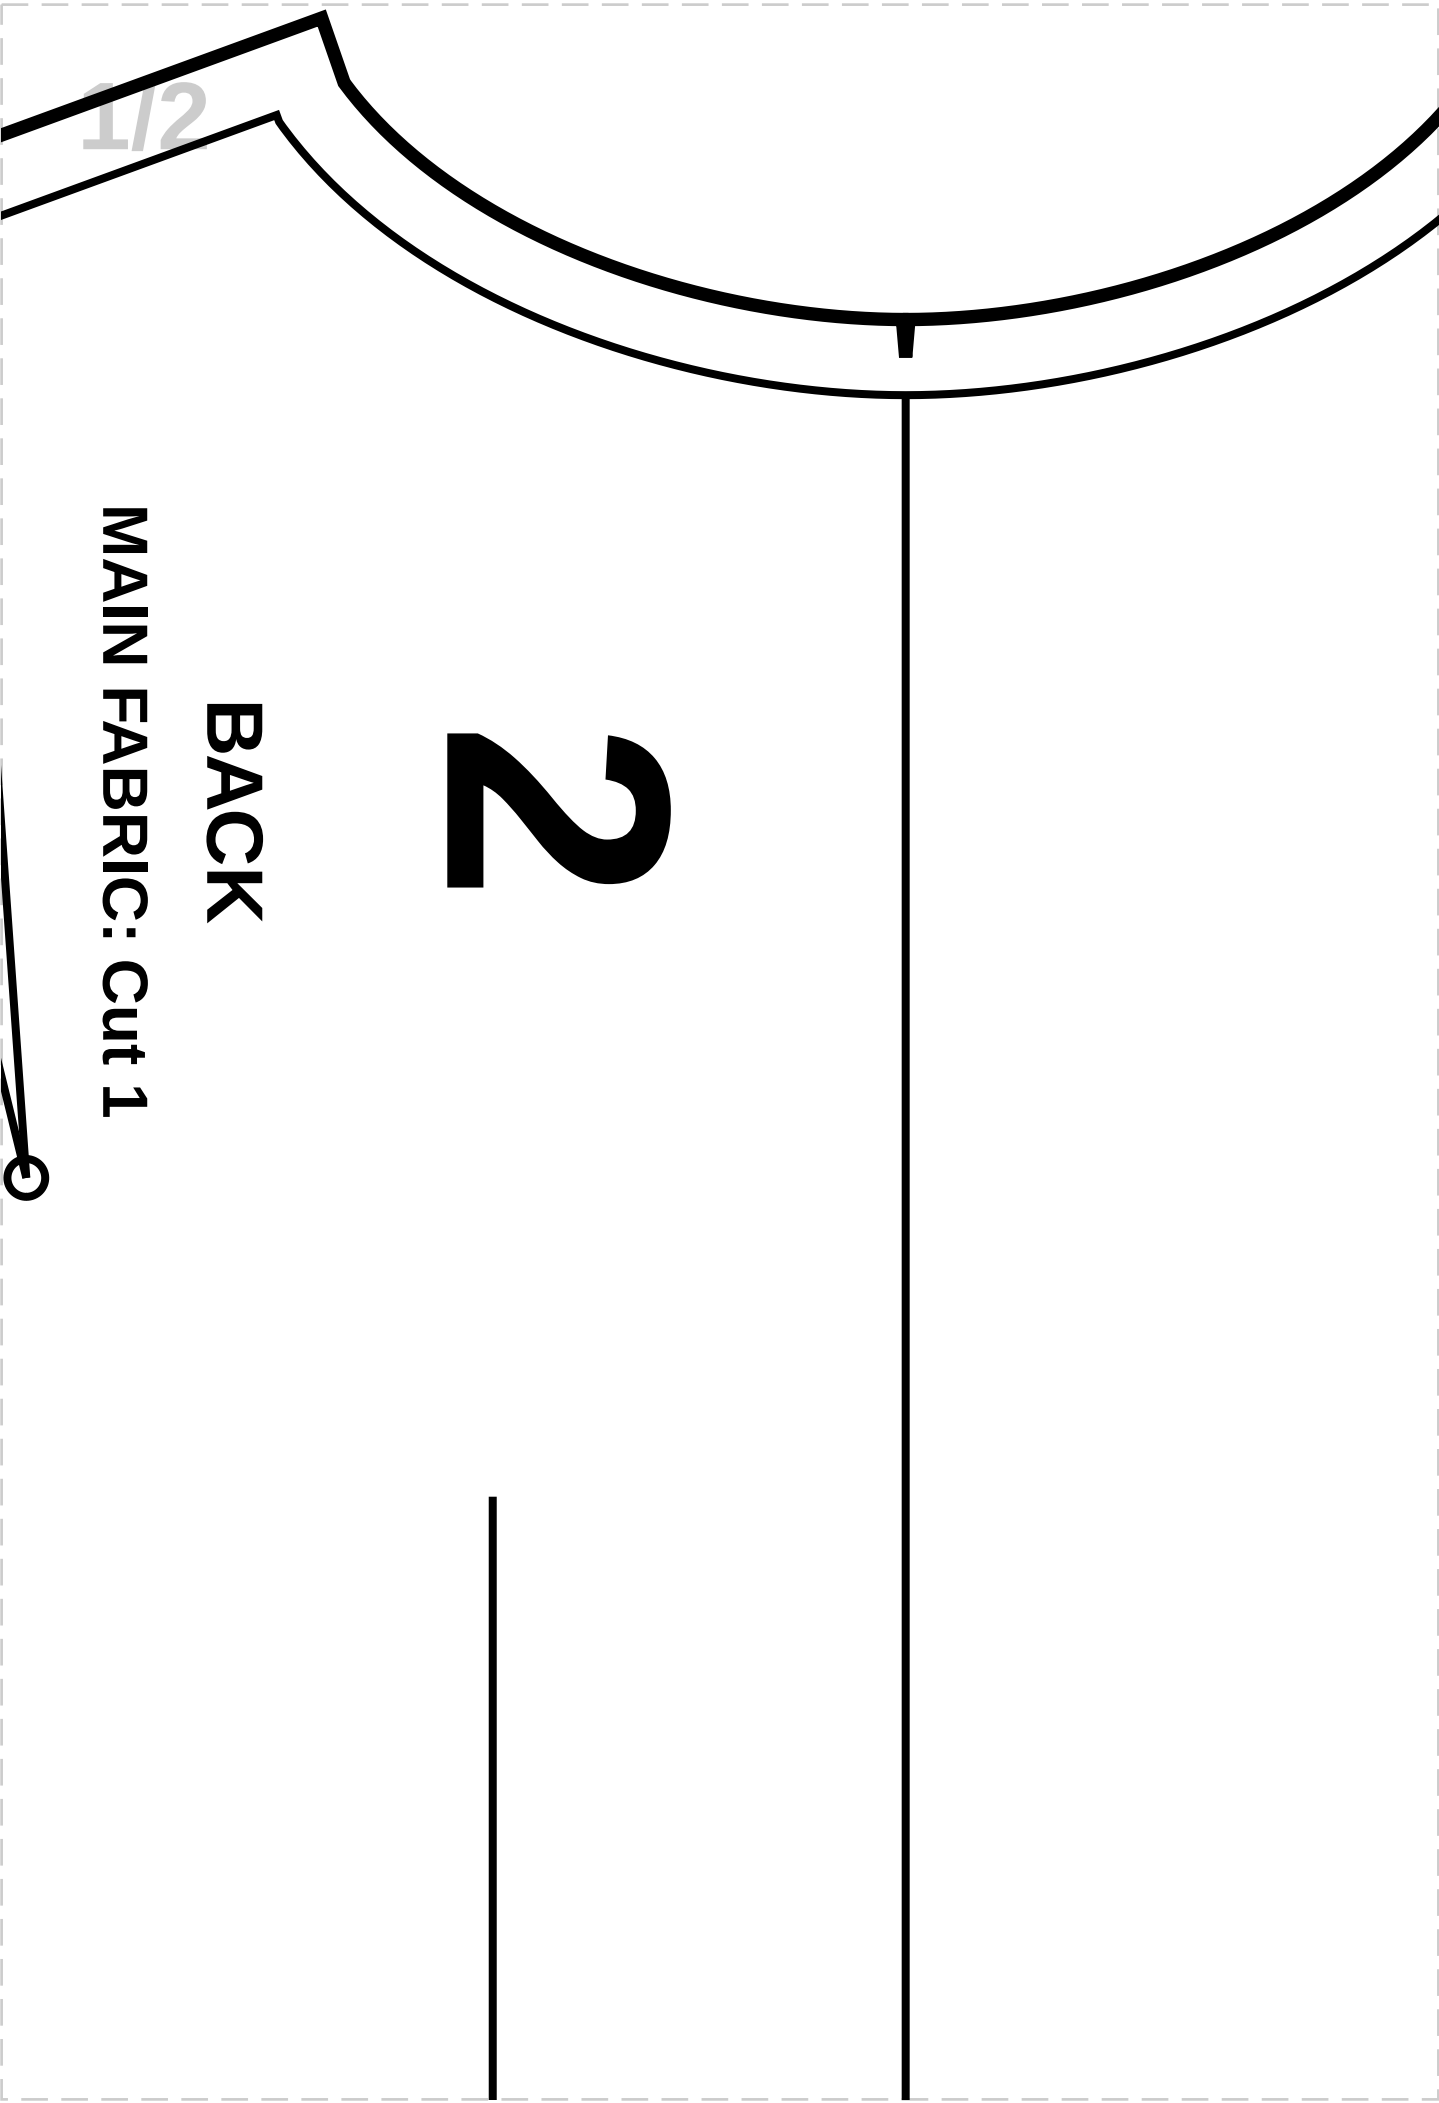


1/2

2

BACK

MAIN FABRIC: Cut 1

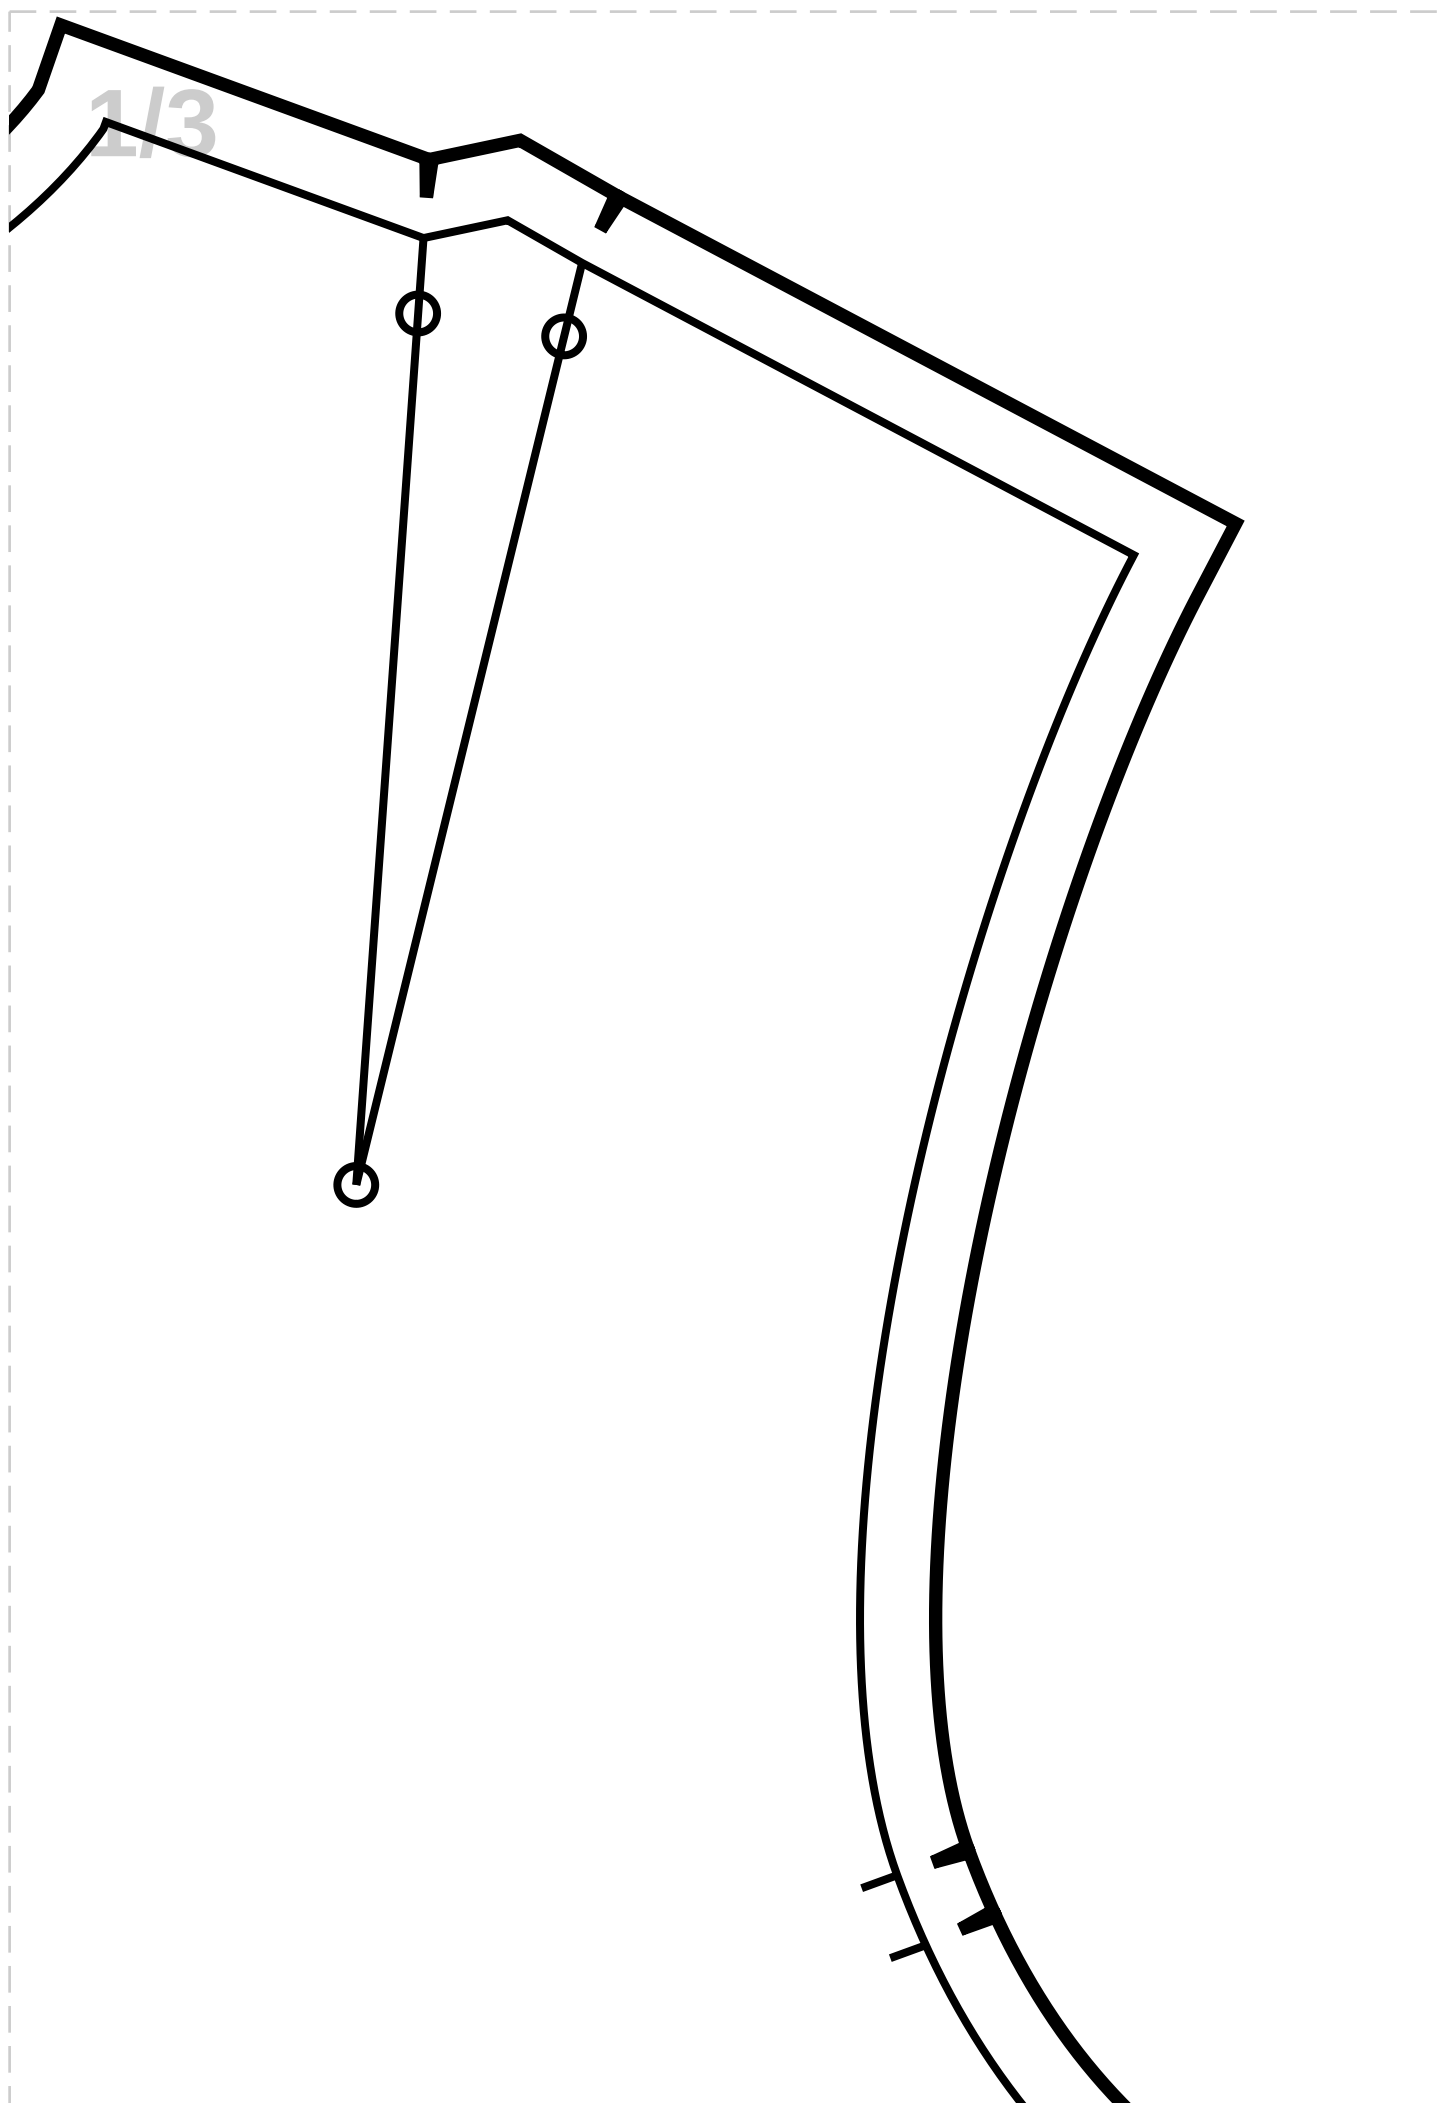


1/4


1


FRONT

MAIN FABRIC: Cut 2


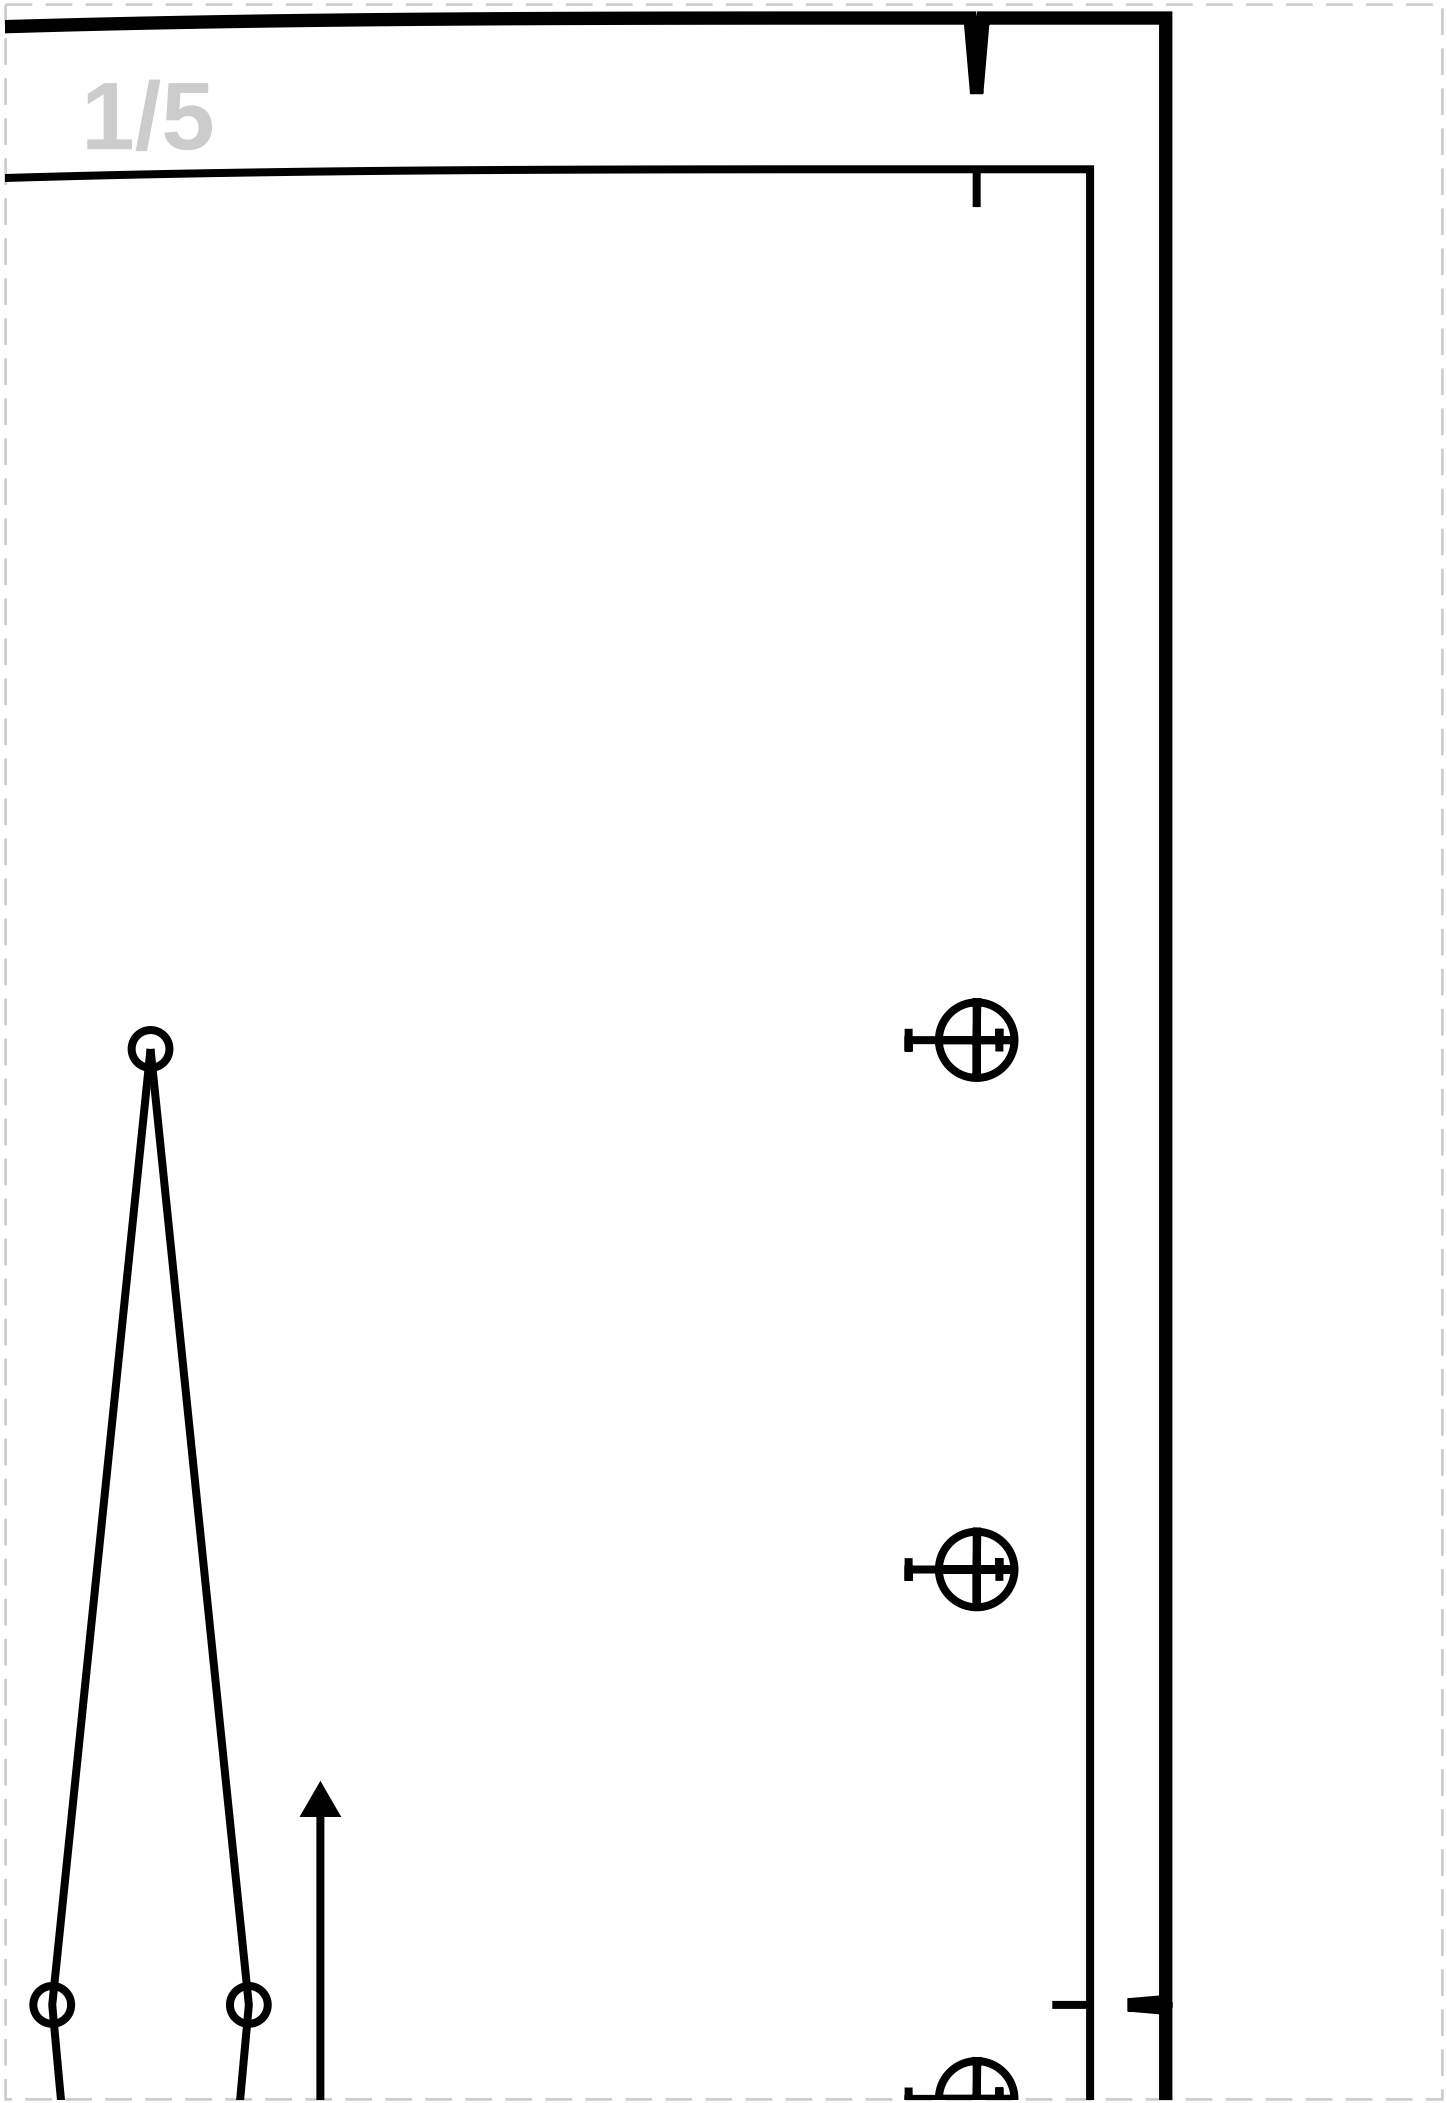


2/1

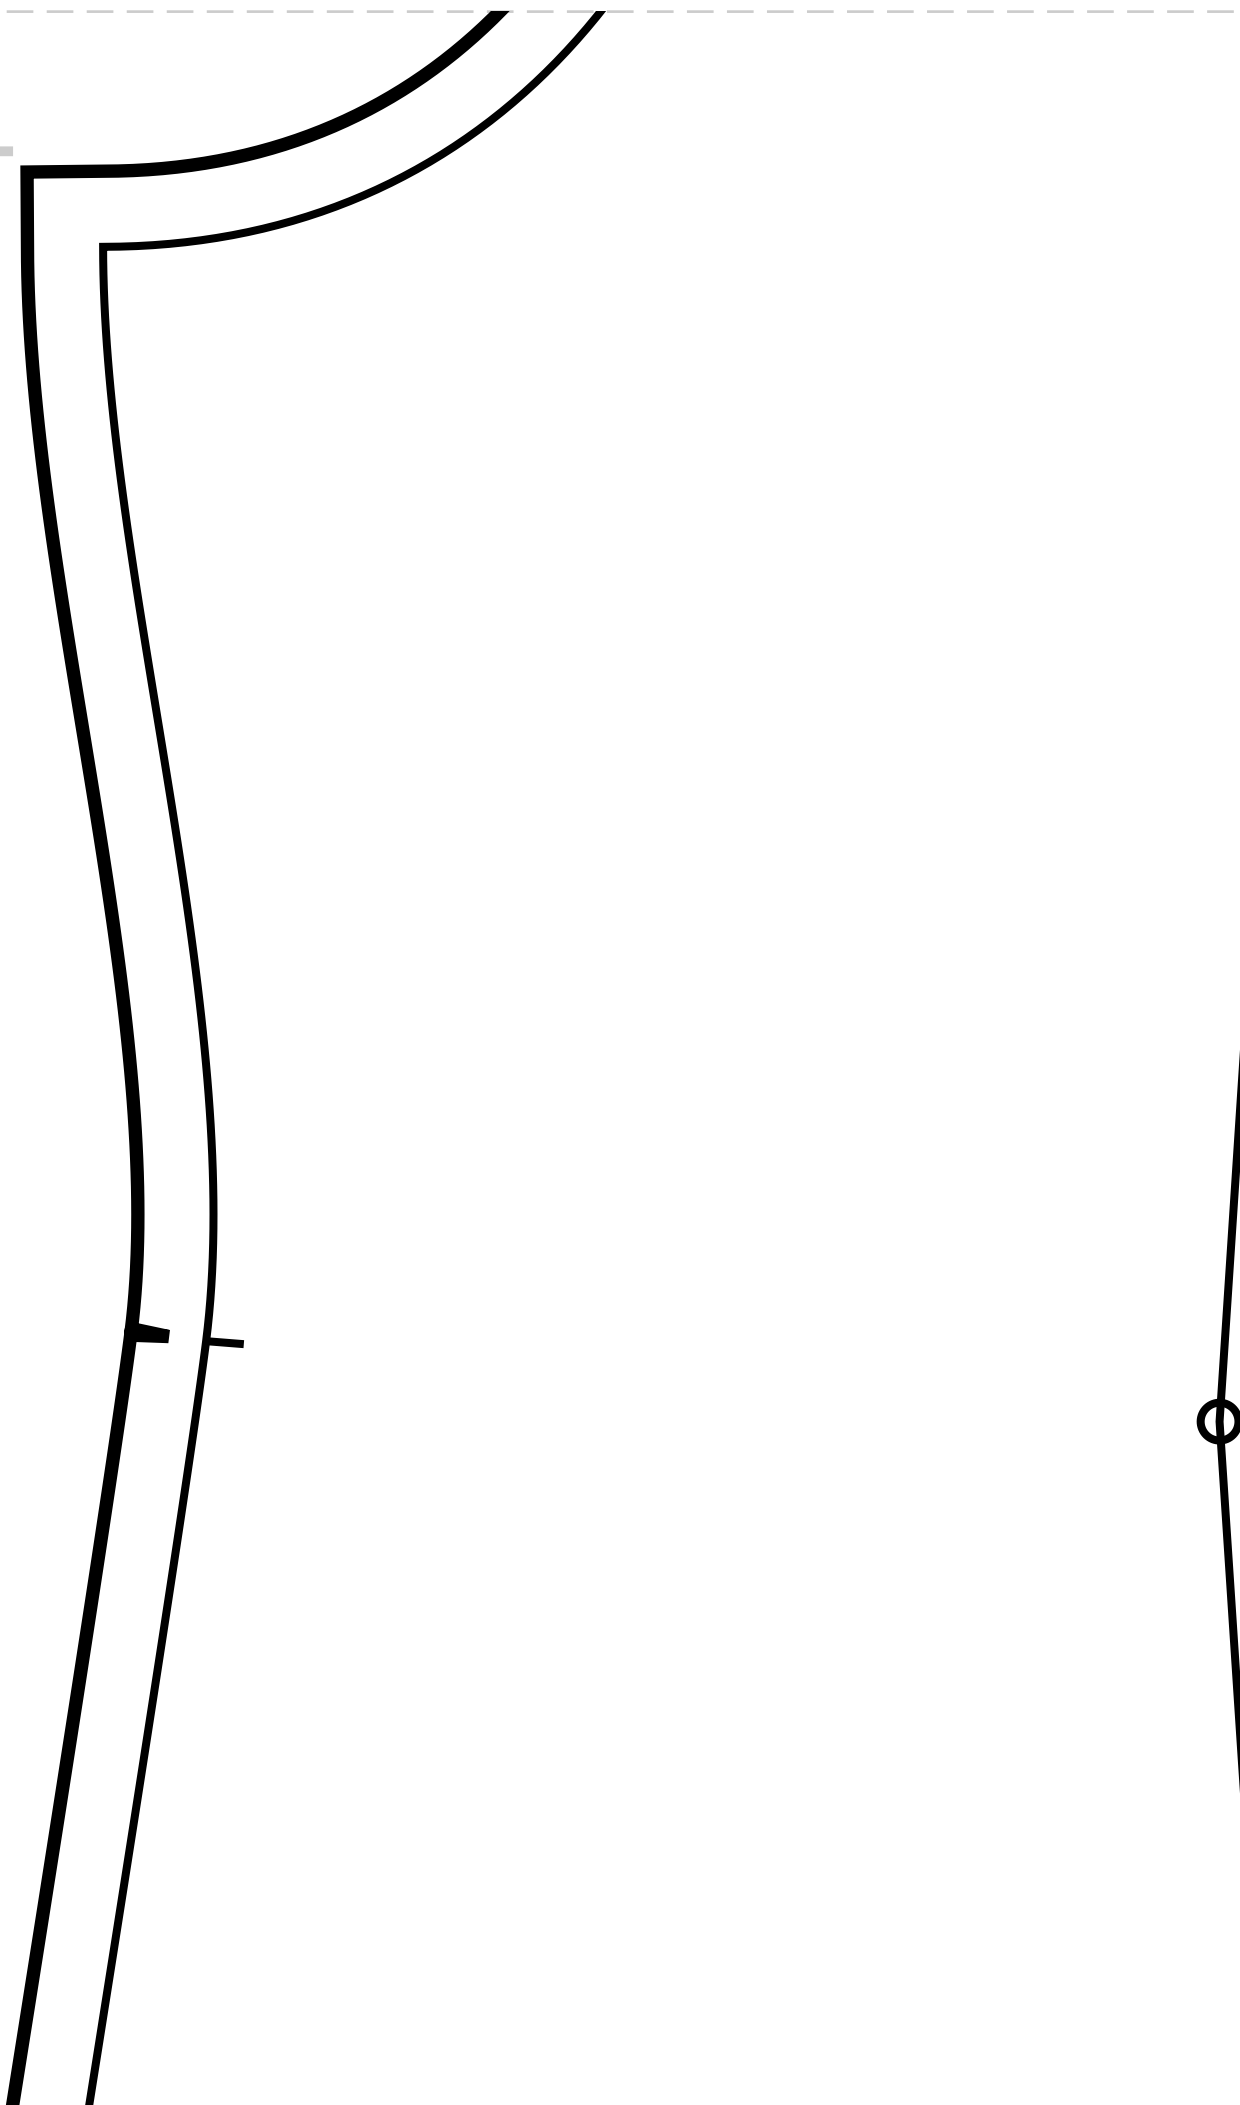


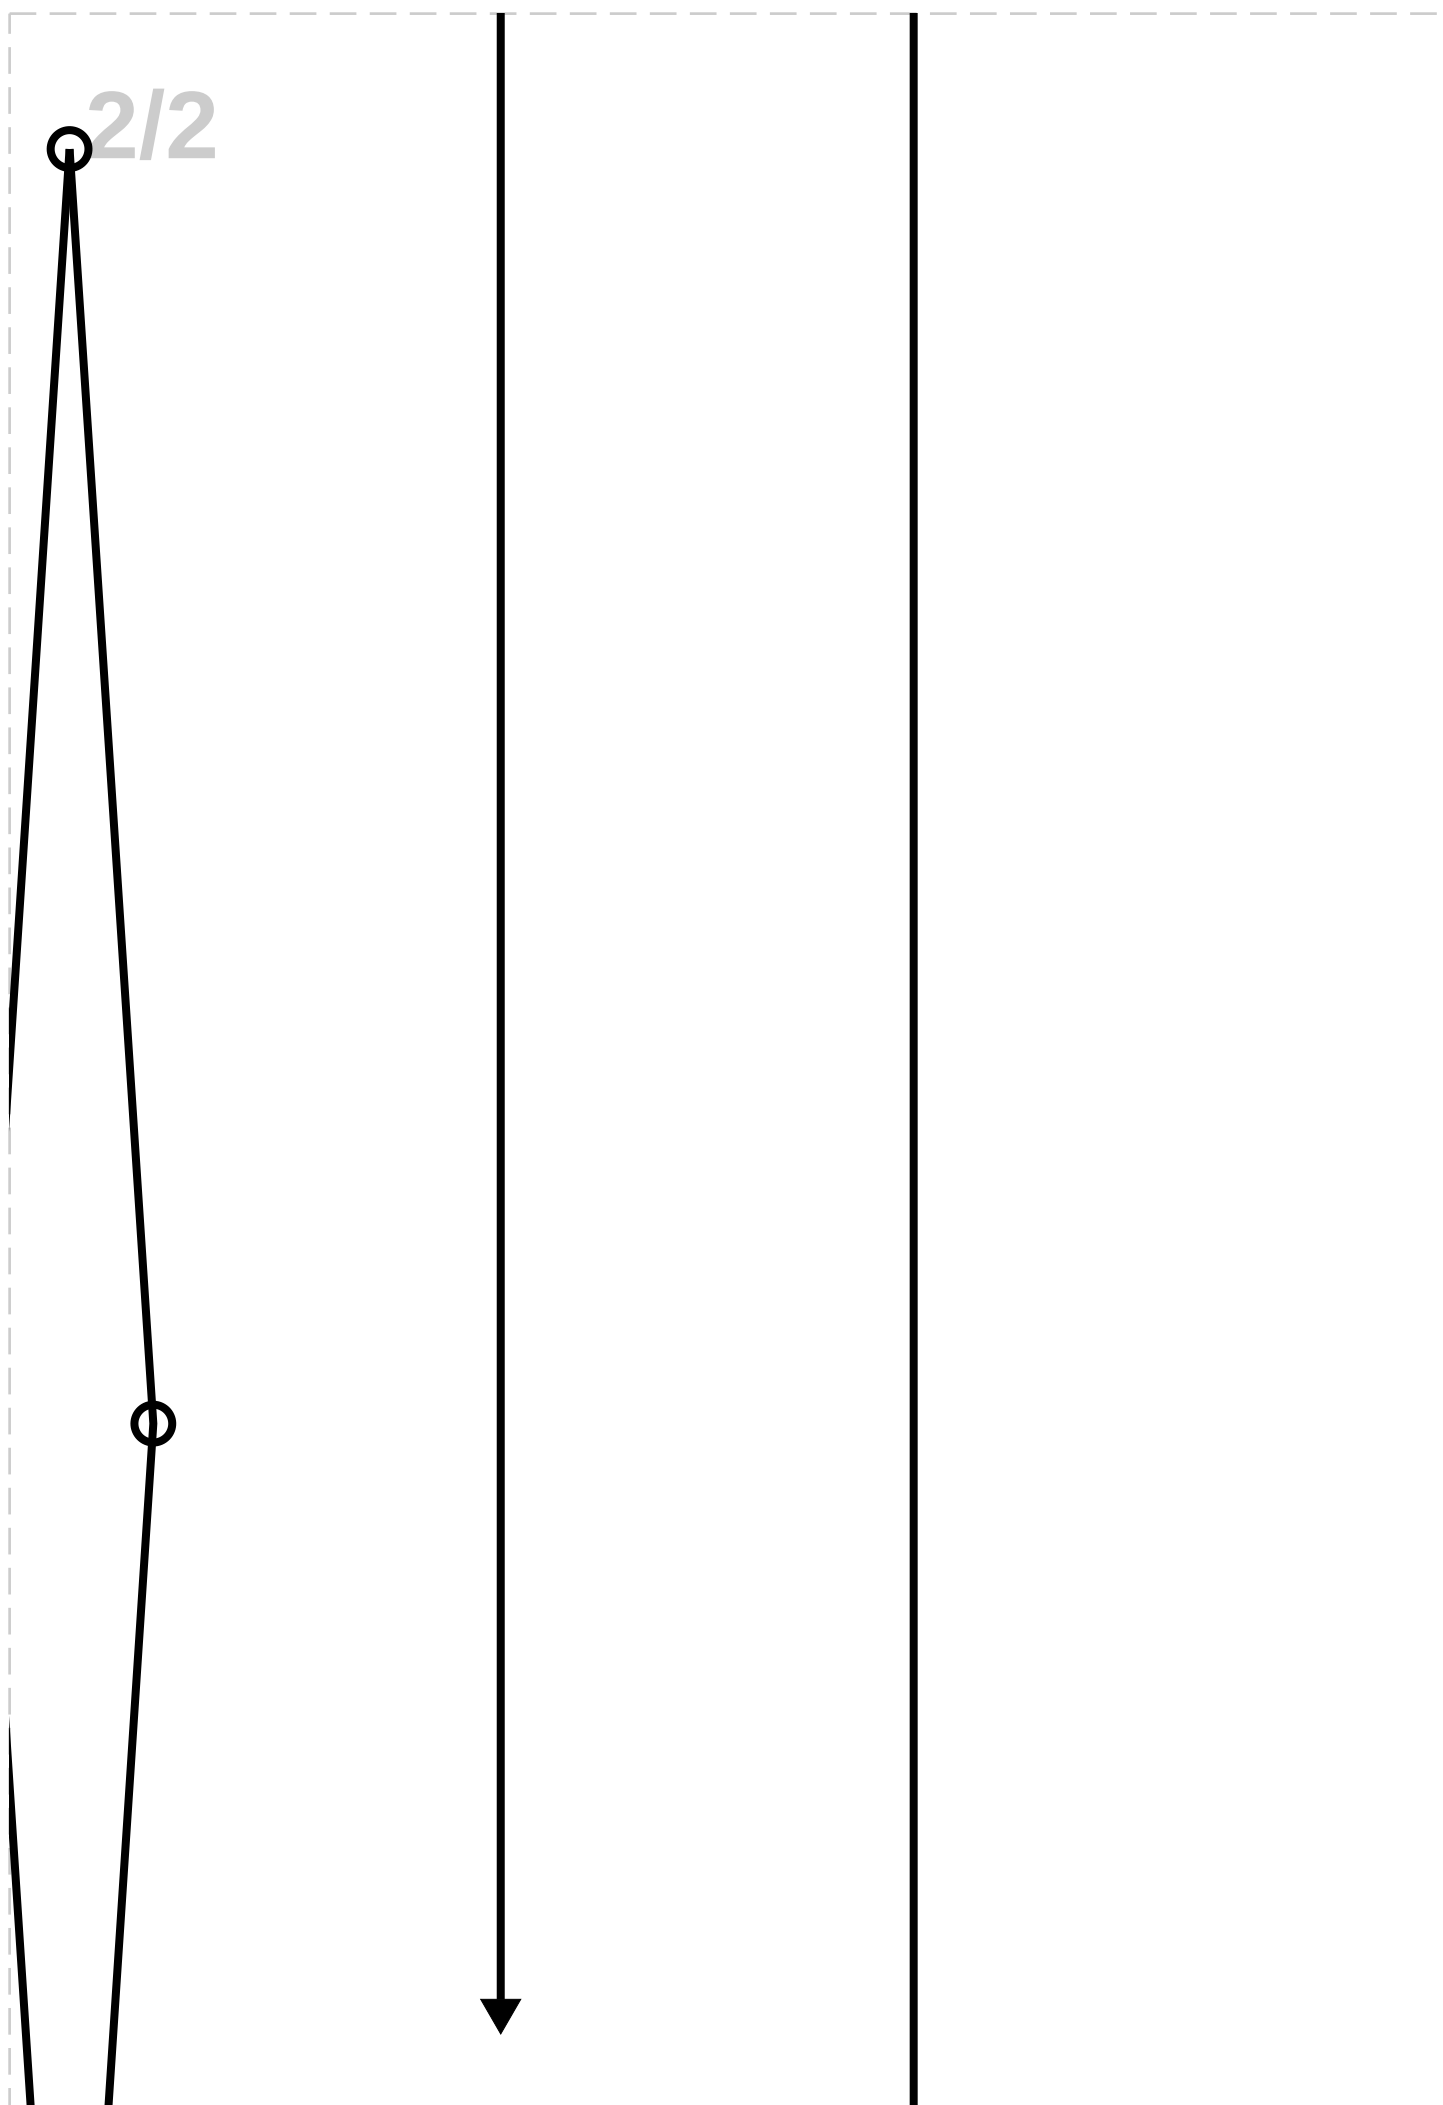


2/3

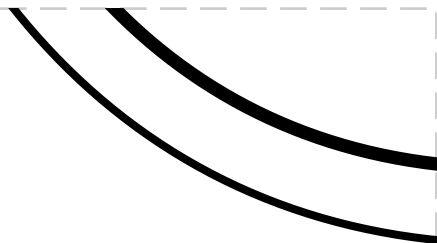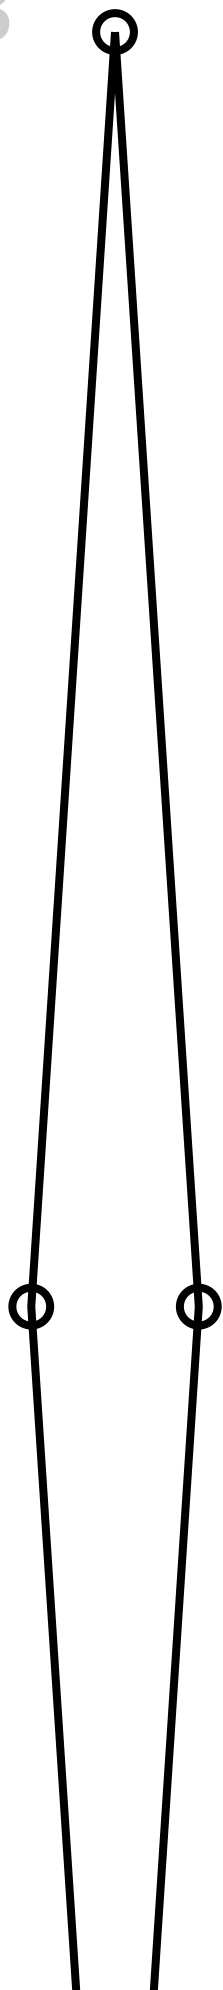

2/4

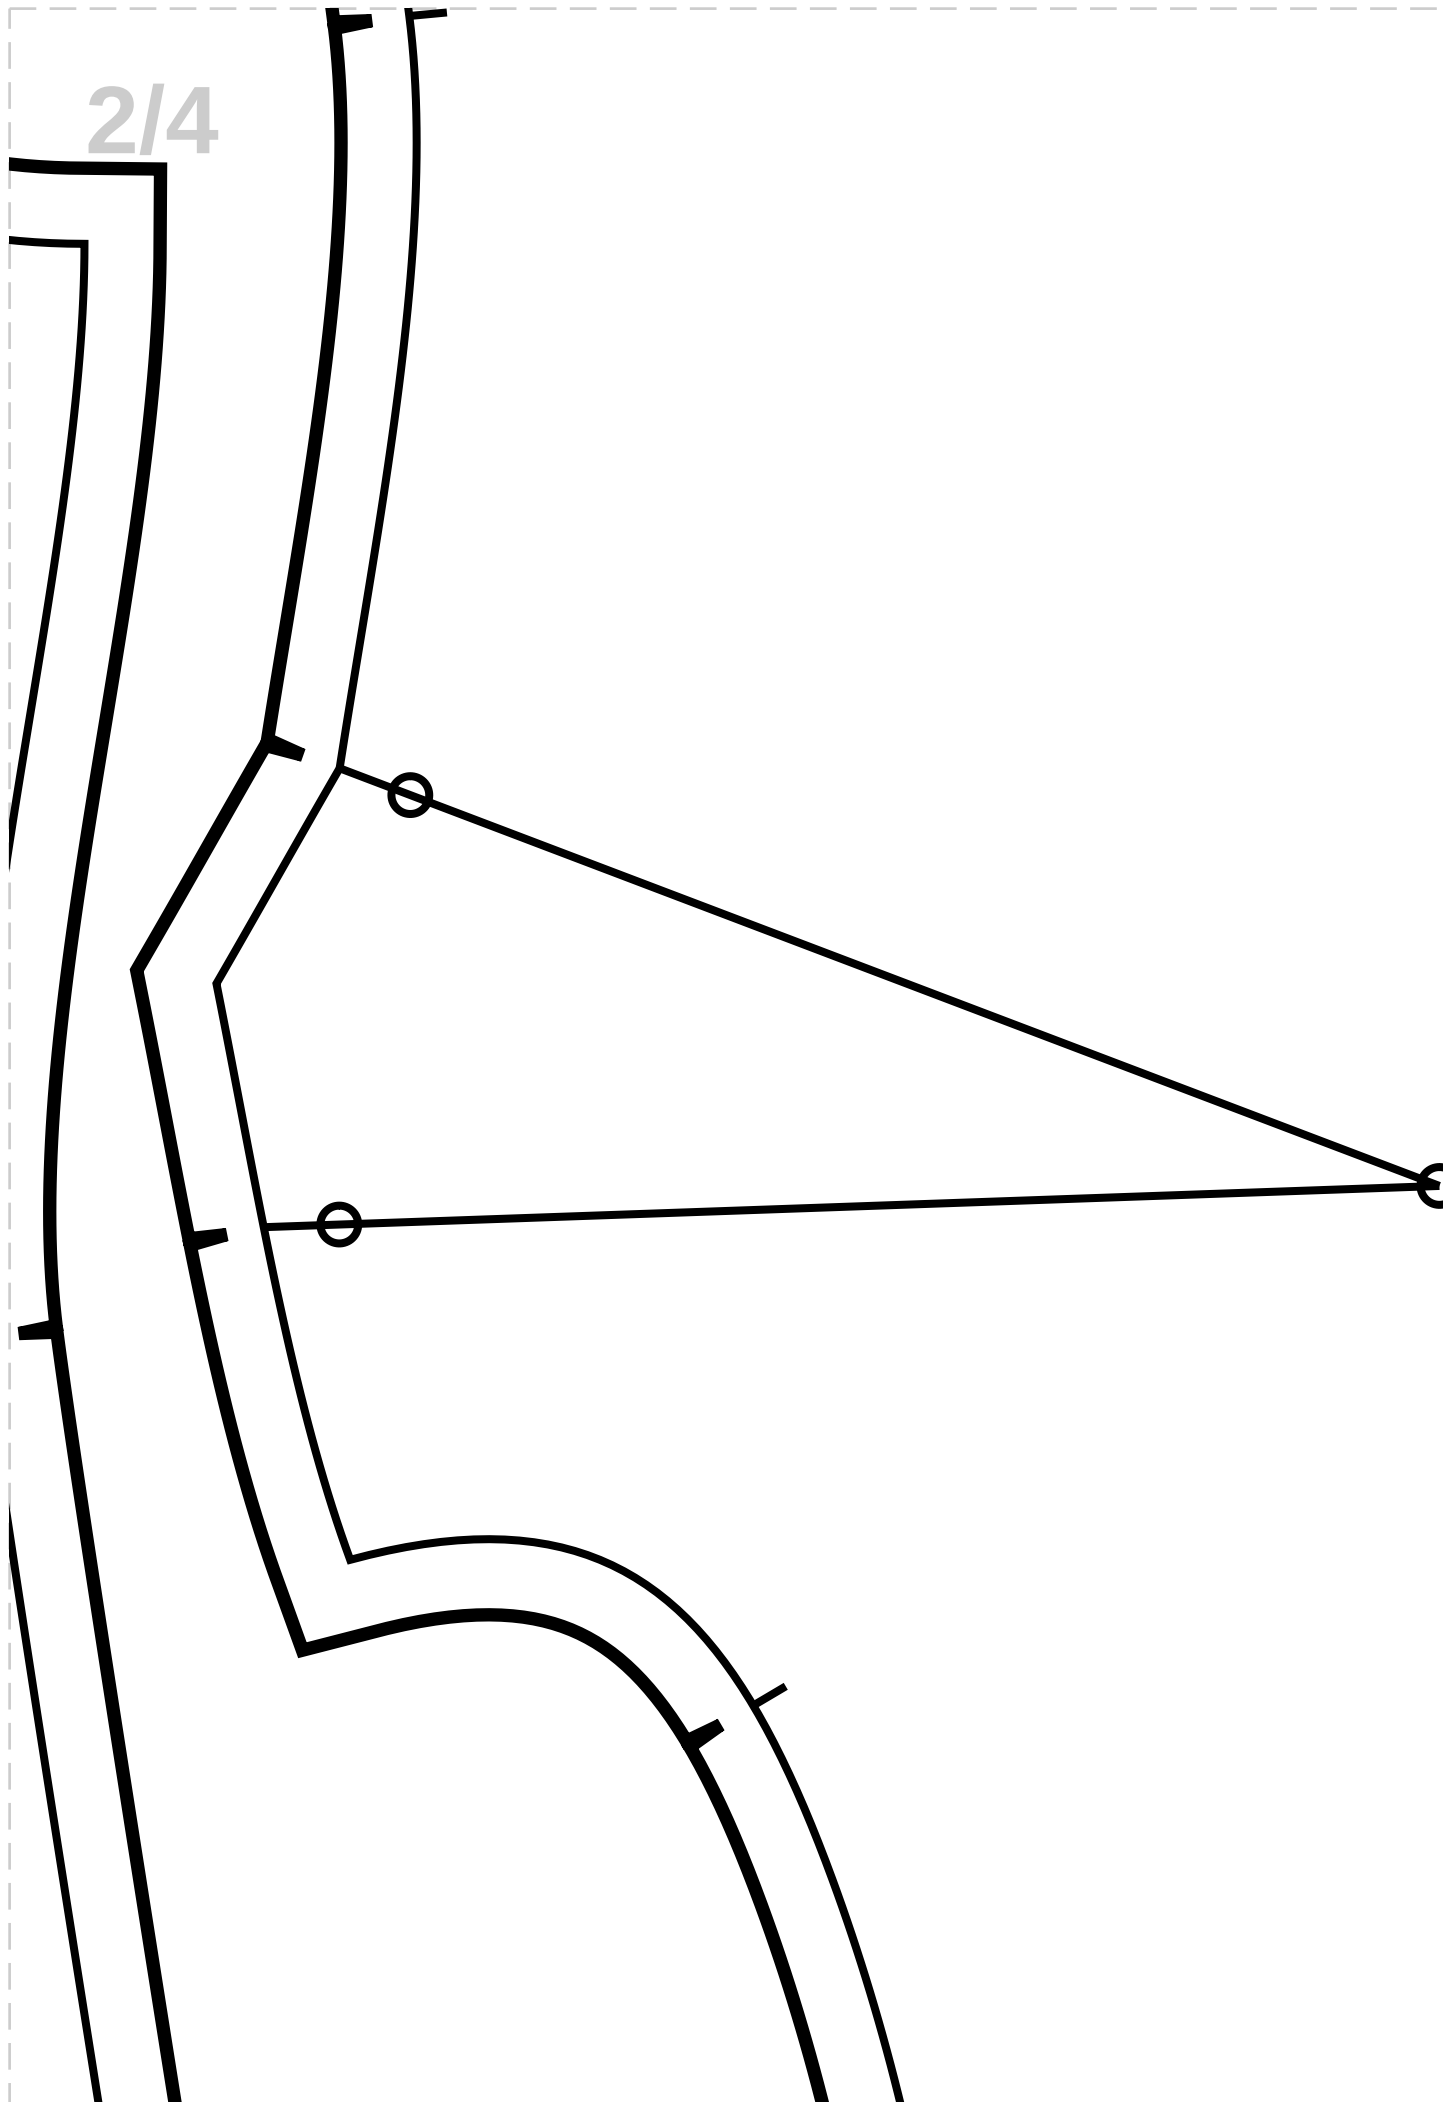


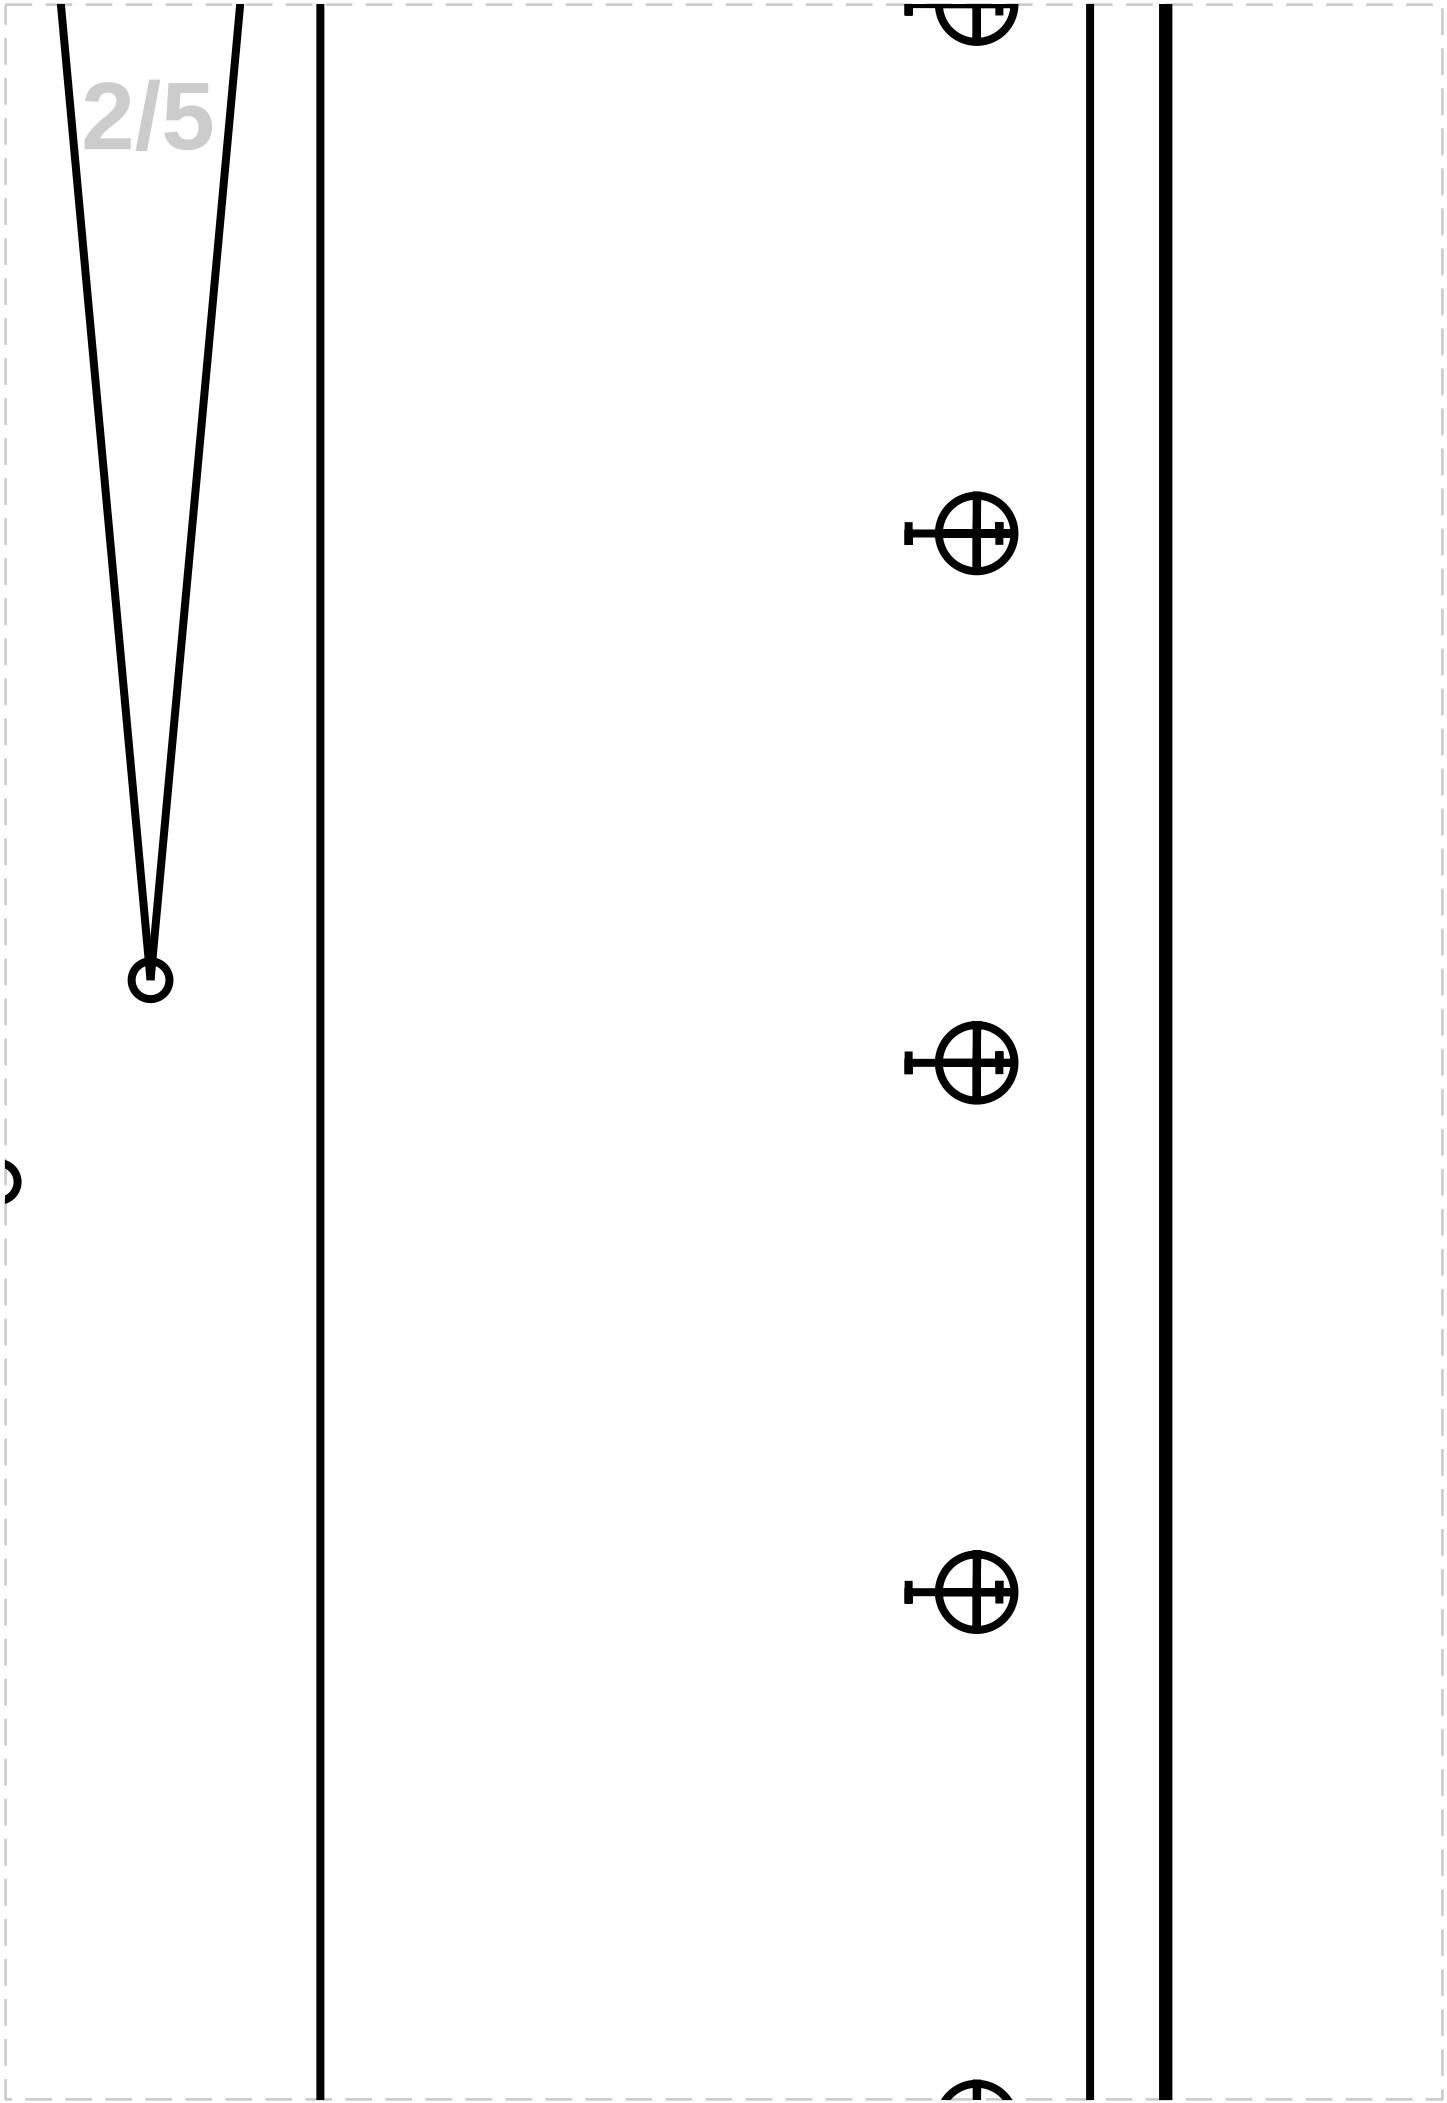

3/1

MAIN

EA

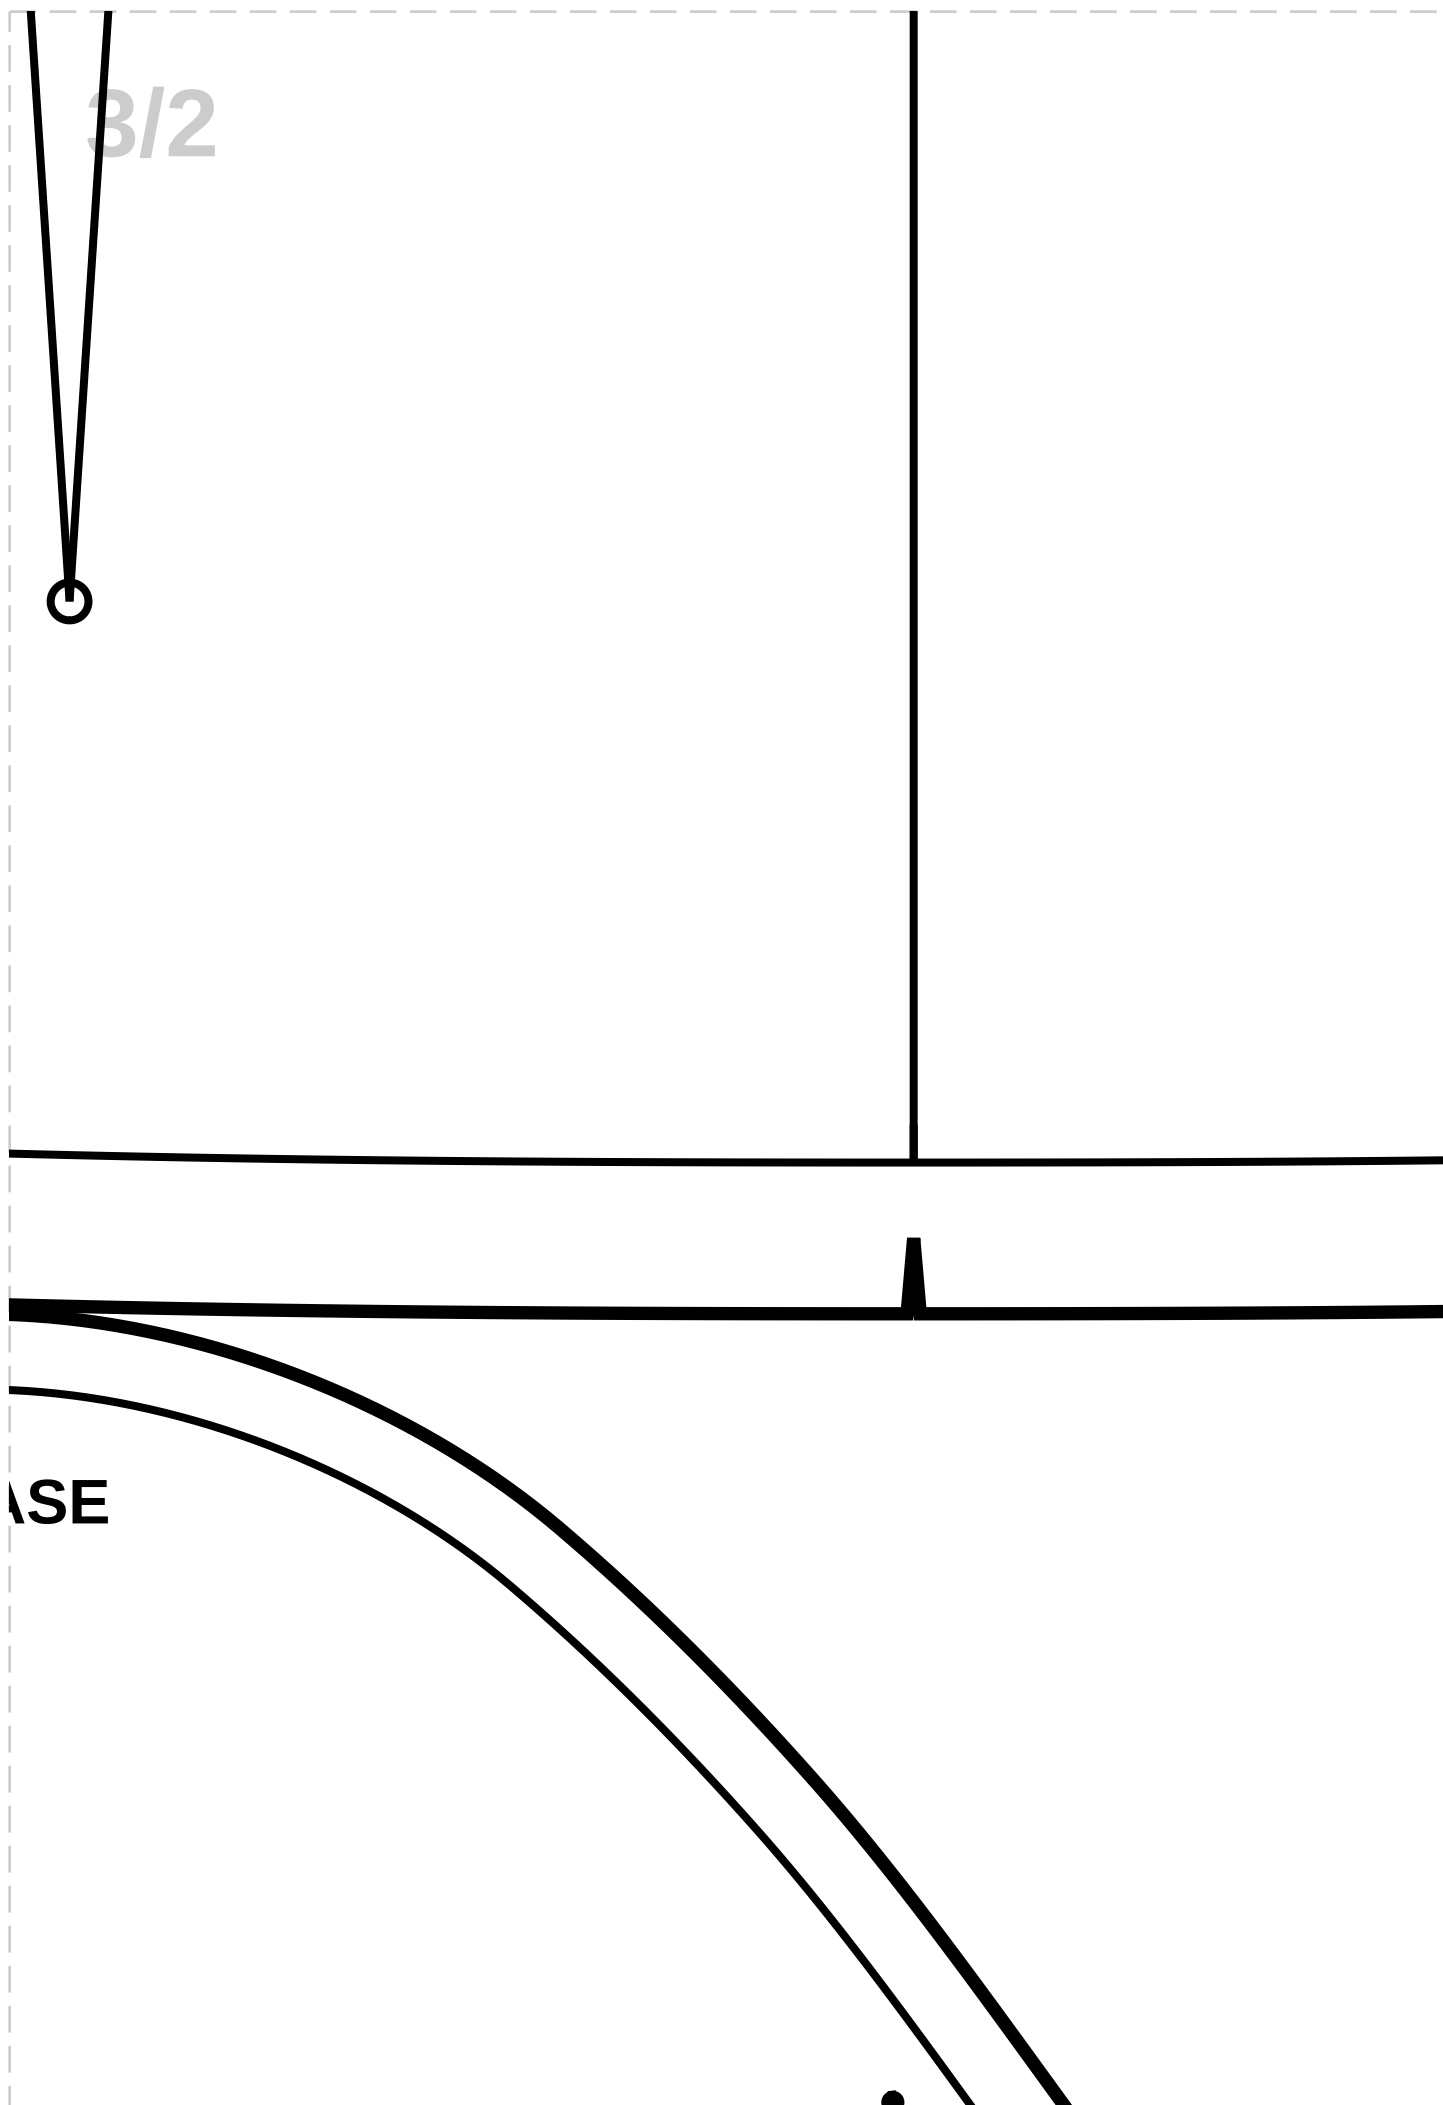


3/3




5

BACK NECK FACING
MAIN FABRIC CUT 1
FUSIBLE INTERFACING CUT 1

3/4



3/5

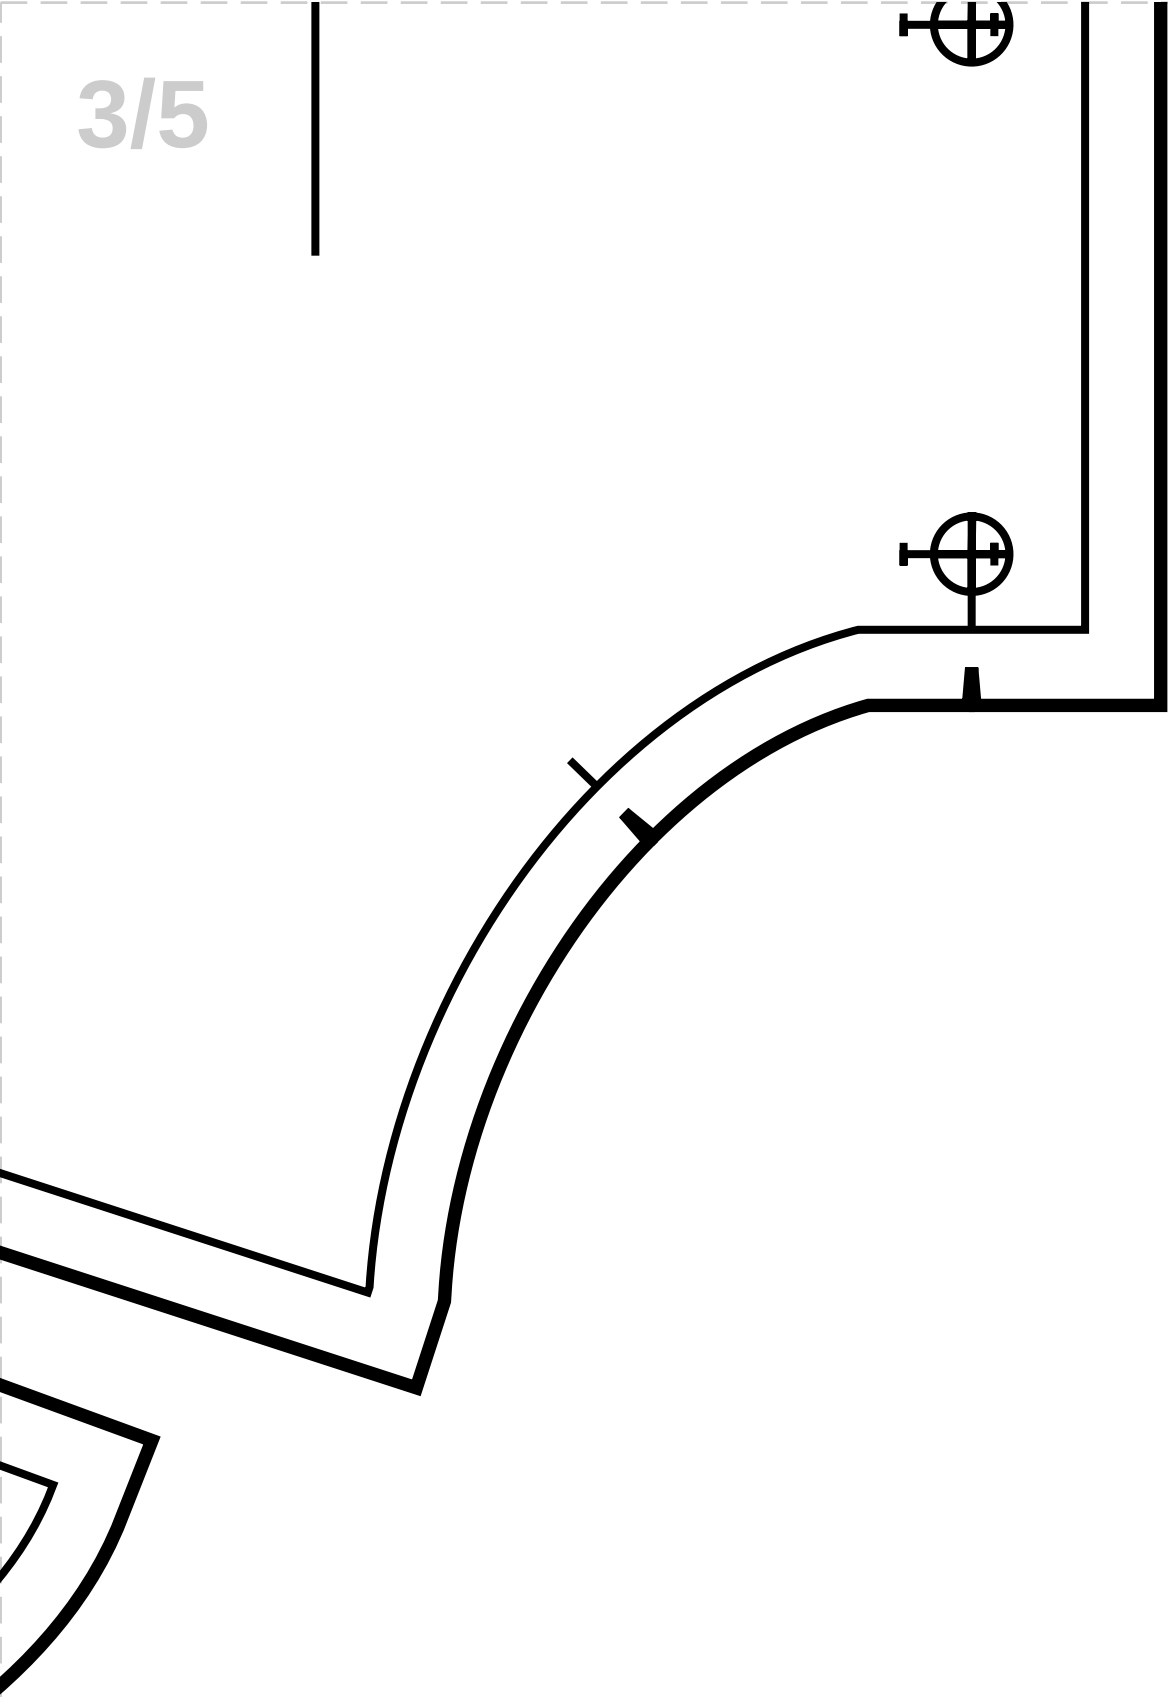


3


SLEEVE

FABRIC: Cut 2

4/1

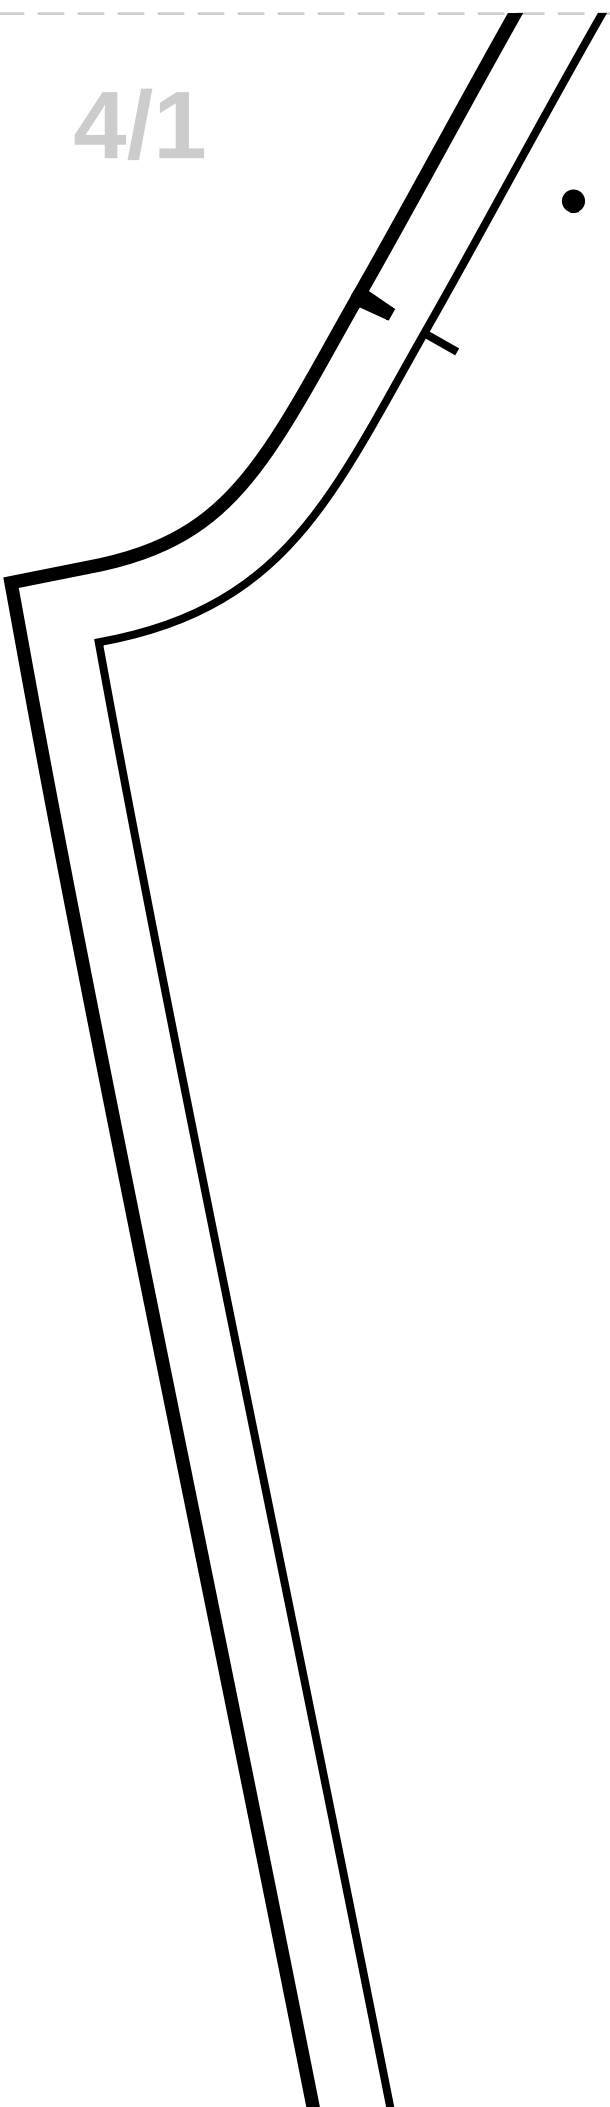

4/2

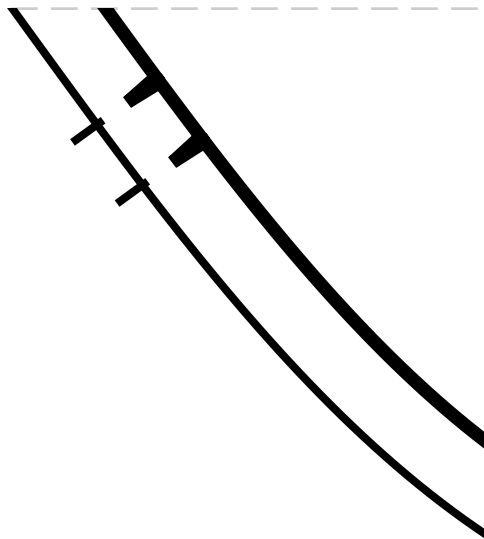


4

FRONT NECK FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2

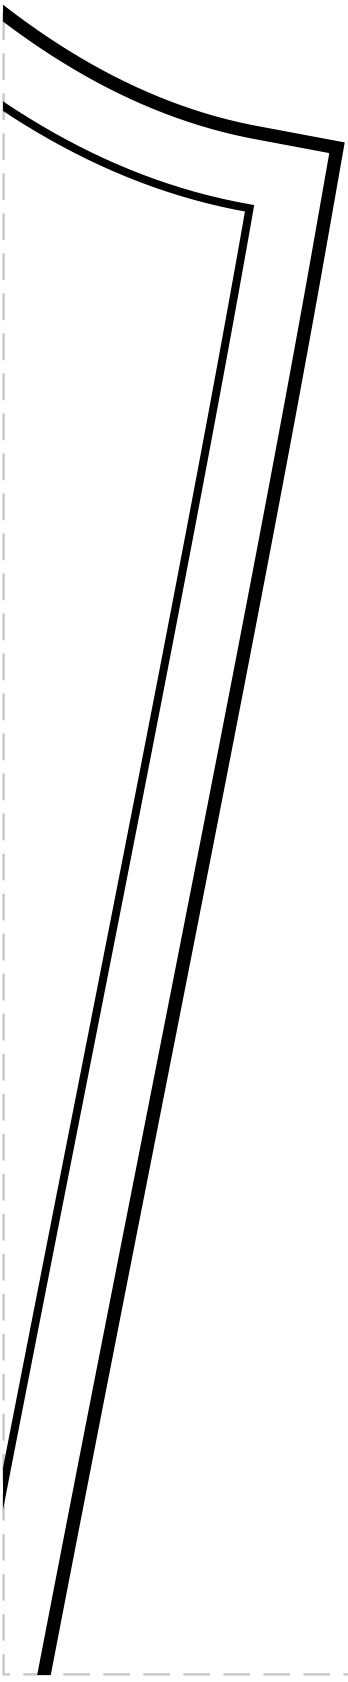

4/4



4/5

5/1

6


COLLAR STAND
MAIN FABRIC: CUT 2
FUSIBLE INTERFACING: CUT 1




5/2



HOLD

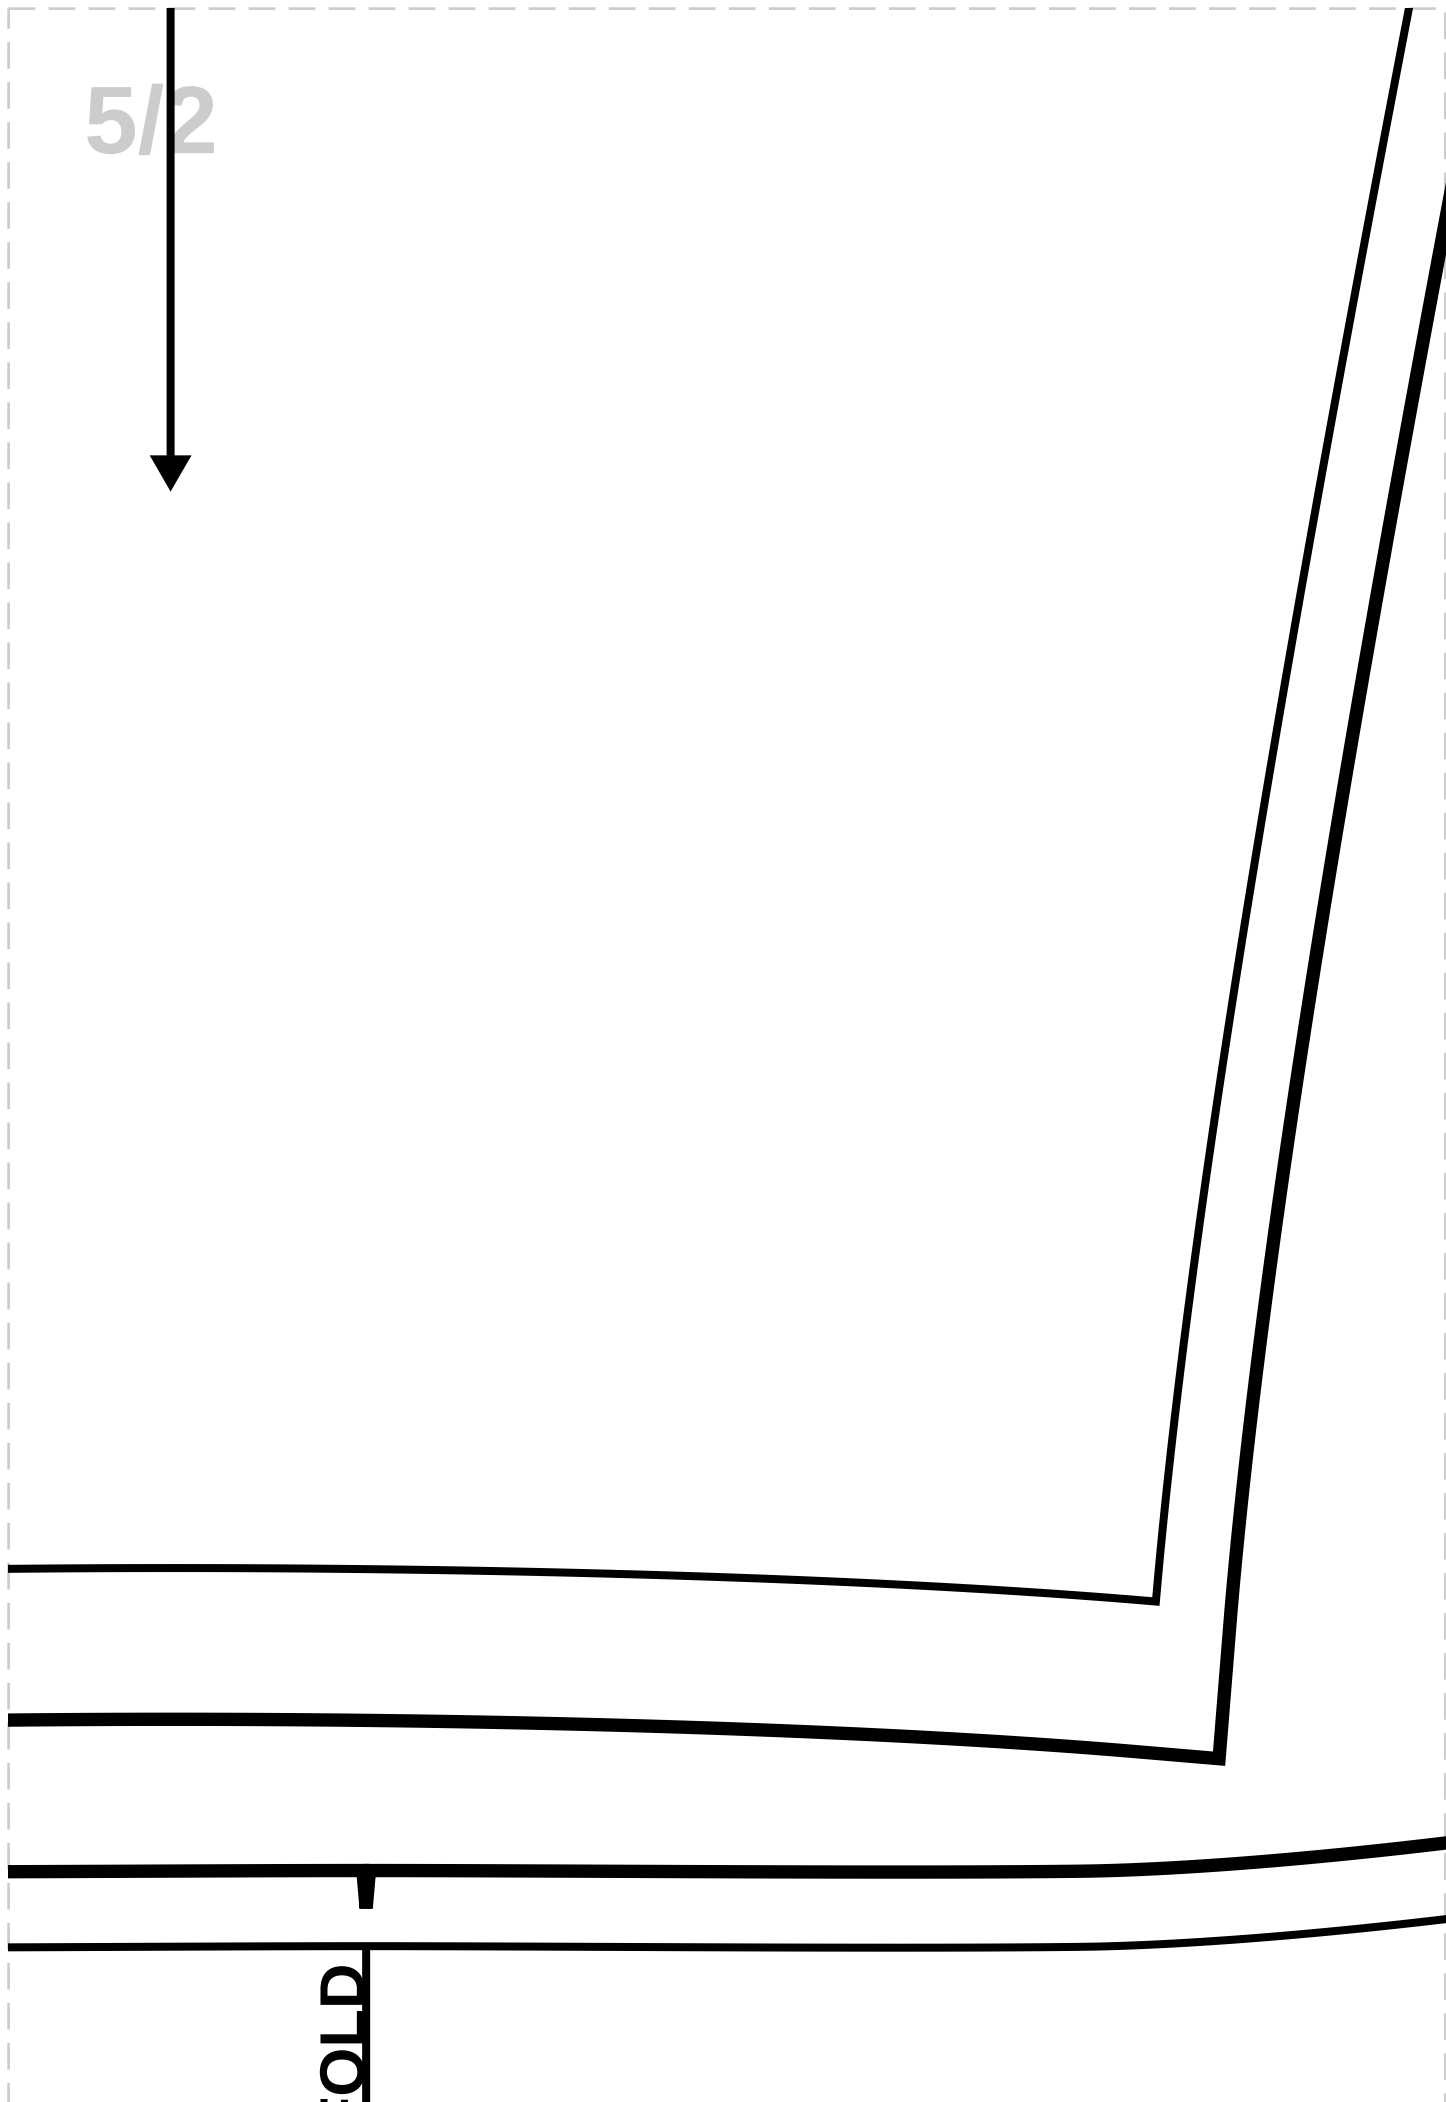

5/3

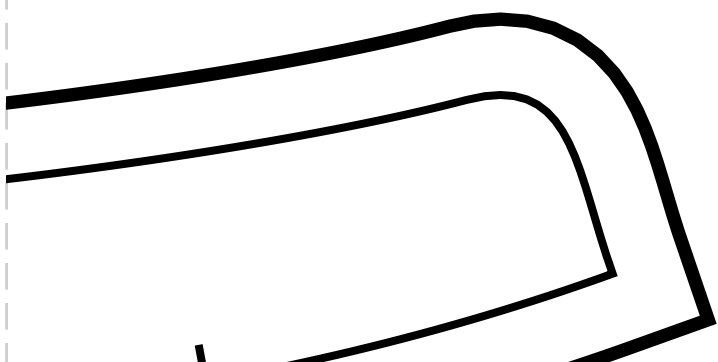


5/4


—

5/5


6/1

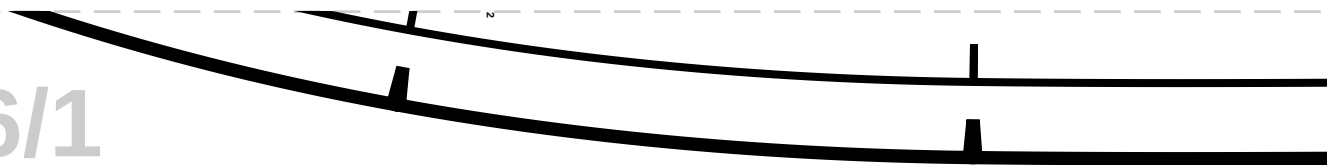

6/2

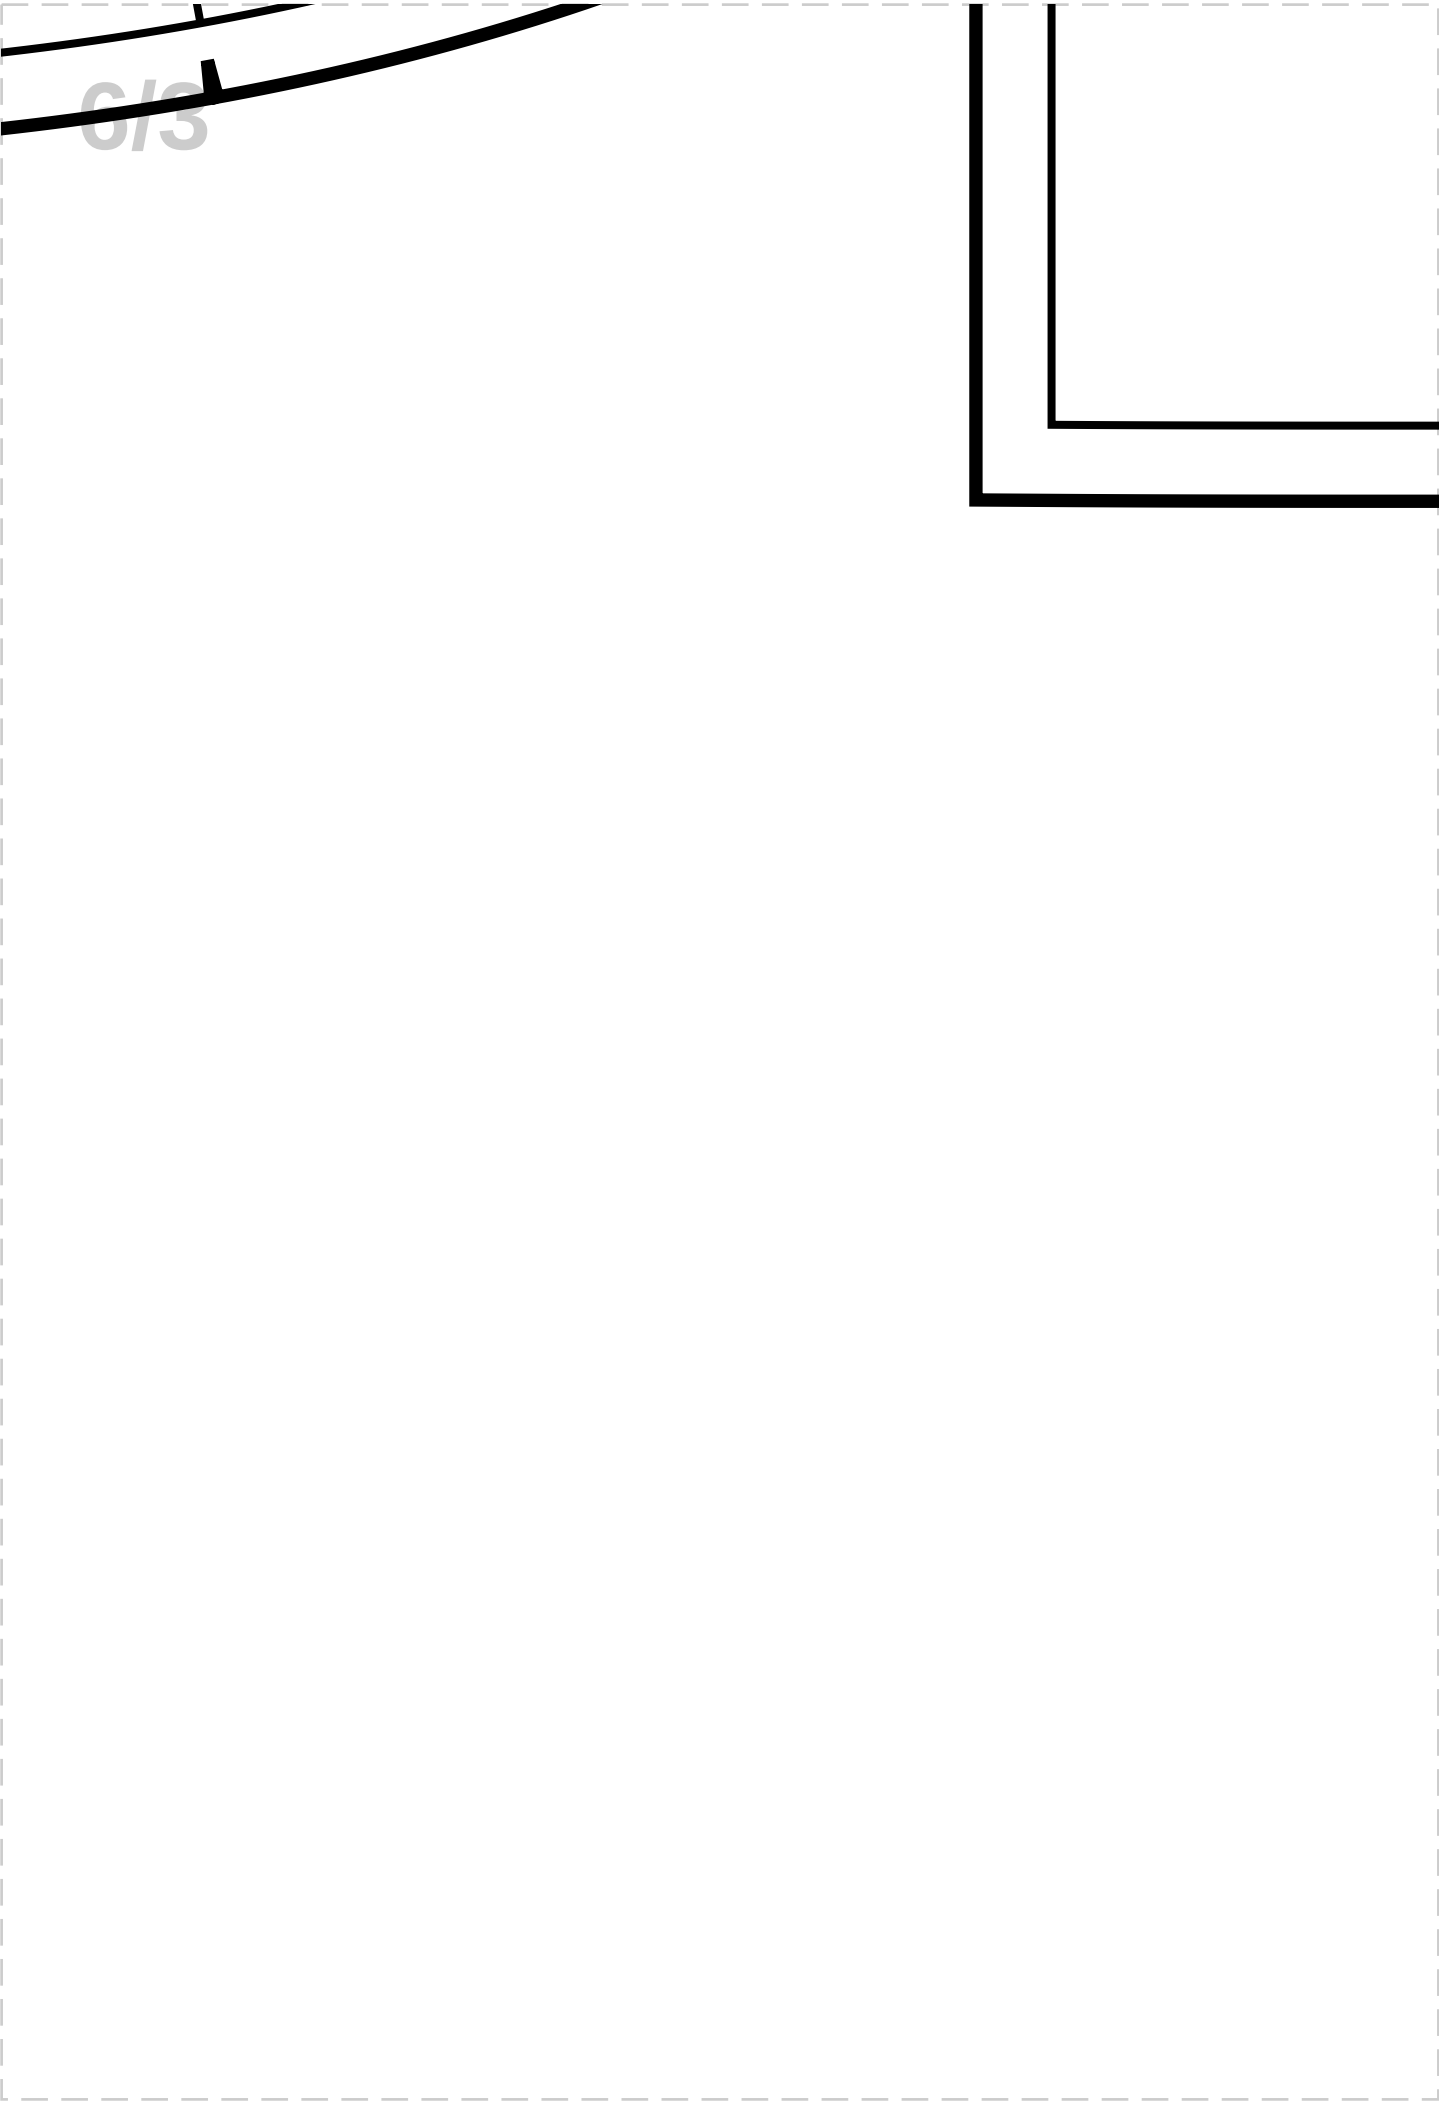

6/4



6/5