

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 95.25, Waist: 78.75, Hips: 102.75

Notes

How to print Printing


Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

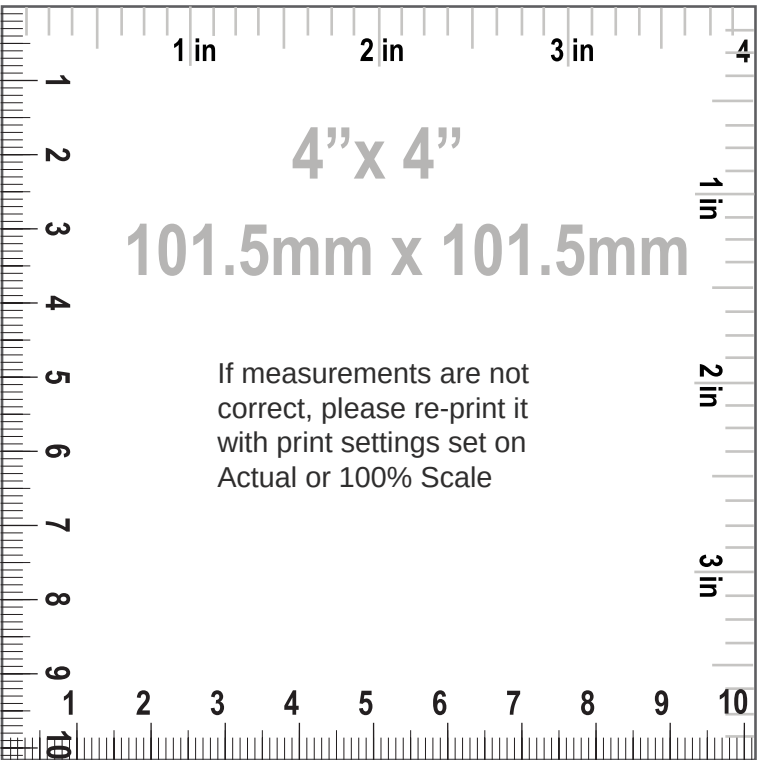

Seam Allowance: 1 (3/8 in)

Pattern pieces:


1. "FRONT", MAIN FABRIC: Cut 2
2. "BACK", MAIN FABRIC: Cut 1
3. "SLEEVE", MAIN FABRIC: Cut 2
4. "FRONT NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2
5. "BACK NECK FACING", MAIN FABRIC, FUSIBLE INTERFACING: Cut 1
6. "COLLAR STAND", MAIN FABRIC, FUSIBLE INTERFACING: Cut 2

Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Seam allowance p max 1.50 none (5/8 in)
4. Stretch factor 1.00 none (3/8 in)
5. Stretch factor horizontal 1.00 none (3/8 in)
6. Stretch factor vertical 1.00 none (3/8 in)
7. Front neck drop 8.66 cm (3 3/8 in)
8. Button diameter 1.00 cm (3/8 in)
9. Front buttons quantity 8.00 pc
10. Across chest 50.38 cm (19 7/8 in)
11. Waist 41.54 cm (16 3/8 in)
12. Hips 56.01 cm (22 in)
13. Front length from HPS to hem 68.74 cm (27 1/8 in)
14. Center front length to hem 60.28 cm (23 3/4 in)
15. Center back length to hem 65.17 cm (25 5/8 in)
16. Across front 36.13 cm (14 1/4 in)
17. Across back 35.11 cm (13 7/8 in)
18. Across shoulders 40.20 cm (15 7/8 in)
19. Side seam 39.64 cm (15 5/8 in)
20. Hemline sweep 55.47 cm (21 7/8 in)
21. Armhole length front 23.71 cm (9 3/8 in)
22. Armhole length back 27.74 cm (10 7/8 in)
23. Neck opening 15.37 cm (6 in)
24. Neckline length 43.48 cm (17 1/8 in)
25. Back neck drop 3.65 cm (1 3/8 in)


- 26. Shoulder width 12.14 cm (4 3/4 in)
- 27. Bust dart to bust dart 24.03 cm (9 1/2 in)
- 28. Sleeve length 58.11 cm (22 7/8 in)
- 29. Sleeve upper arm width 33.66 cm (13 1/4 in)
- 30. Sleeve opening 24.79 cm (9 3/4 in)
- 31. Sleeve cap length 52.68 none (20 3/4 in)
- 32. Stand height 3.00 cm (1 1/8 in)
- 33. Collar length 43.47 cm (17 1/8 in)


Paper Size: LETTER;
Print Actual Size (100% Scale);

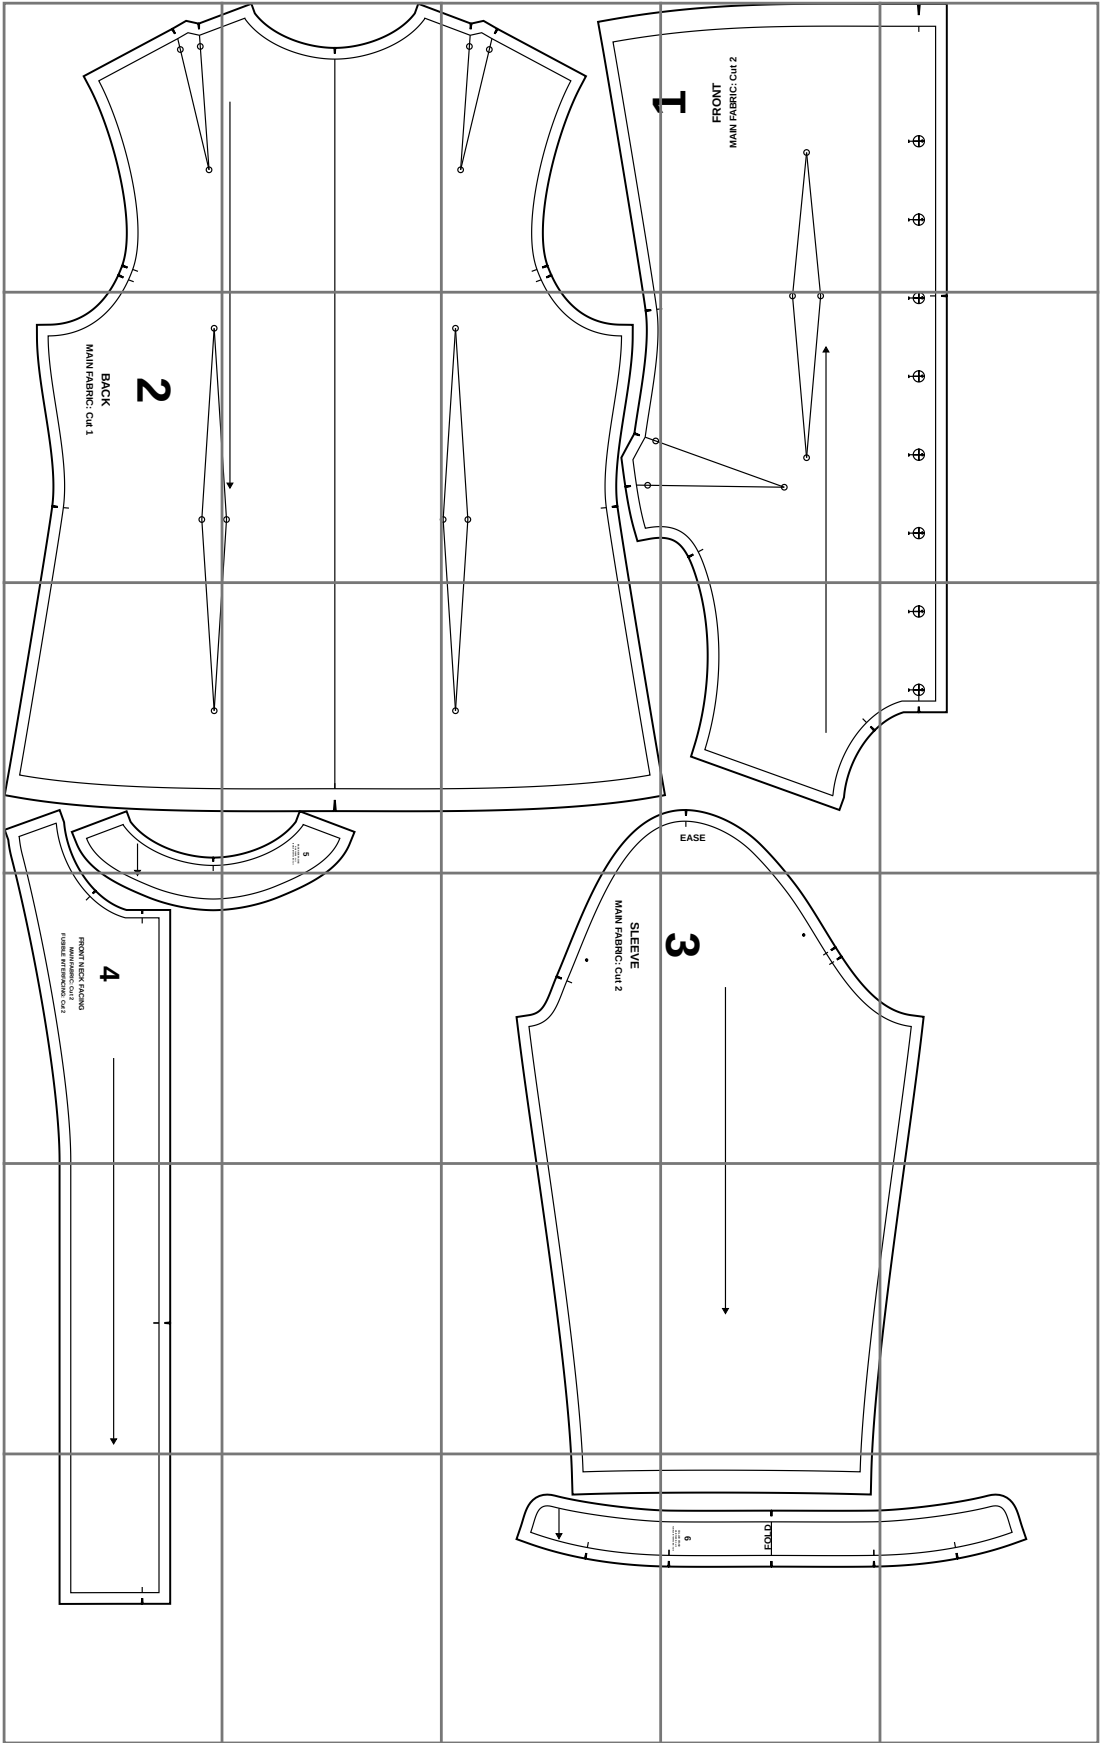

1/1

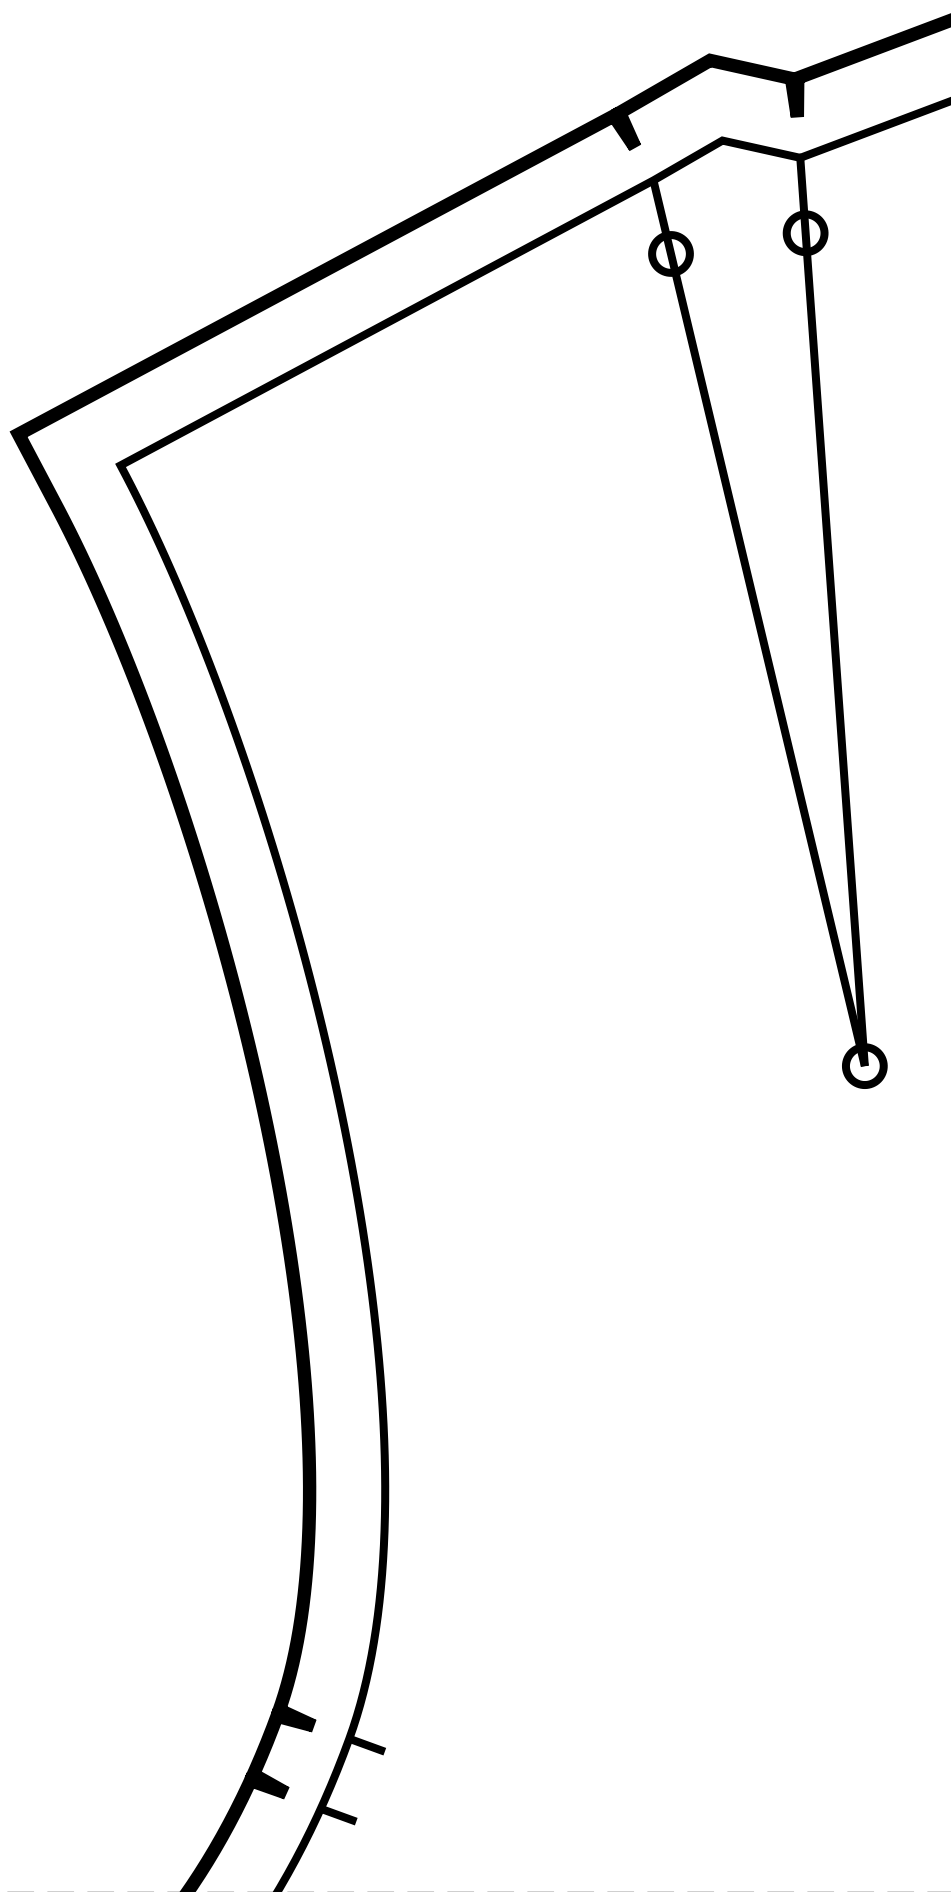

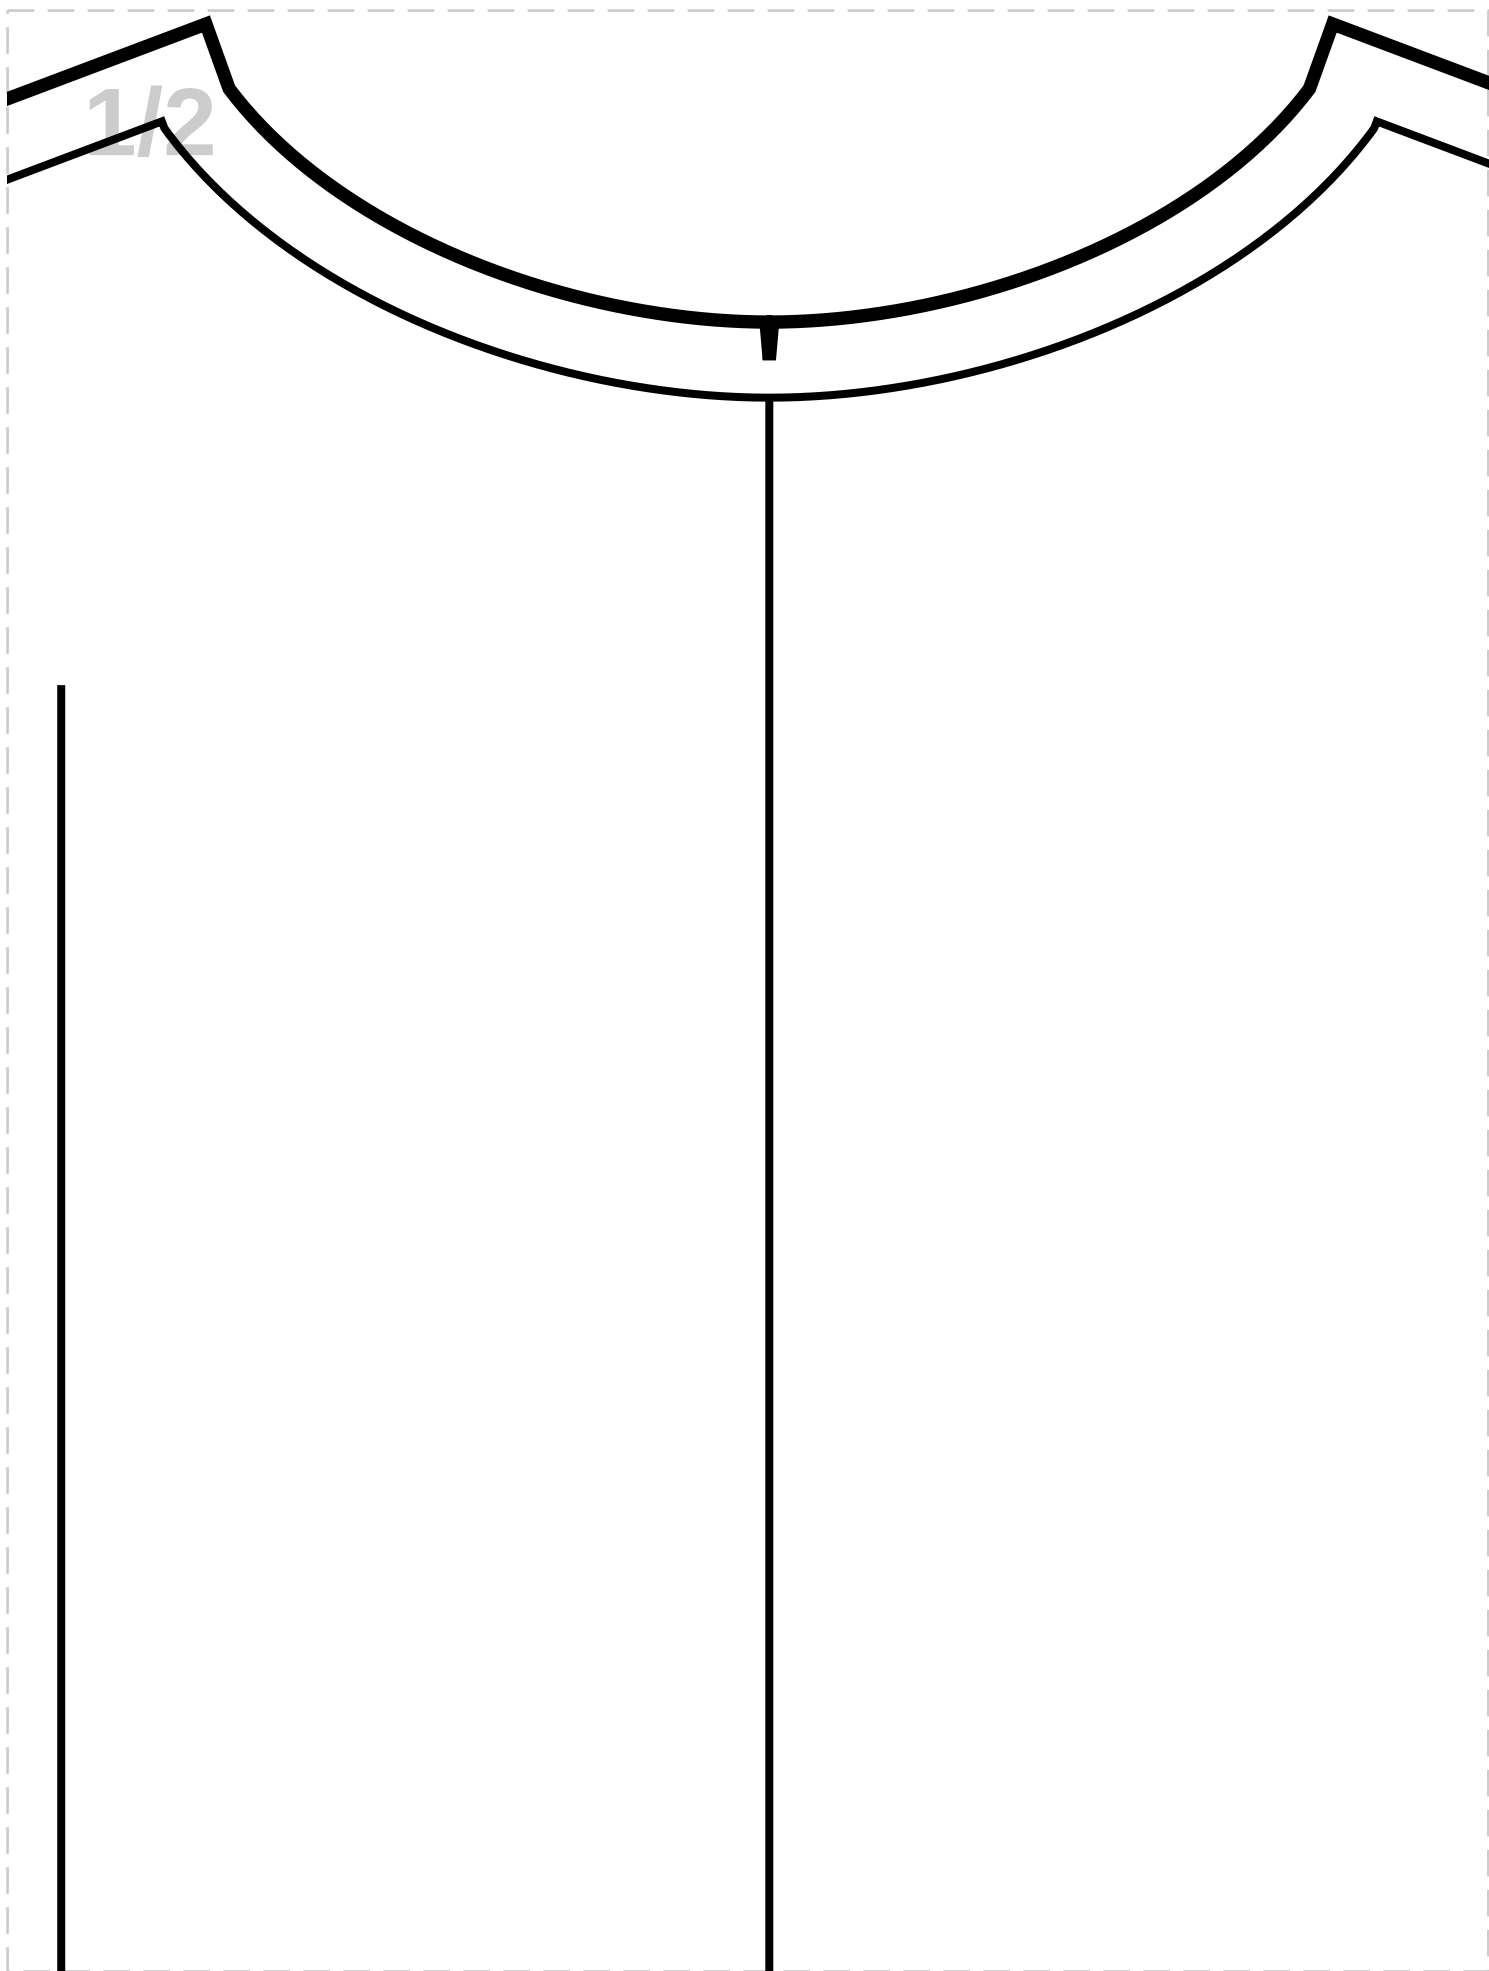

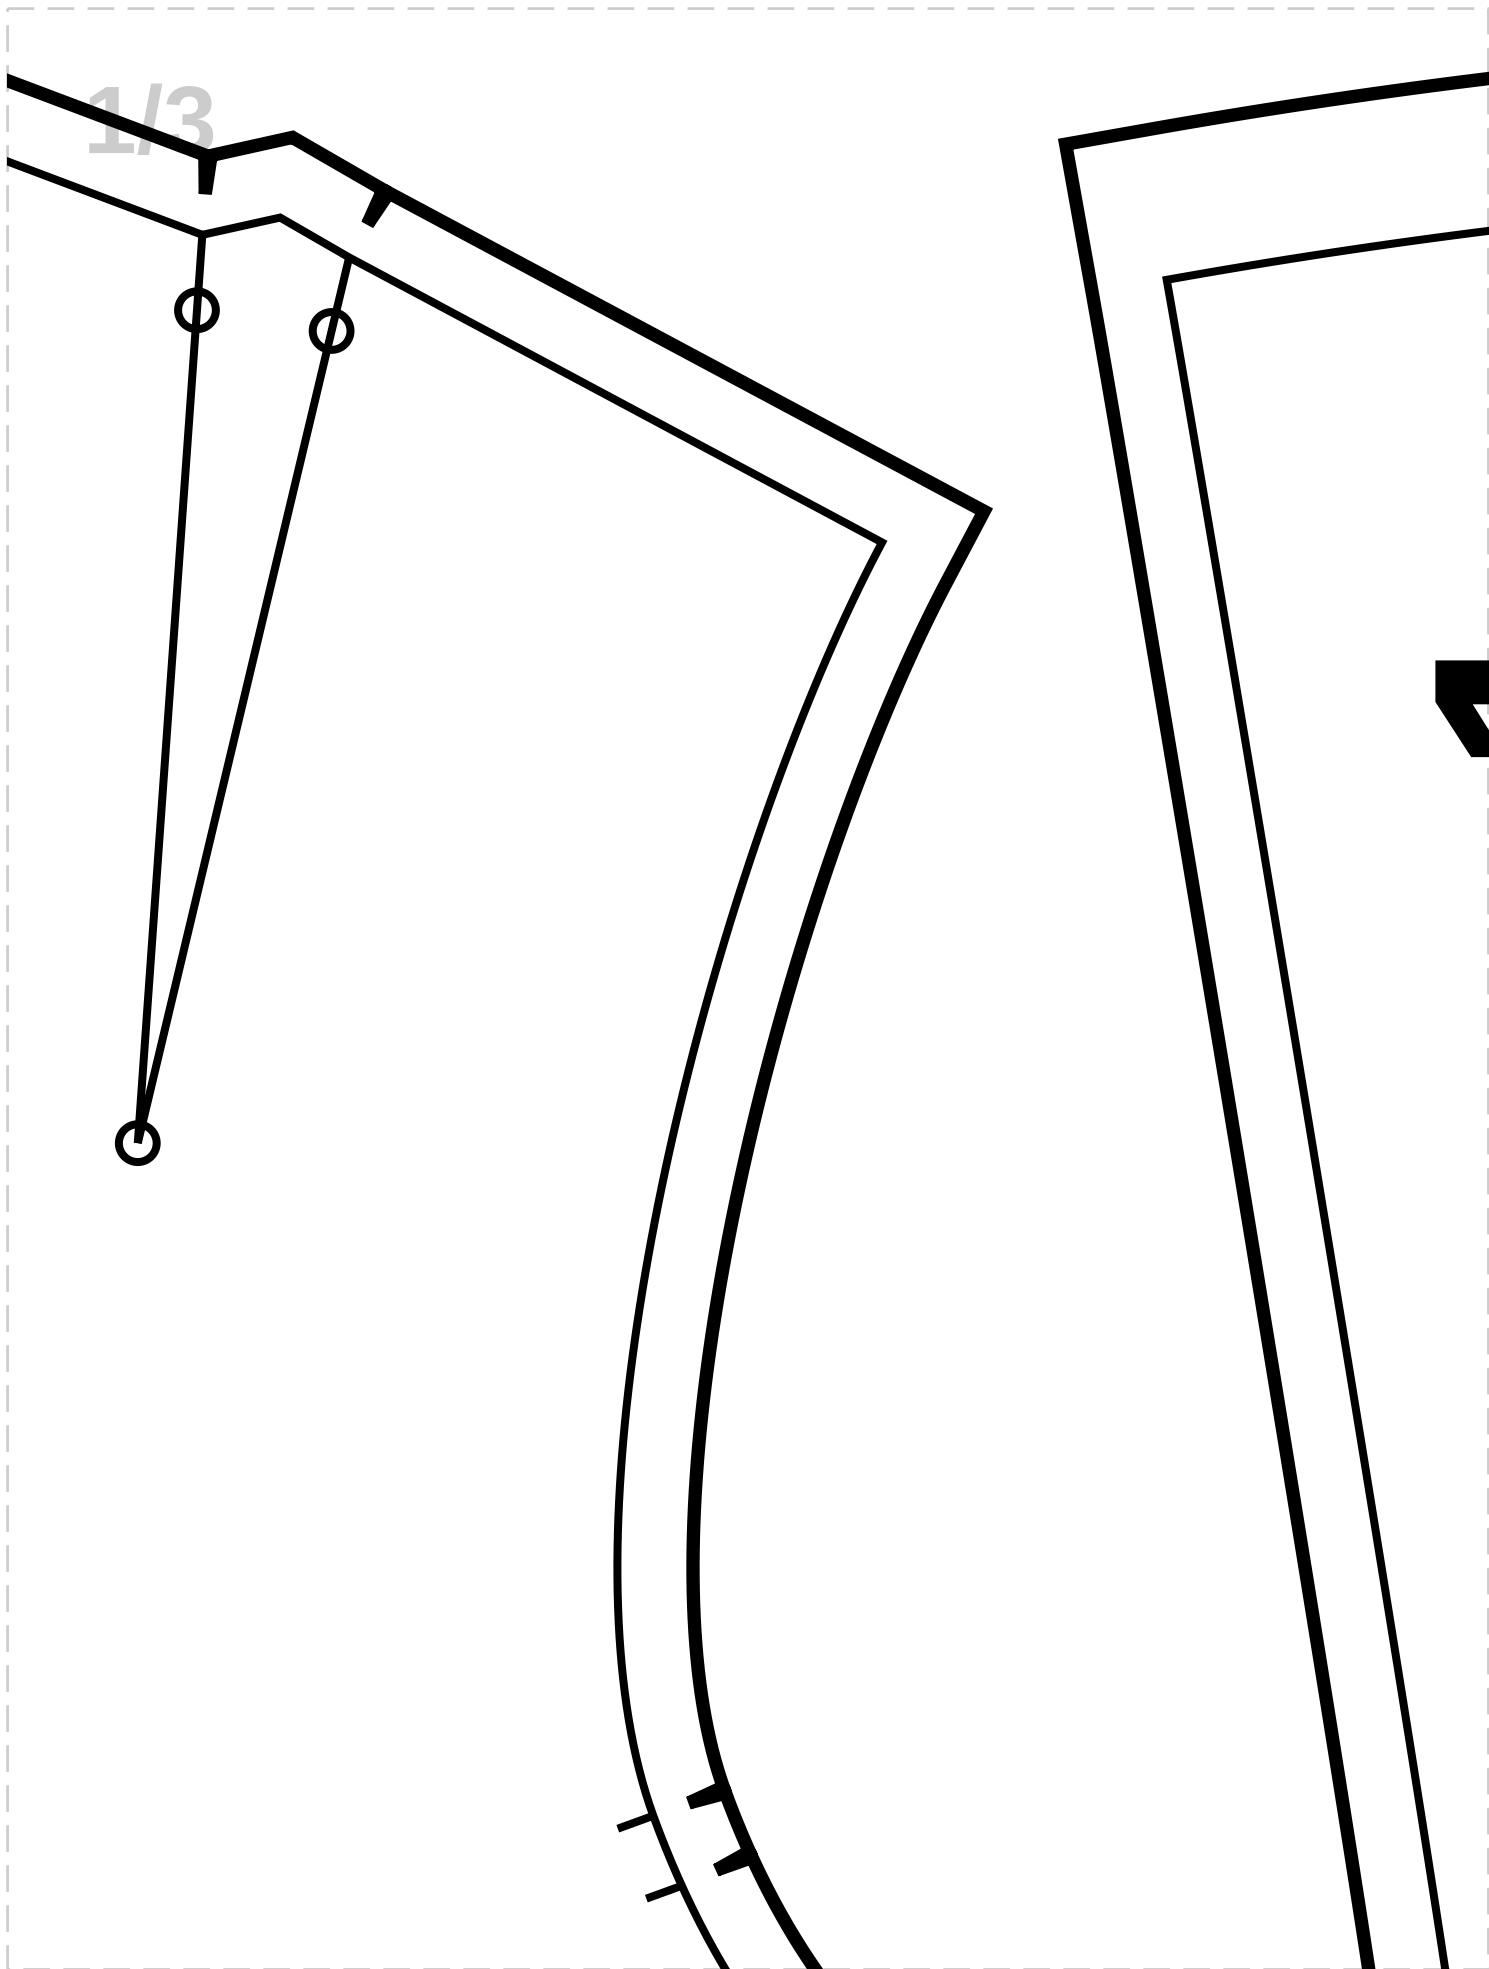


T

1/4

FRONT

MAIN FABRIC: Cut 2

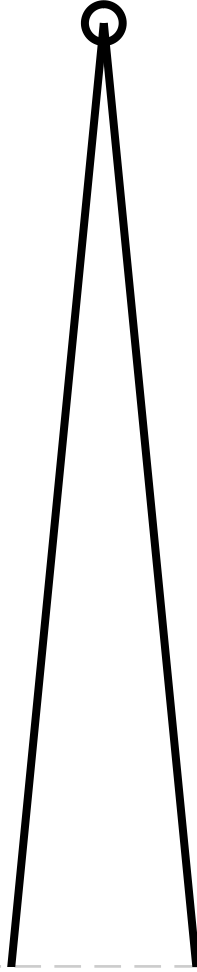

1/5






2

BACK

MAIN FABRIC: Cut 1



2/1

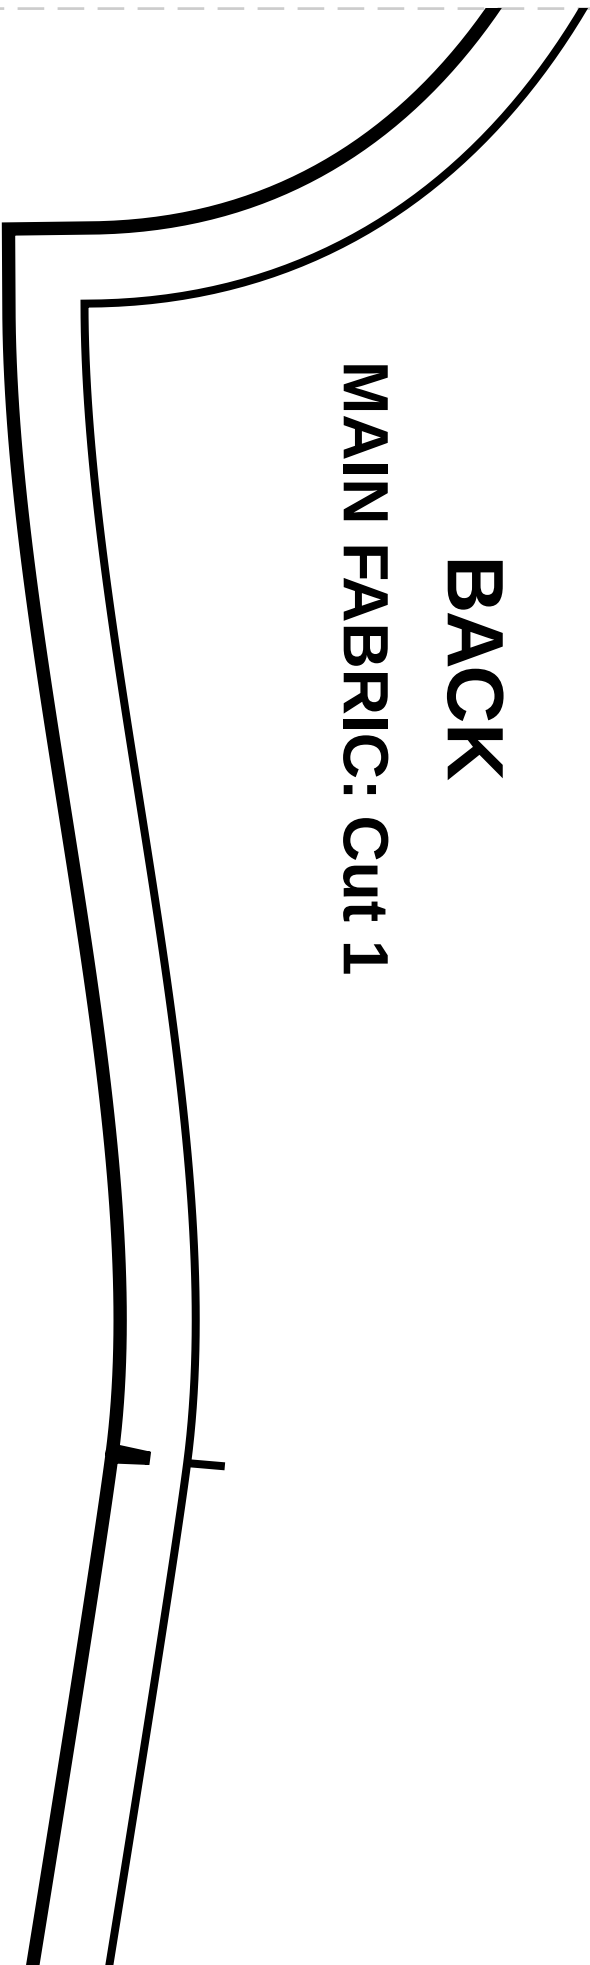


2/2



2/3

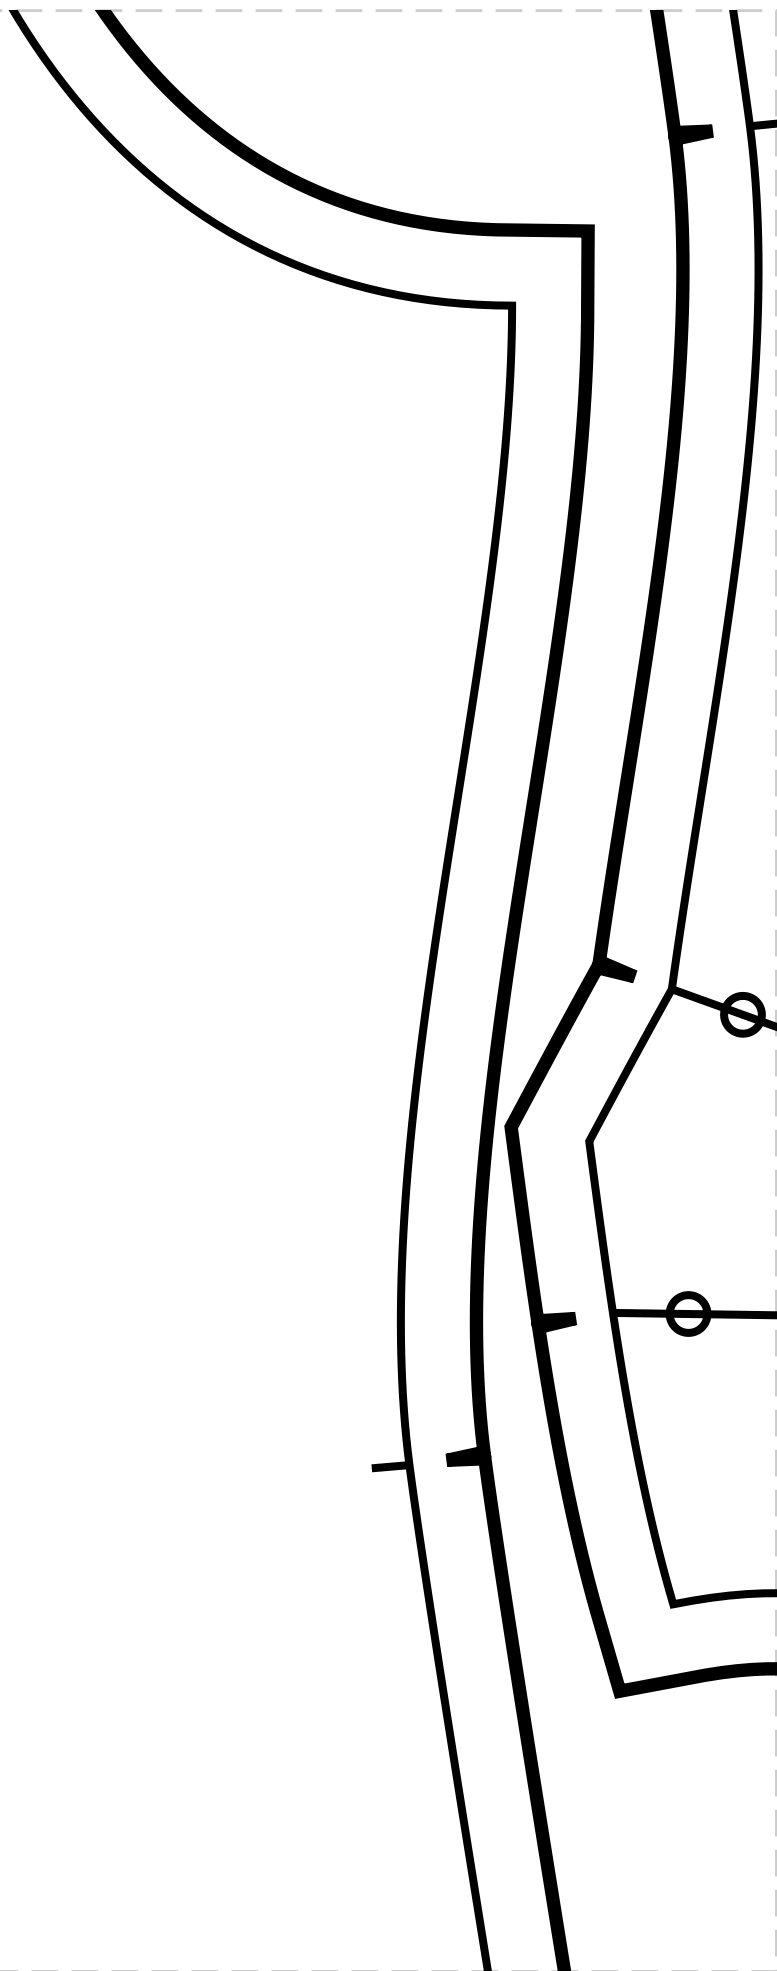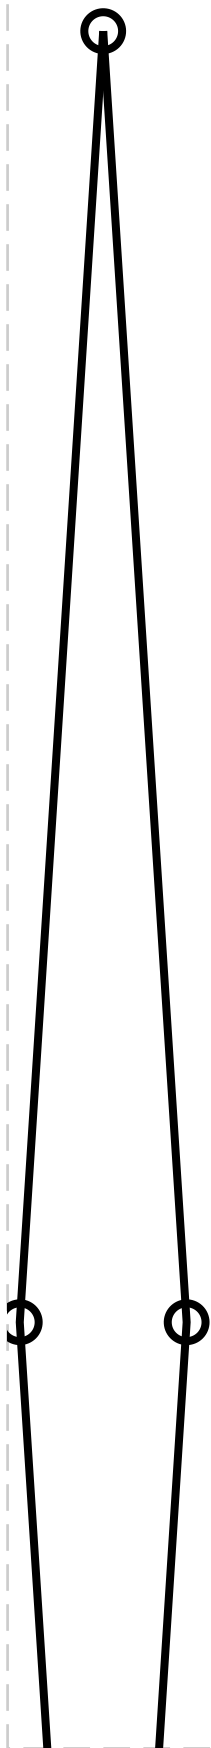


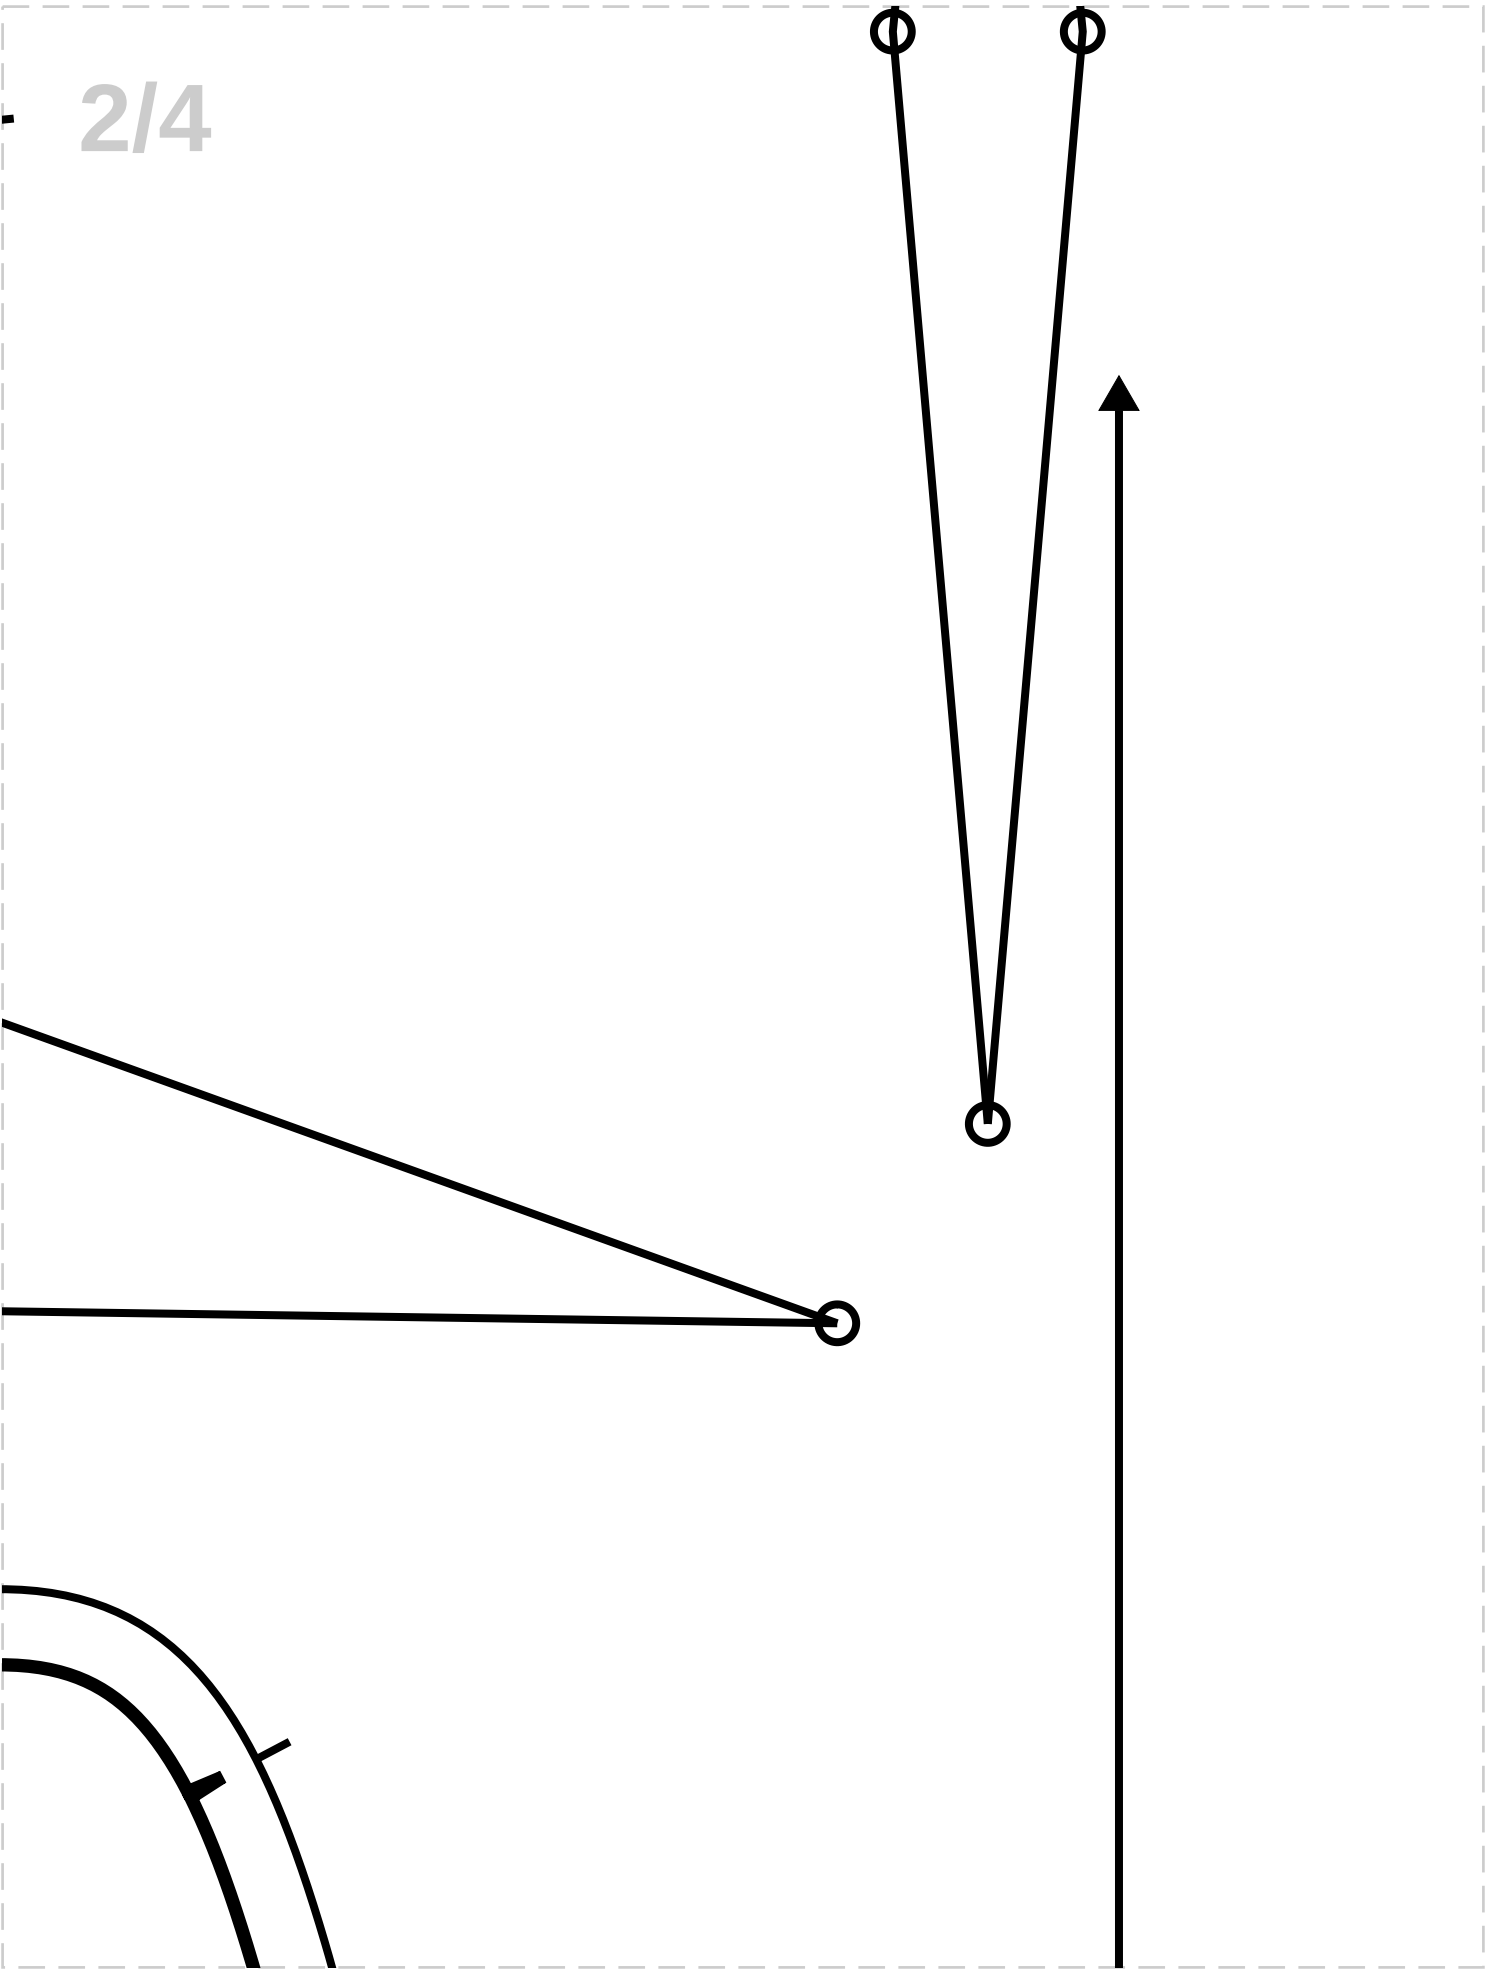

2/5



3/1

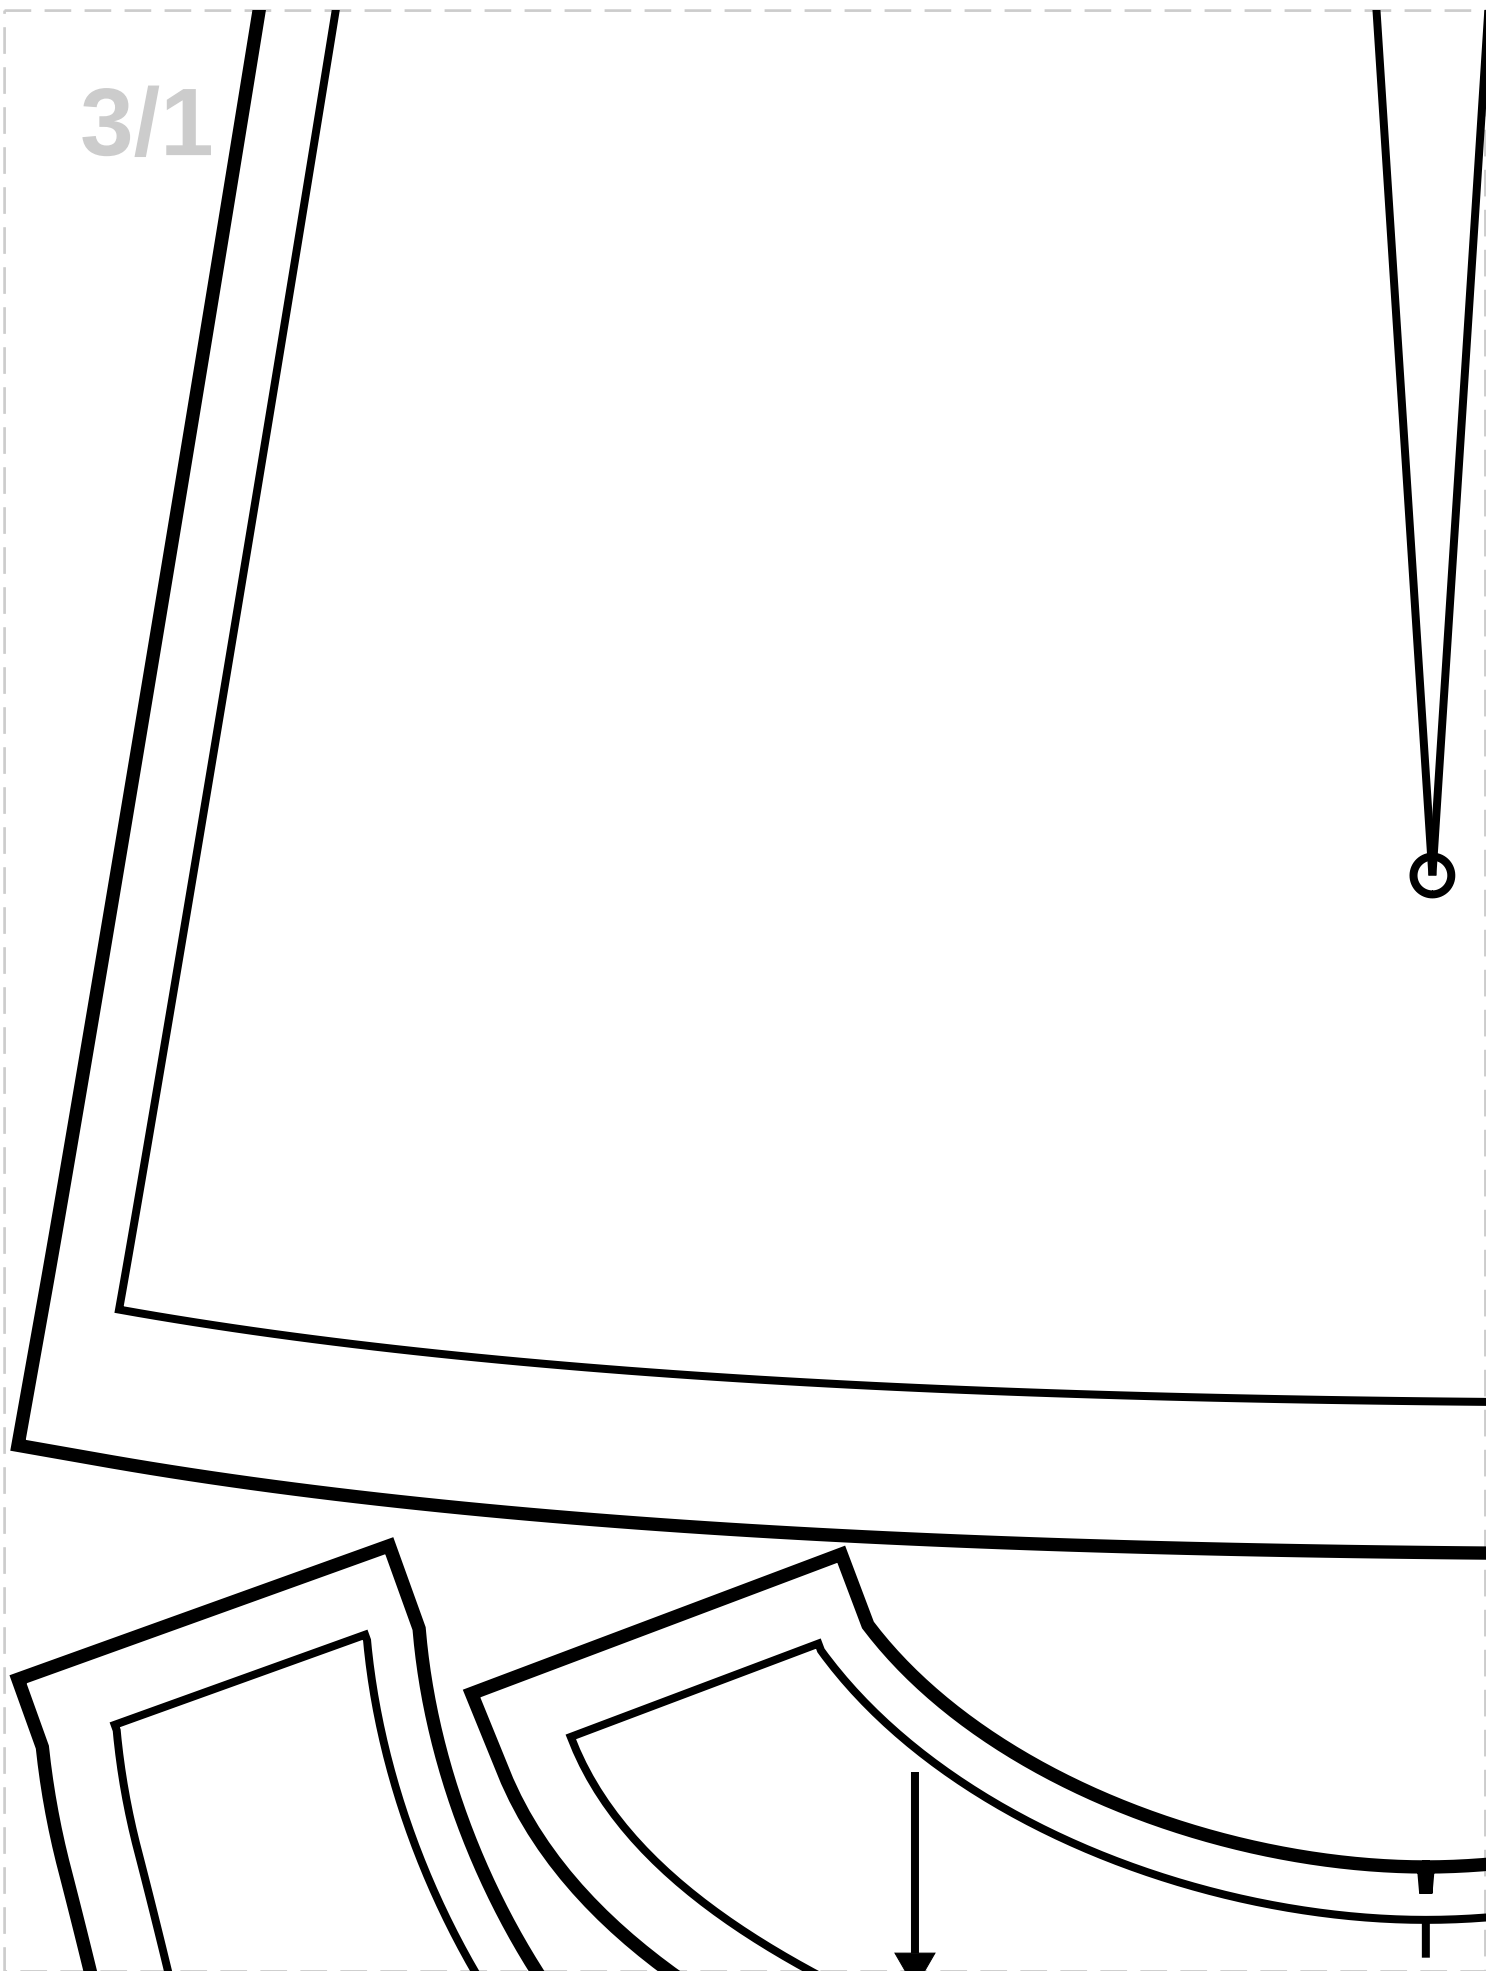


3/2

BACK NECK FACING
MAIN FABRIC: CUT 1
FUSIBLE INTERFACING: CUT 1


5

3/3

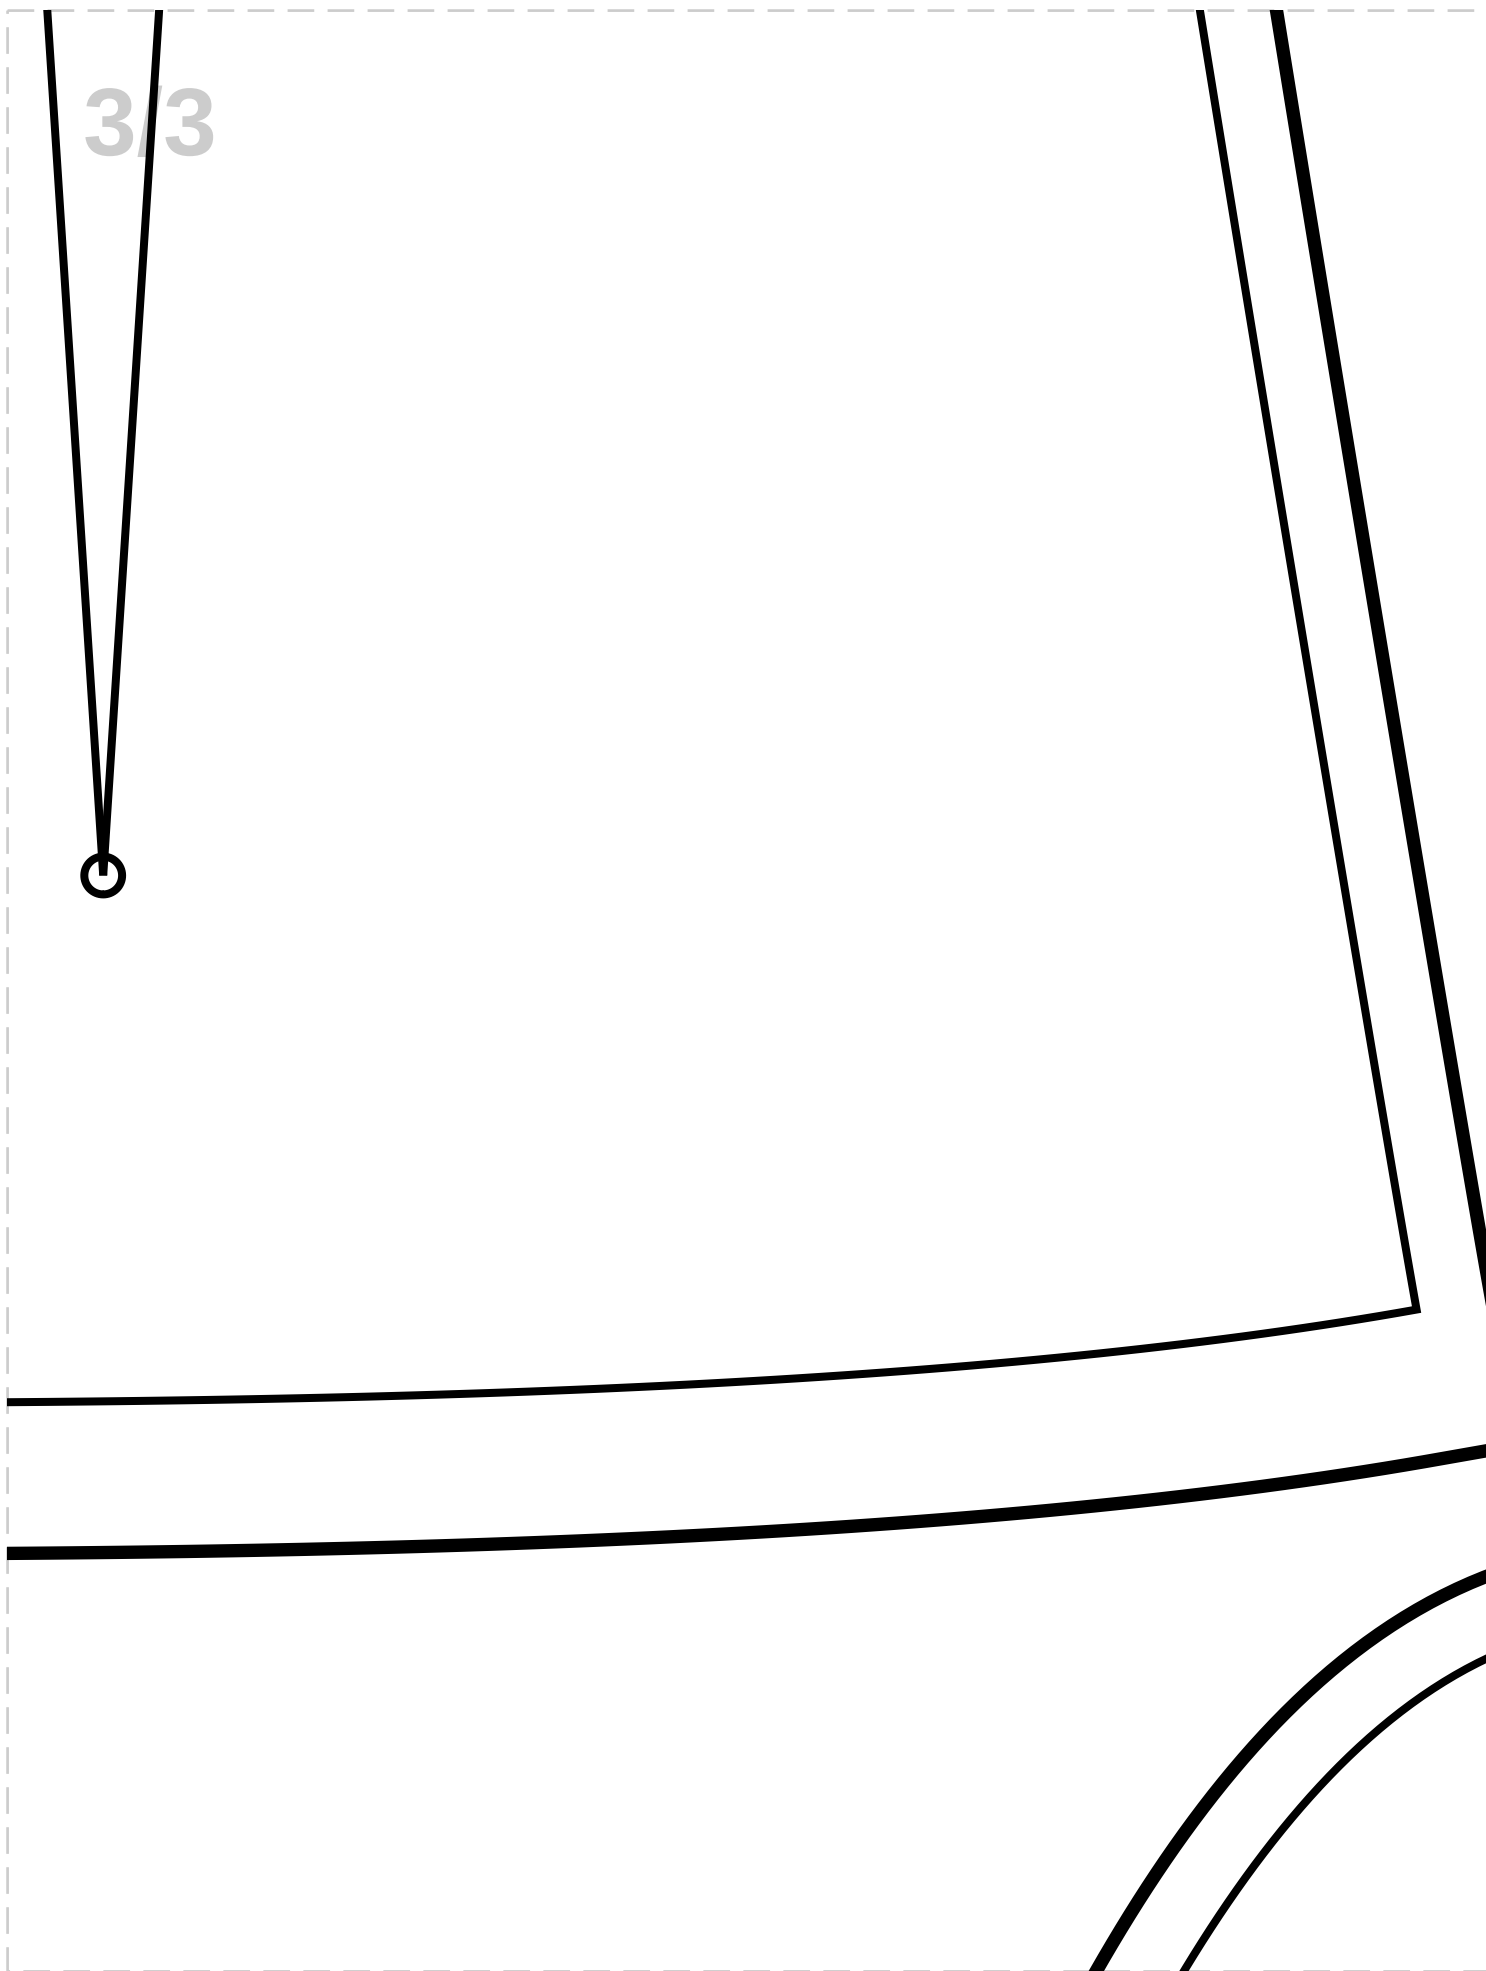



3/4

EASE

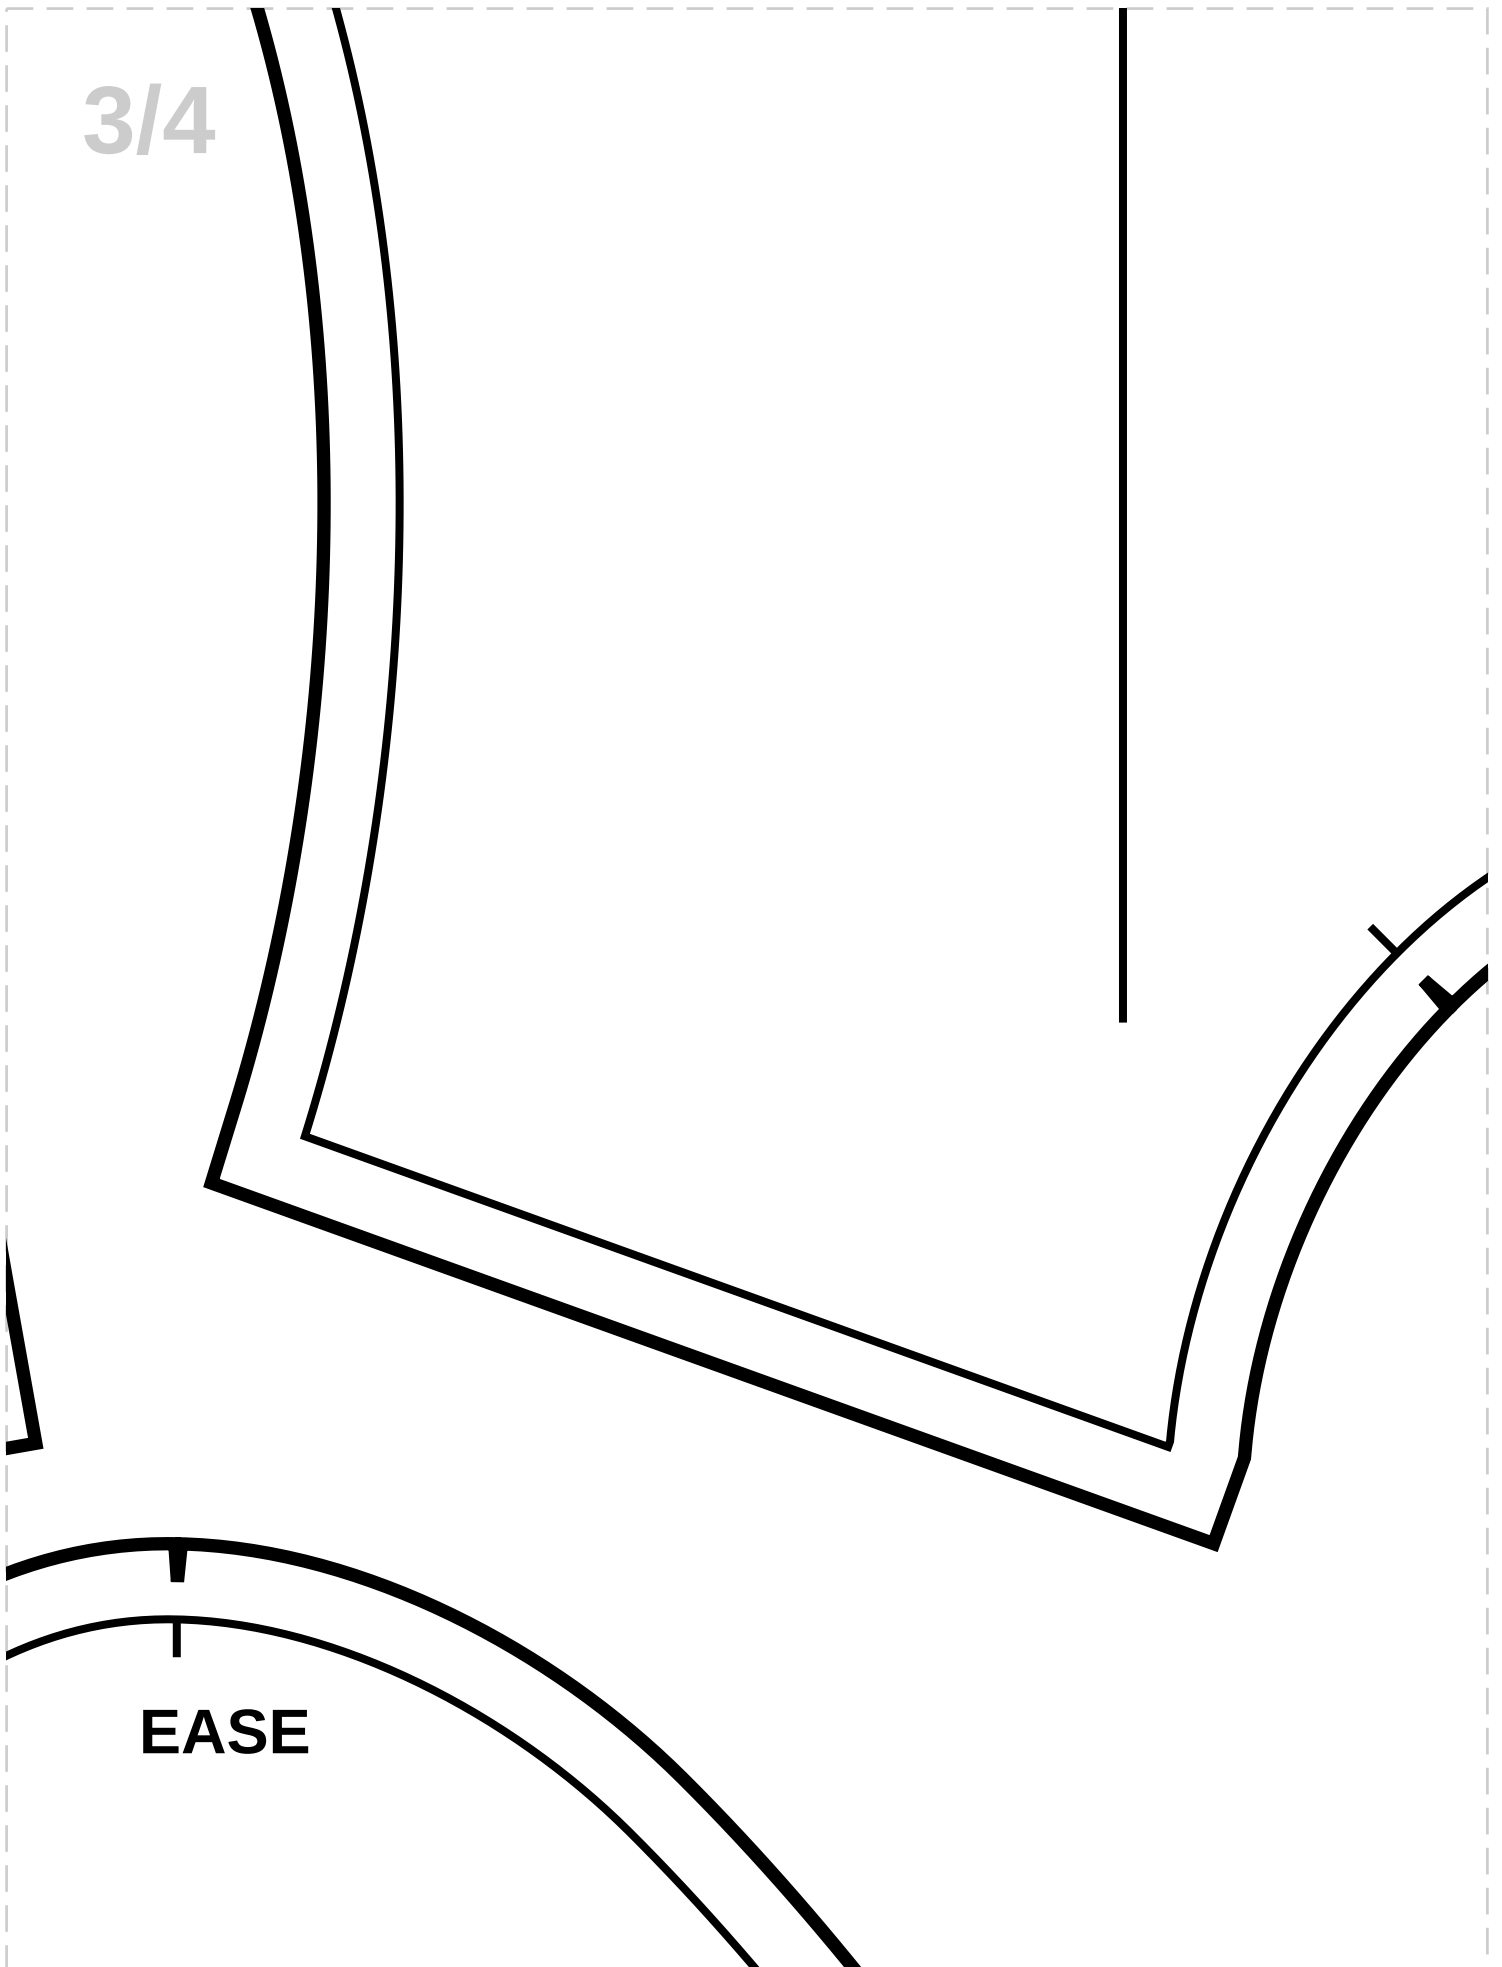

3/5

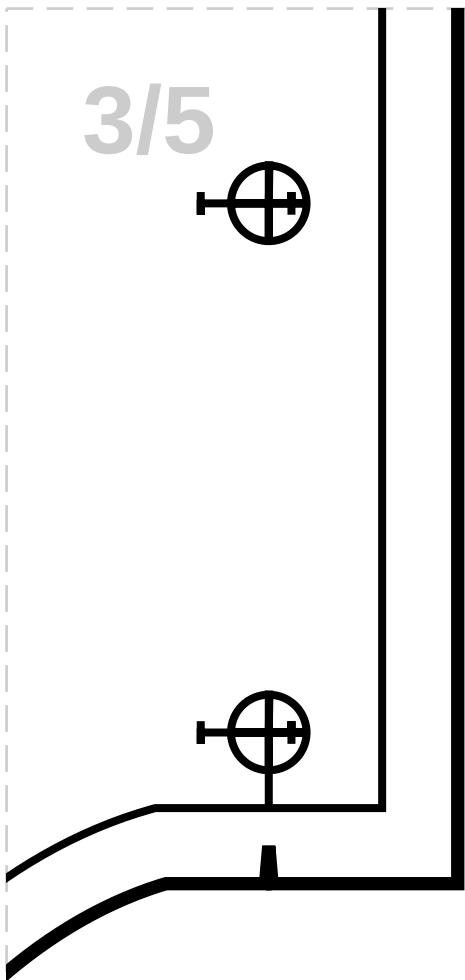

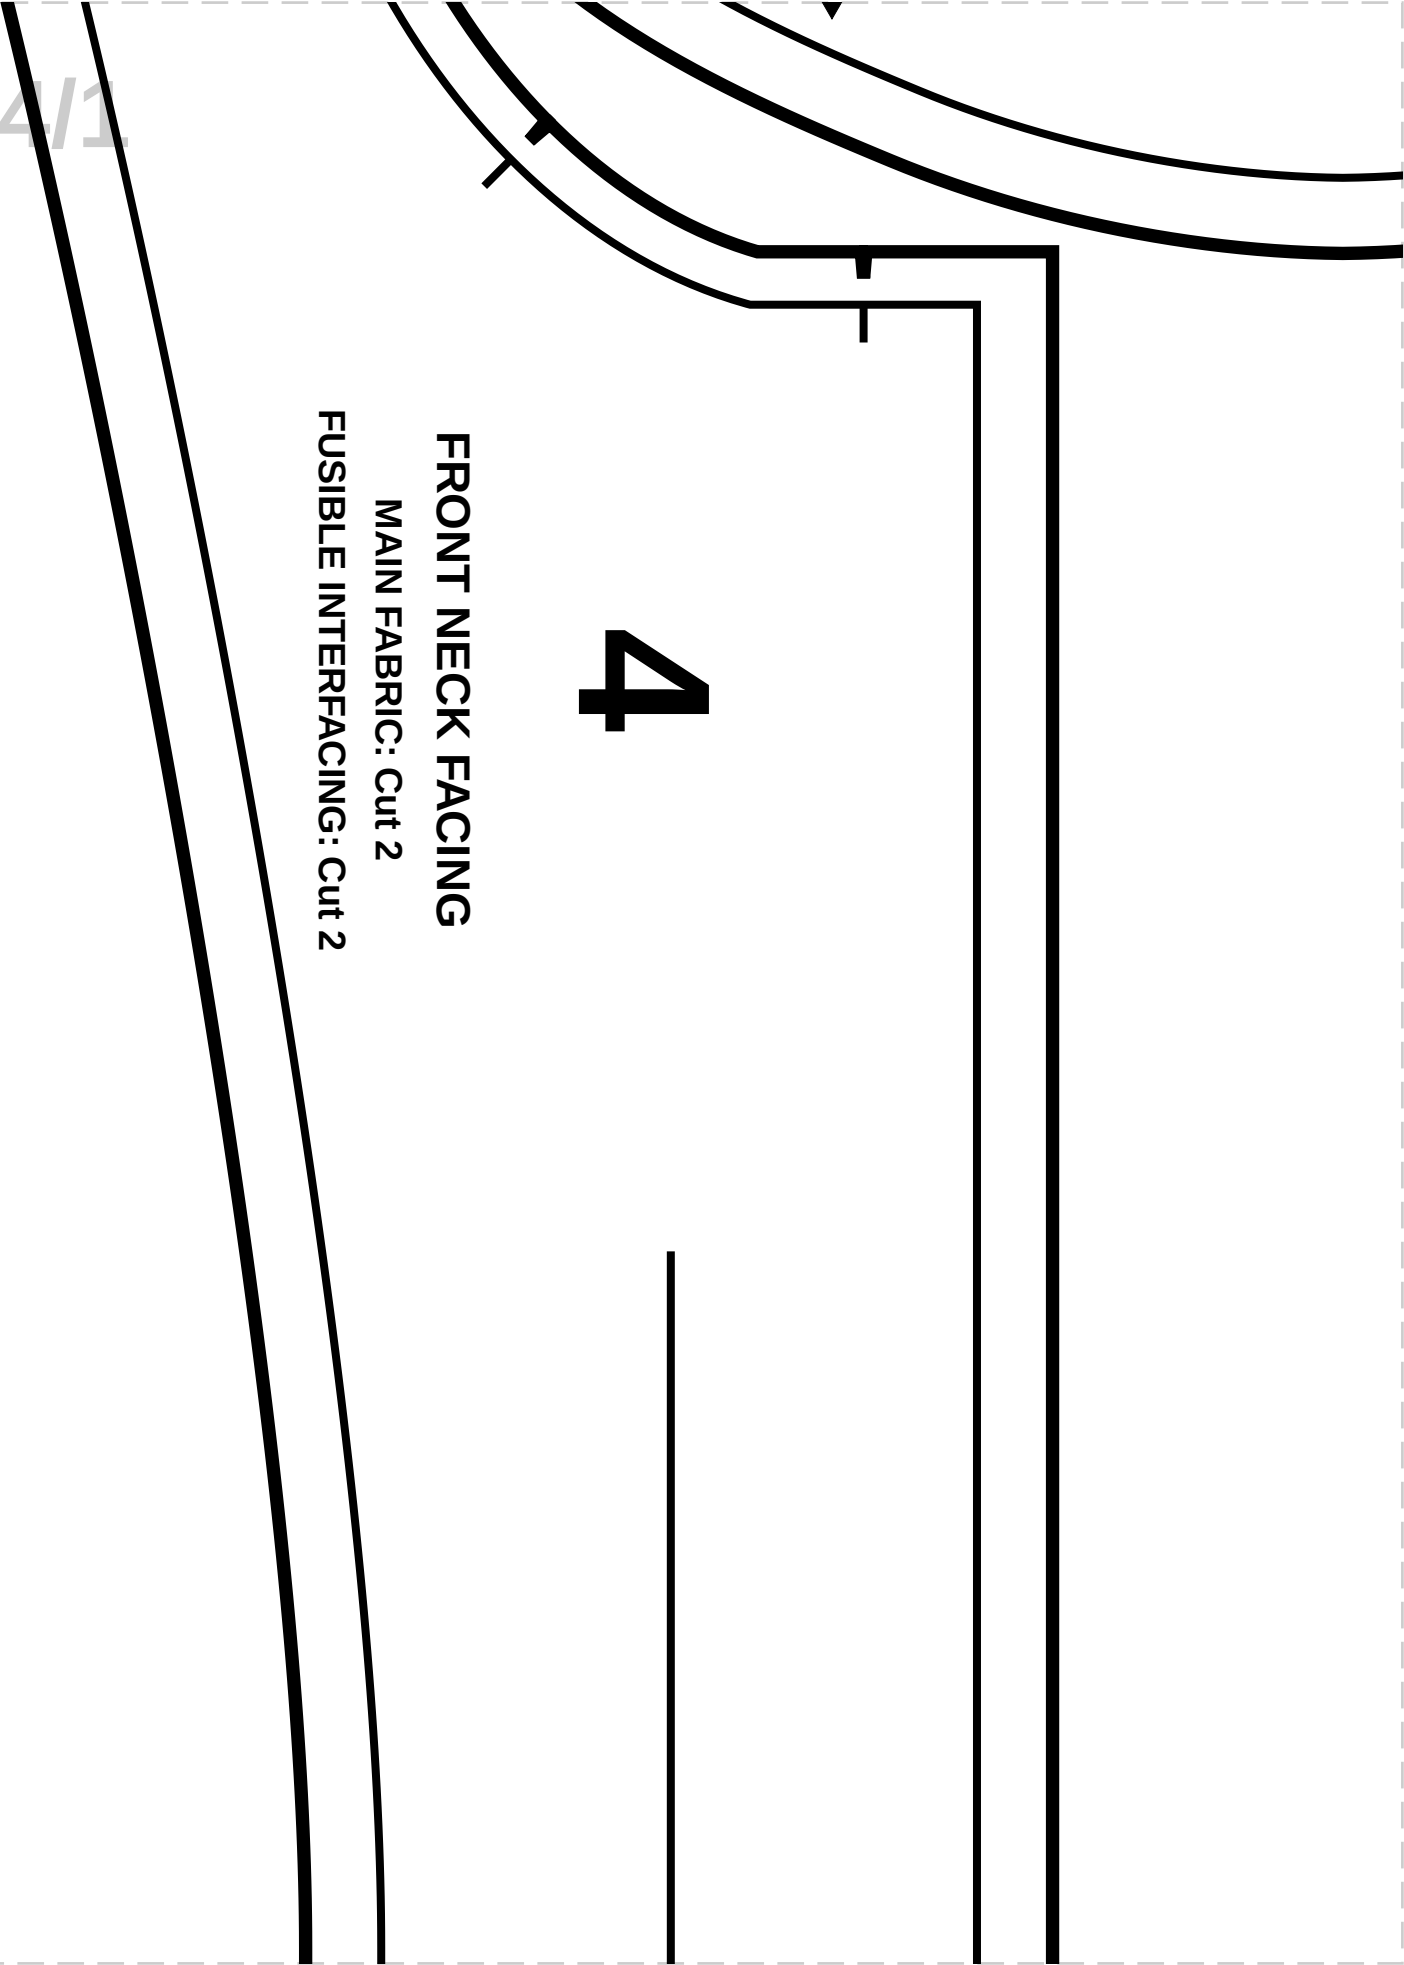

The diagram shows a pattern piece for a front neck facing. It features a curved neckline at the top with a small notch. A vertical line runs down the right side, and a horizontal line connects the neckline to this vertical line. A diagonal line runs from the bottom left towards the neckline. A small vertical line segment is located near the bottom center. The entire pattern is enclosed in a dashed rectangular border.

4


FRONT NECK FACING

MAIN FABRIC: Cut 2

FUSIBLE INTERFACING: Cut 2


4/1

4/2

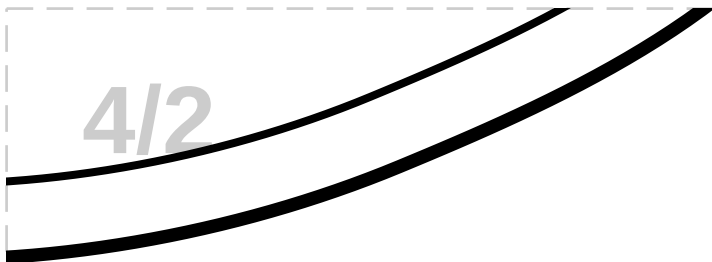


SLEEVE

MAIN FABRIC: Cut 2

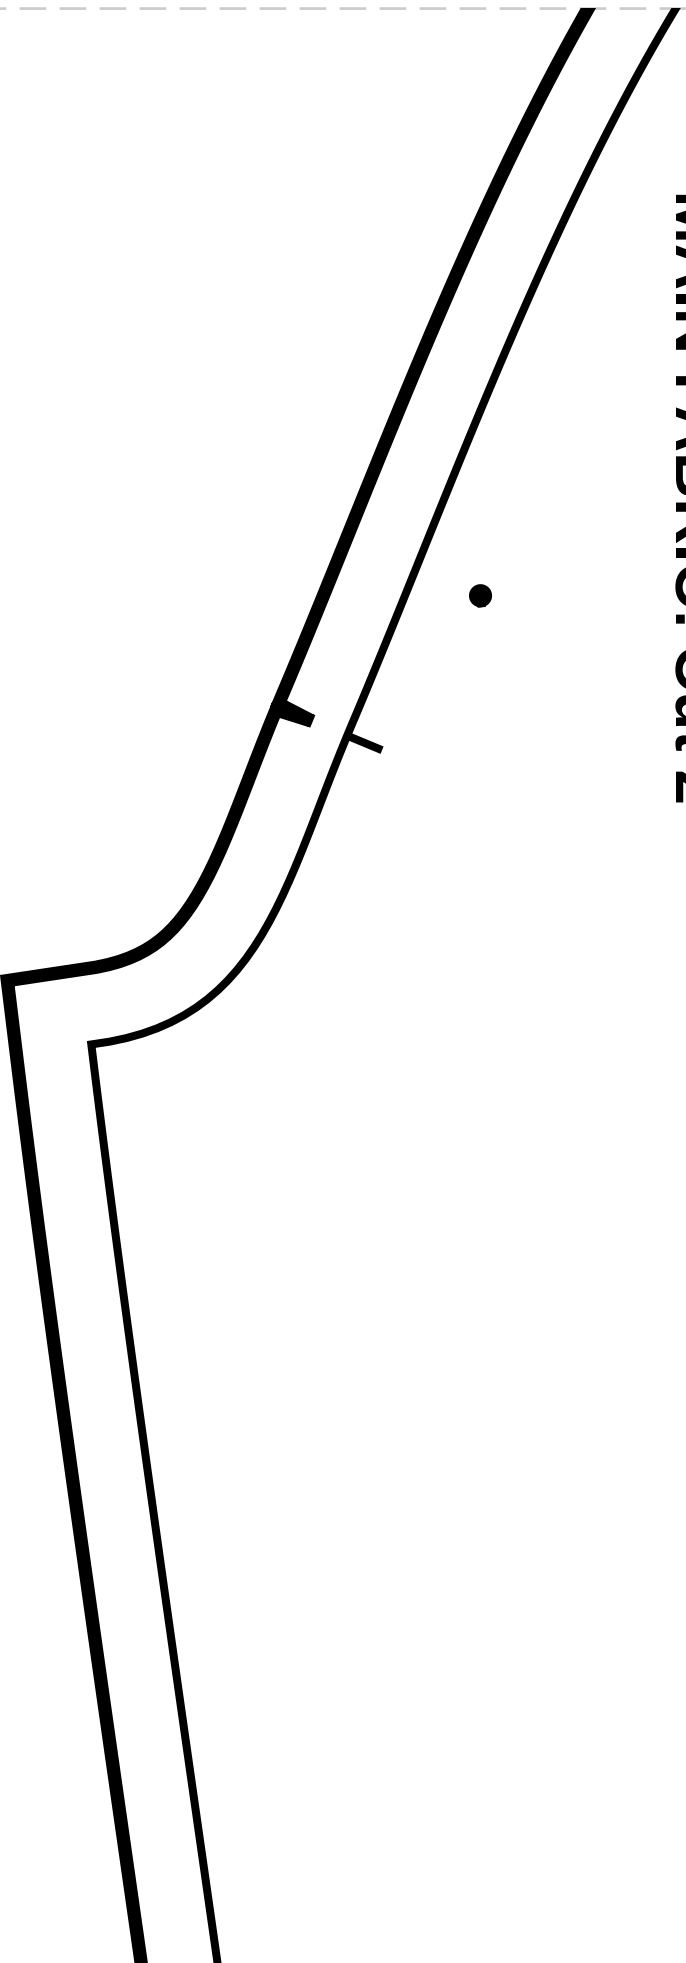


4/4

ω

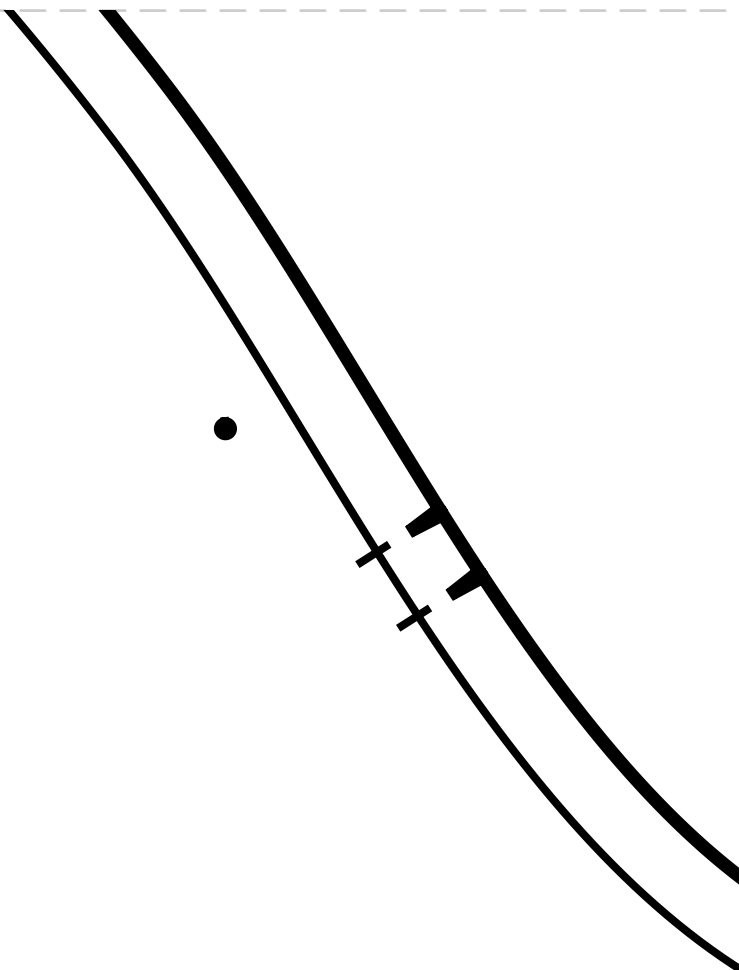

4/5

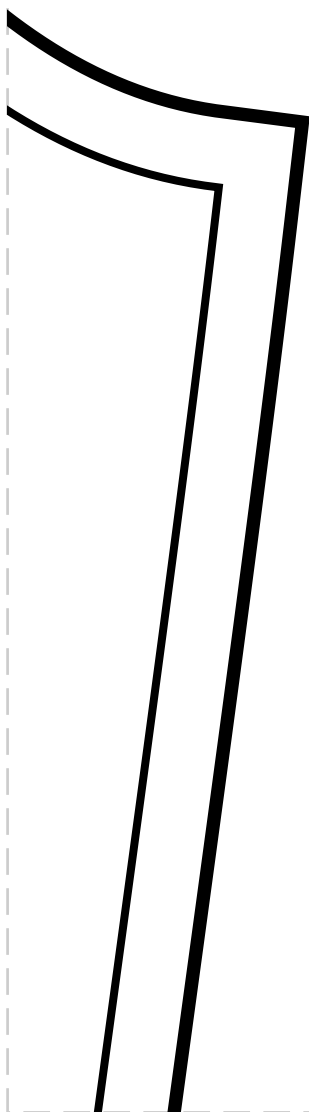


5/1



5/2

5/3

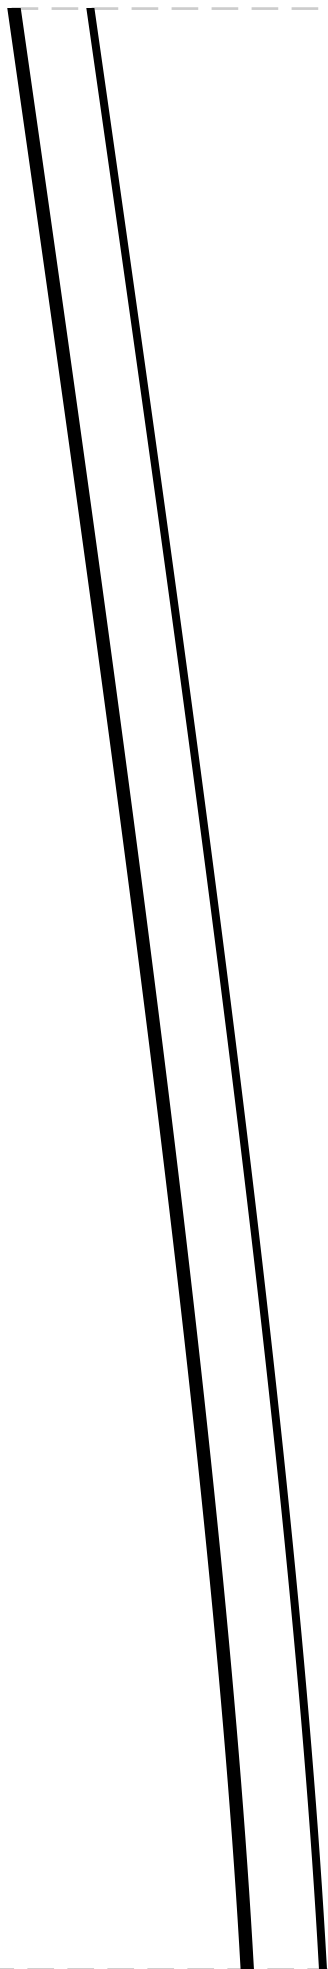


5/4




5/5

6/1

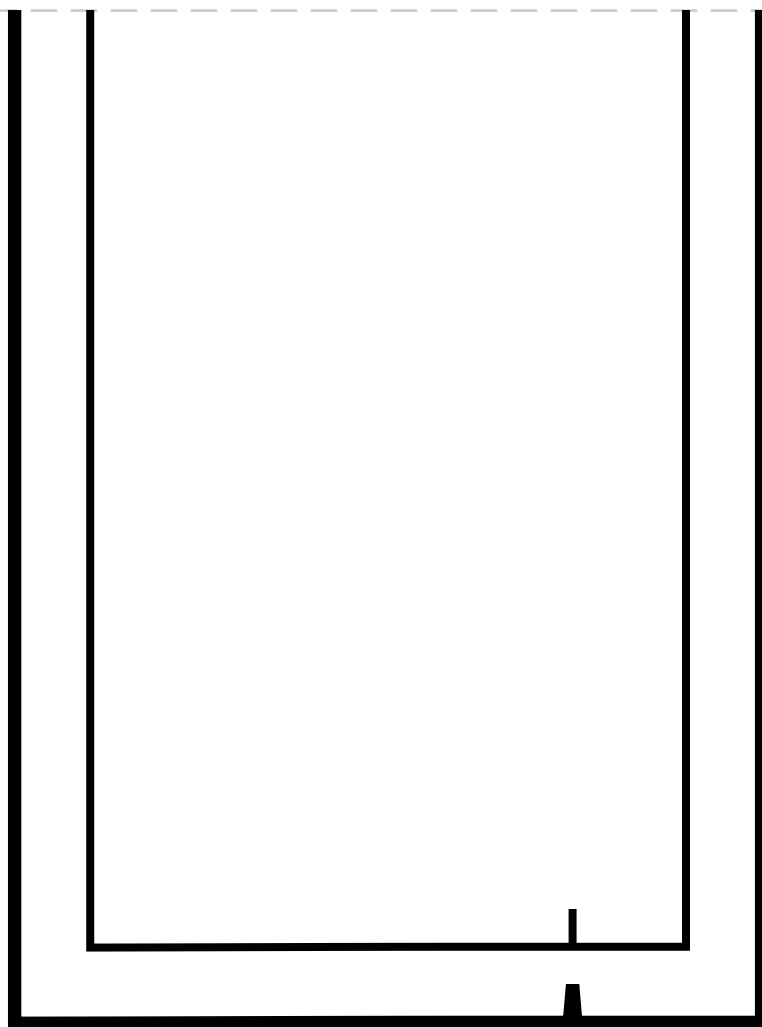

6/2

6/3

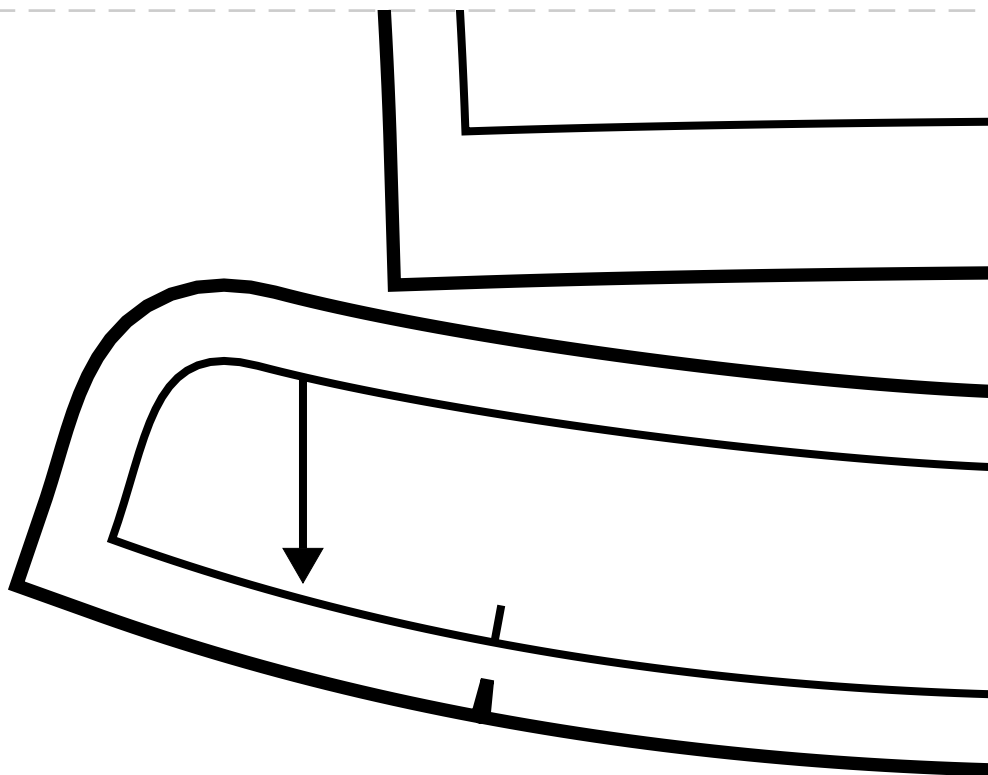

6/4

FOLD

6

COLLAR STAND
MAIN FABRIC: CUT 2
FUSIBLE INTERFACING: CUT 2

6/5

