

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 90.25, Waist: 73.75, Hips: 98

Notes

How to print Printing


Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

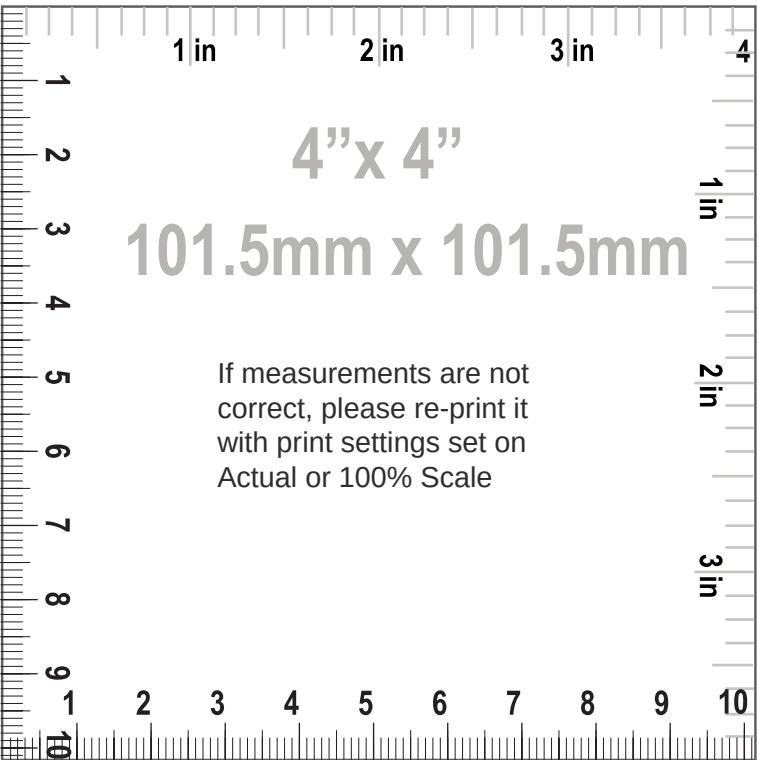

Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC: Cut 1
4. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 1



Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 0.92 none (3/8 in)
4. Stretch factor horizontal 0.92 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Low hips 51.79 cm (20 3/8 in)
7. Thigh 36.22 cm (14 1/4 in)
8. Knee 39.42 cm (15 1/2 in)
9. Bottom opening 44.01 cm (17 3/8 in)
10. Front rise 27.30 cm (10 3/4 in)
11. Back rise 38.15 cm (15 in)
12. Crotch height 27.30 cm (10 3/4 in)
13. Inseam length 56.35 cm (22 1/8 in)
14. Pants side seam length 83.91 cm (33 in)
15. Waistband width 3.30 cm (1 1/4 in)
16. Waistband elastic width 3.30 cm (1 1/4 in)
17. Eyelet diameter 0.70 cm (1/4 in)
18. Cord length 97.79 cm (38 1/2 in)
19. Waistband length 47.79 cm (18 7/8 in)
20. Waistband elastic length 61.40 cm (24 1/8 in)

The image displays a sewing pattern for pants, consisting of three main pieces labeled 1, 2, and 3, laid out on a grid background.

- Piece 1: PANTS FRONT** (Main Fabric: Cut 2). This piece shows the front half of the pants, including the waistband, crotch, and leg. It features a central vertical fold line and a horizontal waistline. A small inset shows a plus sign and a minus sign.
- Piece 2: PANTS BACK** (Main Fabric: Cut 2). This piece shows the back half of the pants, including the waistband, crotch, and leg. It features a central vertical fold line and a horizontal waistline.
- Piece 3: ELASTIC** (Length 24 1/8" (61.4) cm, Width 1 1/4" (3.3) cm). This piece is a long, narrow strip of fabric, intended for the waistband. It includes a central vertical fold line and a horizontal waistline. A small inset shows a plus sign and a minus sign.

The pattern includes various markings such as fold lines, waistlines, and elastic placement. A small inset shows a plus sign and a minus sign.

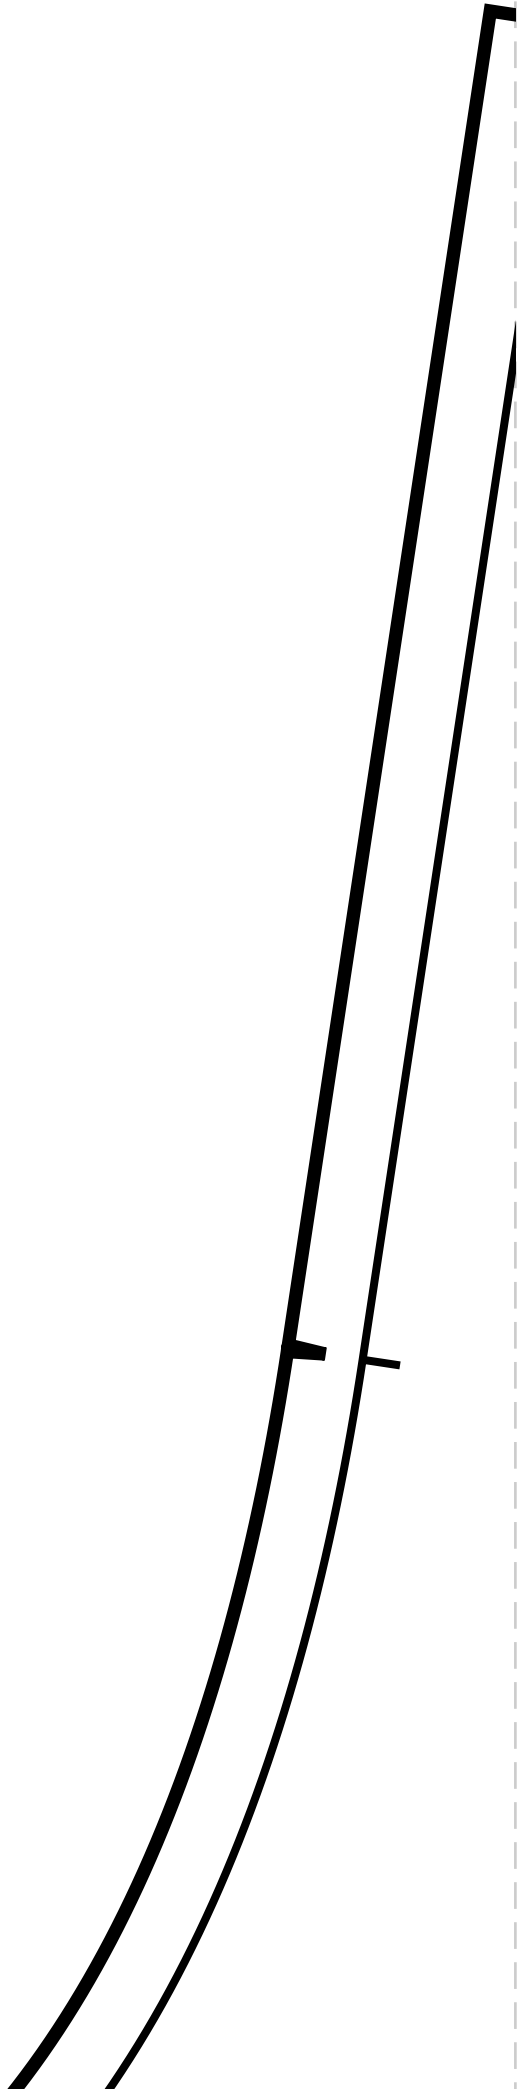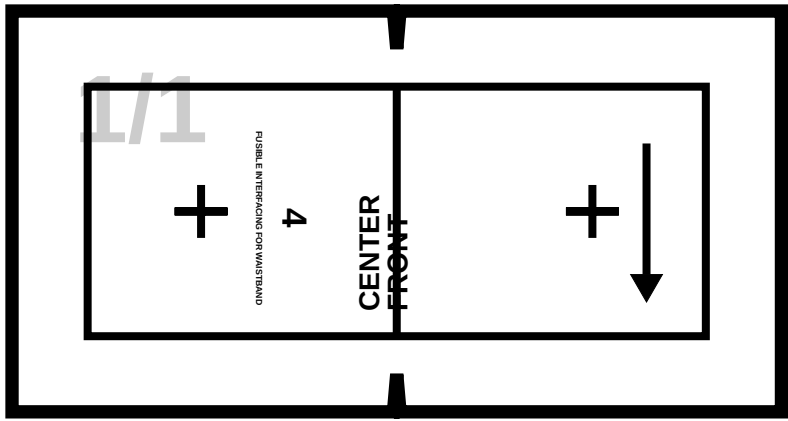

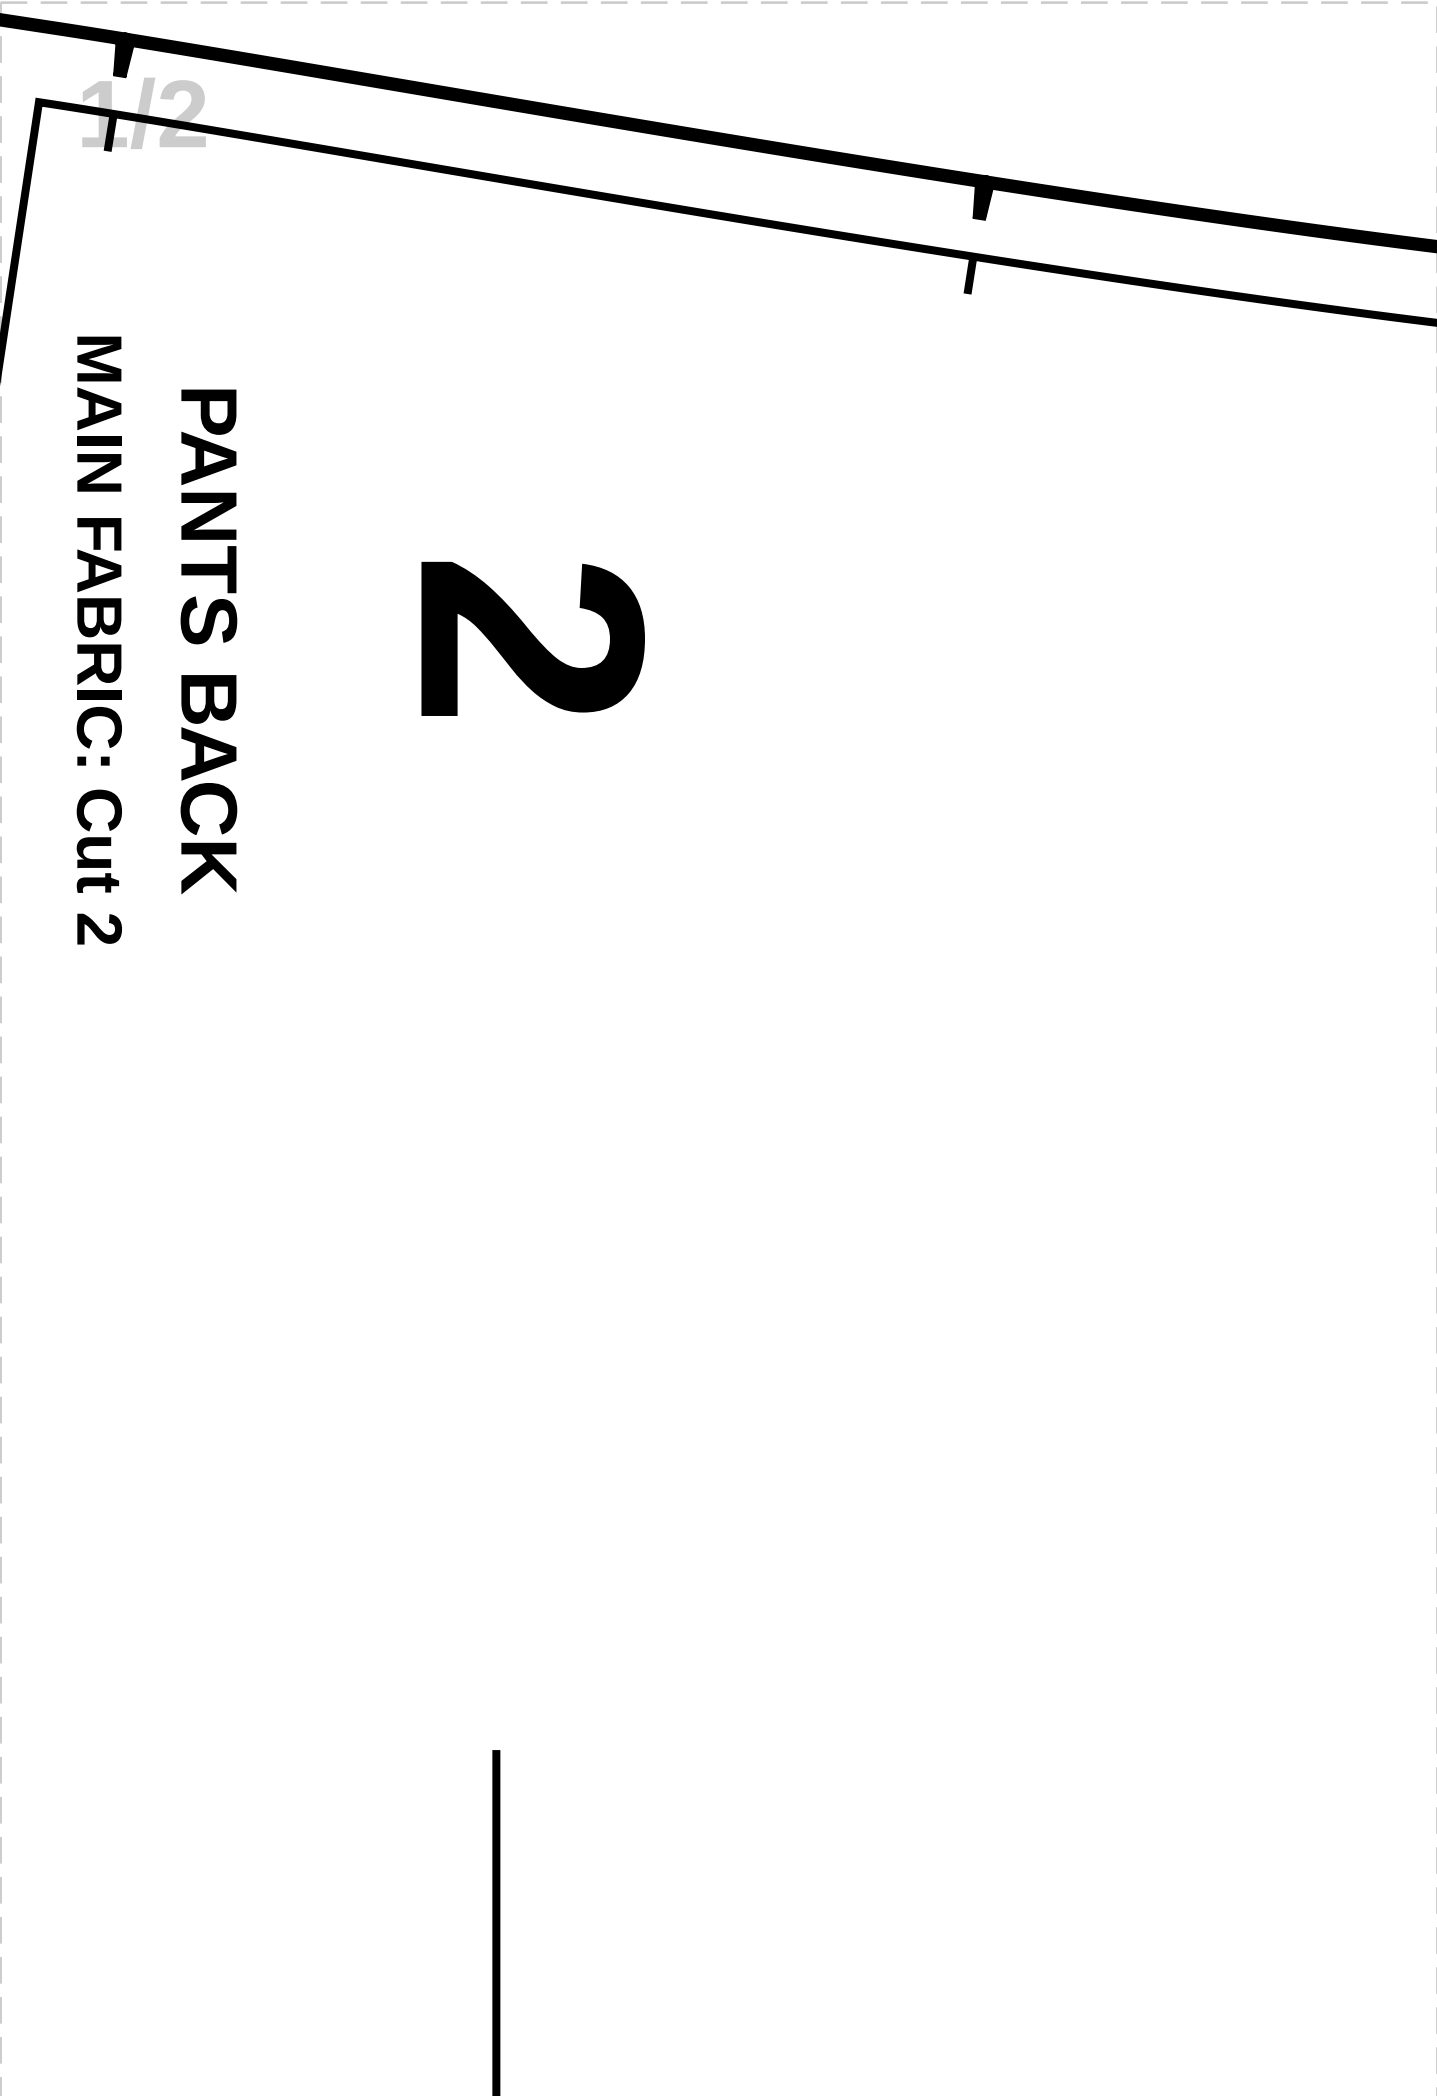

2

PANTS BACK

MAIN FABRIC: cut 2

1/2

1/3

1

PANTS FRONT
MAIN FABRIC: Cut 2


1/4



1/5


1/6

2/1

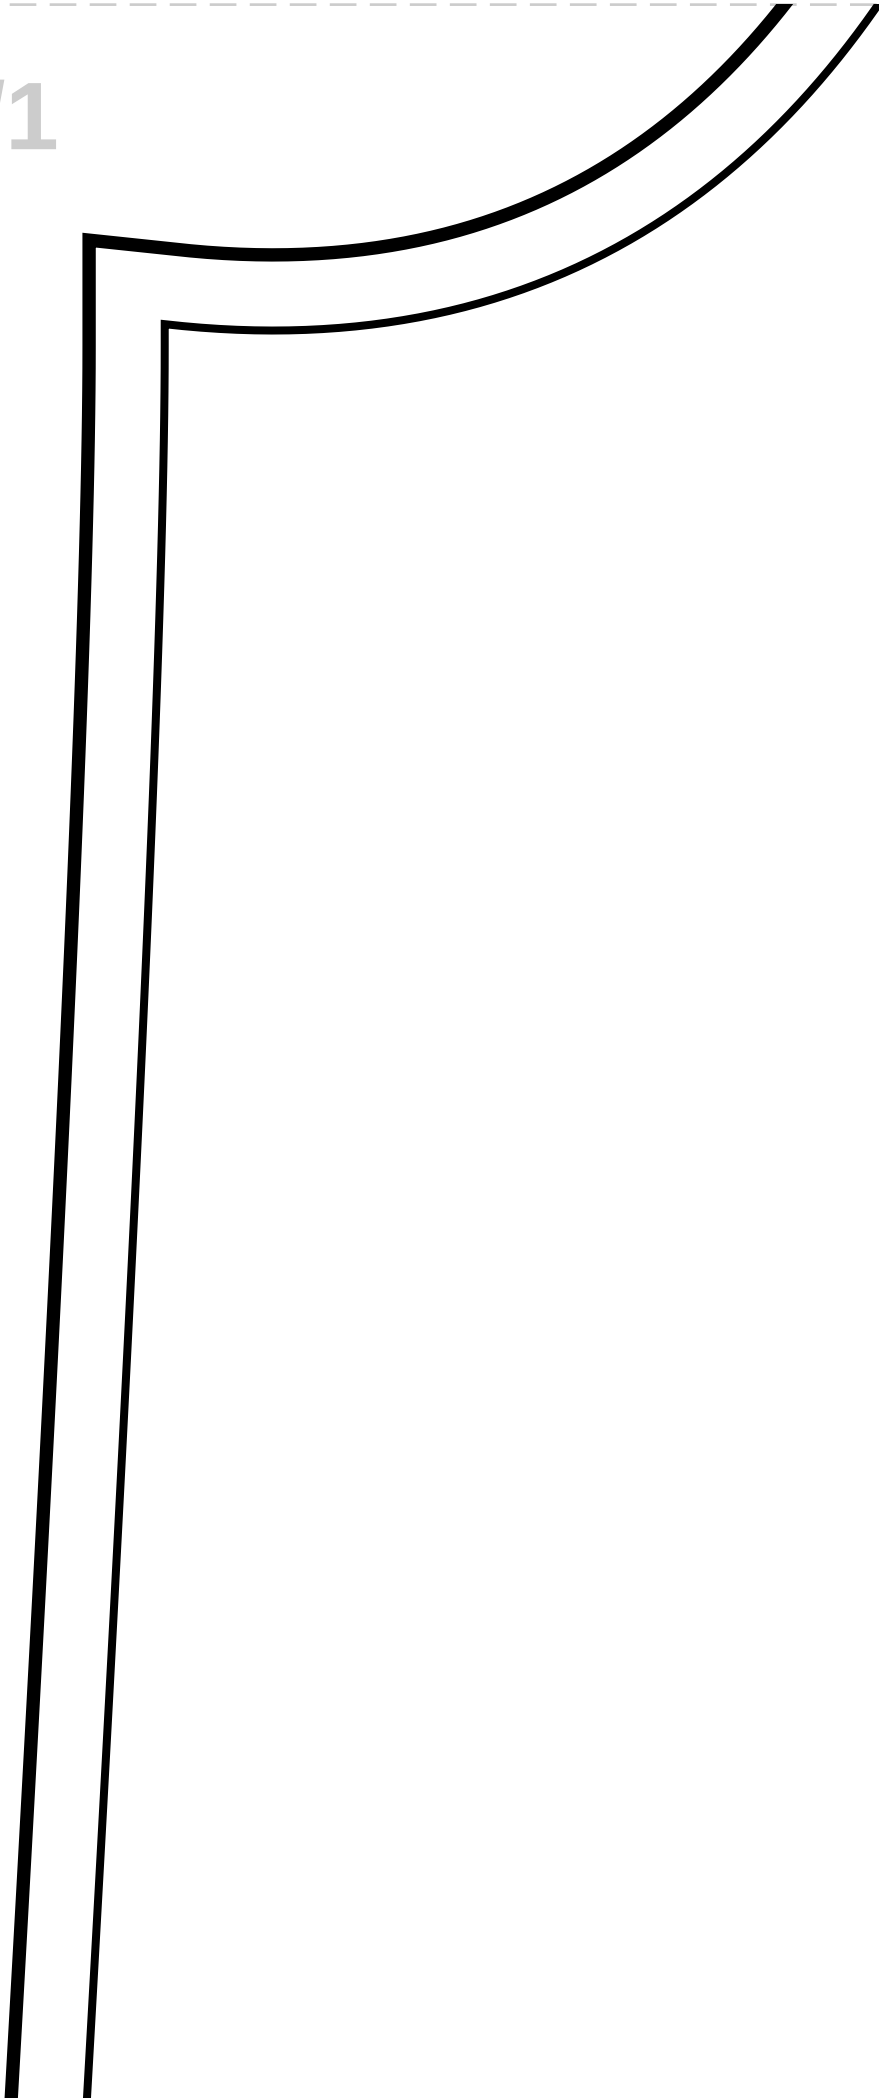


2/2

2/3

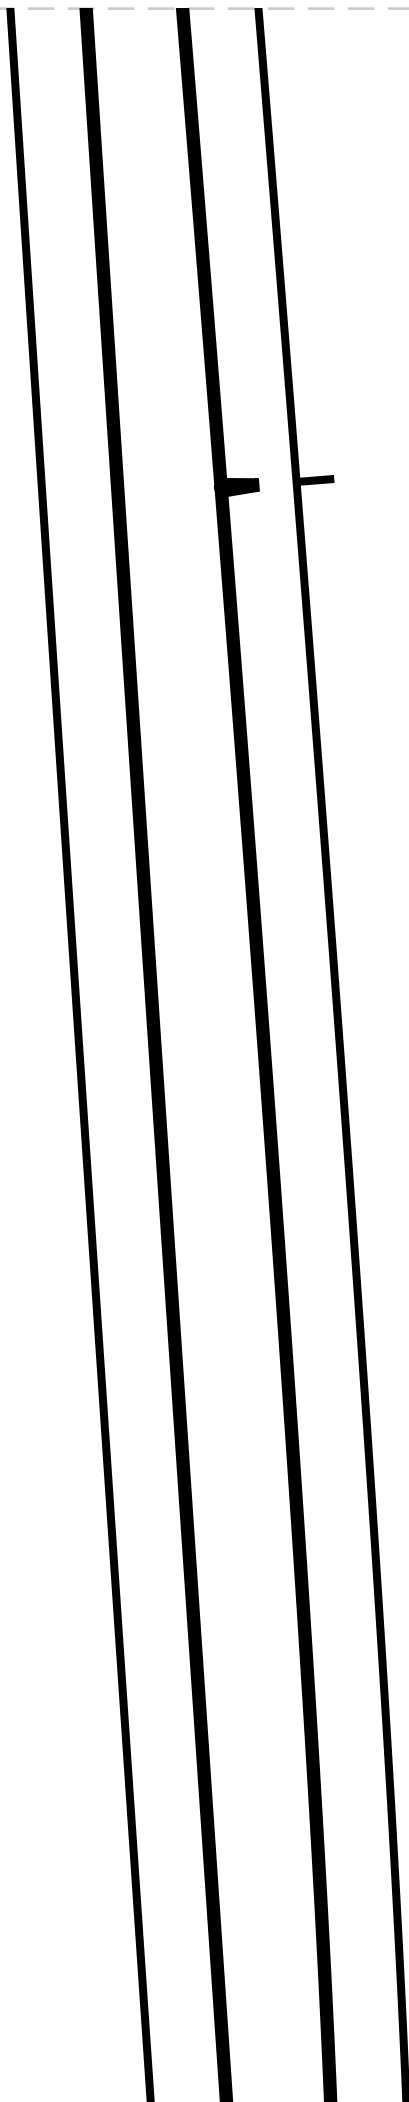

2/4

2/5

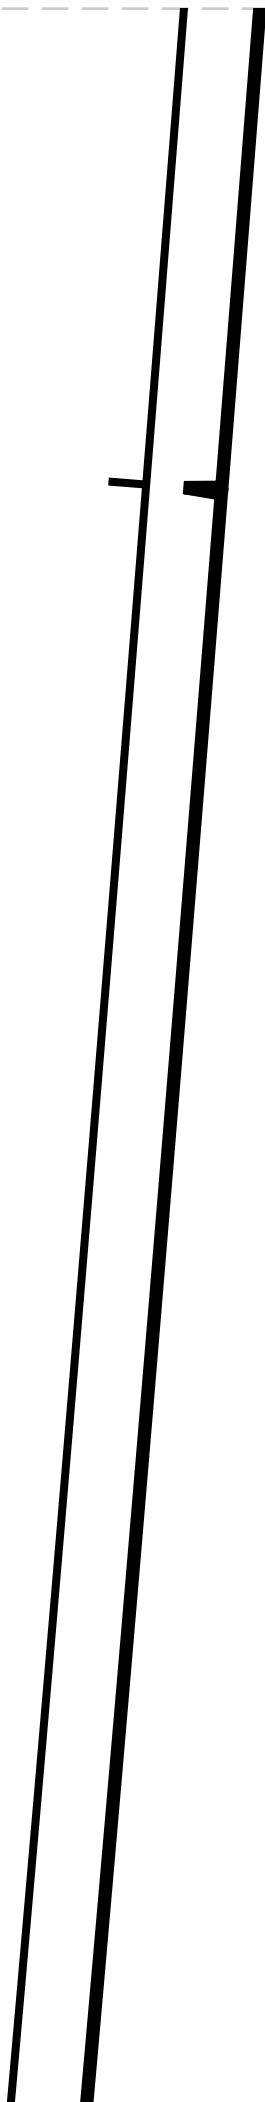


3/1



3/2




3/3

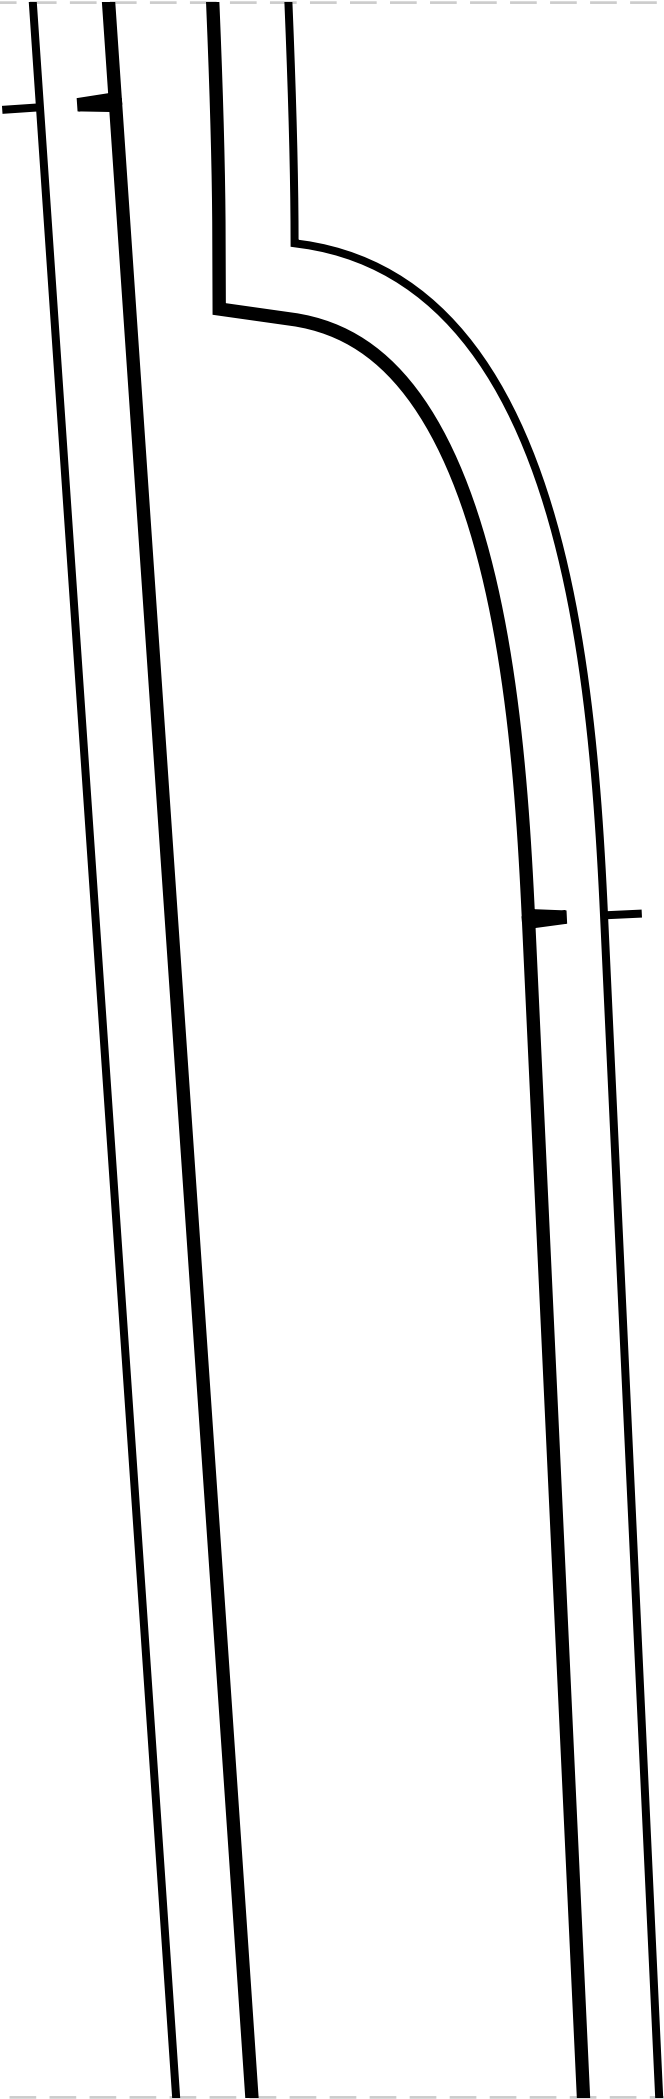

3/4



3/5

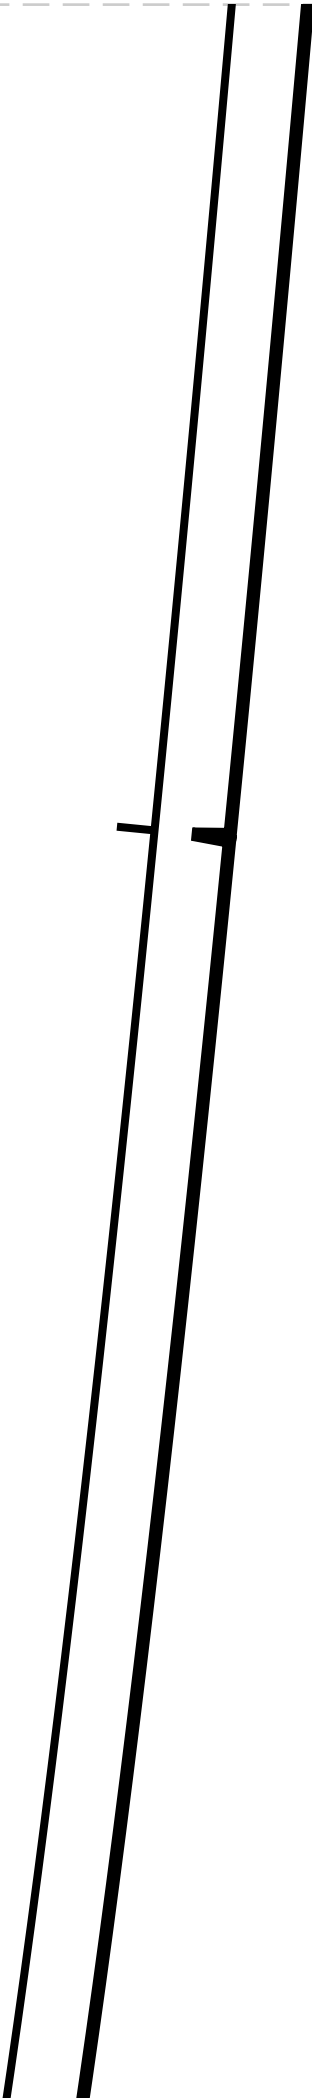

3/6

4/1

3

WAISTBAND
MAIN FABRIC: Cut 1
SIDE SEAM

4/2

ELASTIC: LENGTH 24 1/8" (

CENTER BACK

WAISTLINE

4/3

(61.4) cm WIDTH 1 1/4" (3.3) cm

SIDE SEAM

FOLD

4/4



+

CENTER FRONT

WAIST

4/5

+

LINE

