

Print this Calibration Test page first!

Size: Height: 167.75, Bust: 95.25, Waist: 78.75, Hips: 102.75

Notes

How to print Printing


Once your Calibration Test Page has been printed, measure the 4"x 4" (10cm) scale box with a ruler. If the lengths match, you can confidently print your pattern. If the rulers do not match, set your print settings to 100% or Actual and retry.

Cutting

Your printouts will always have a dashed border to perfectly match your sheets. Cut off the right edge of each page. Be careful not to cut beyond the dashed mark, otherwise your patterns will not align accurately.

Tapping

Group each sheet by the second number marked on each pate i.e. in a group 1, there are: 1/1, 2/1, 3/1, 4/1, etc. In a group 2: 1/2, 2/2 etc. 2. Place page 1/1 on top of the page 2/1, overlapping the right side edge. Match corners and crosses and secure with a pin or tape. Then use a scotch tape to permanently attach the sheets together.

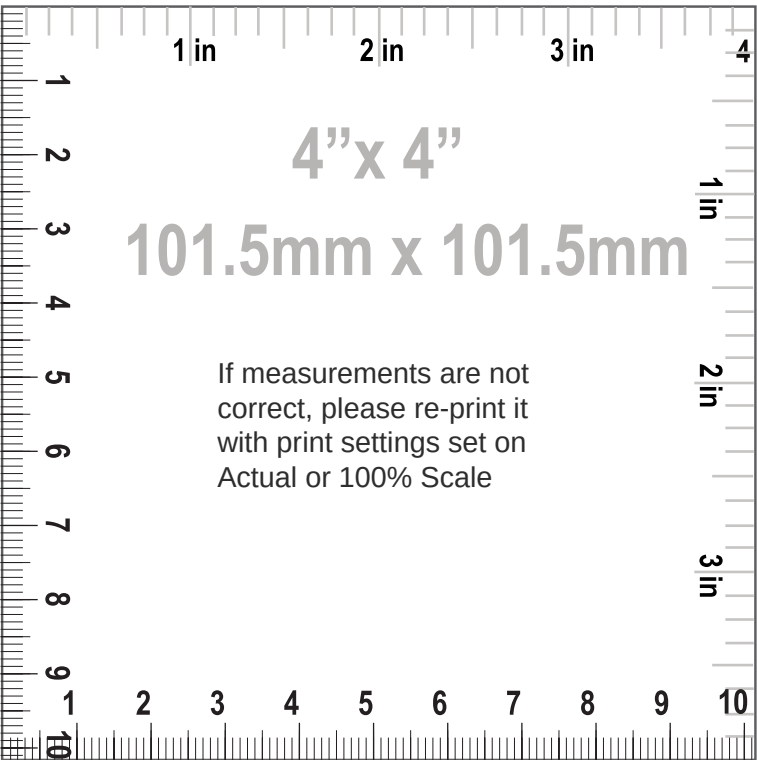

Seam Allowance: 1 (3/8 in)

Pattern pieces:

1. "PANTS FRONT", MAIN FABRIC: Cut 2
2. "PANTS BACK", MAIN FABRIC: Cut 2
3. "WAISTBAND", MAIN FABRIC: Cut 1
4. "FUSIBLE INTERFACING FOR WAISTBAND", FUSIBLE INTERFACING: Cut 1



Pattern Specs (Circumferences are divided by 2):


1. Hem max 3.00 none (1 1/8 in)
2. Seam allowance max 2.00 none (3/4 in)
3. Stretch factor 0.92 none (3/8 in)
4. Stretch factor horizontal 0.92 none (3/8 in)
5. Stretch factor vertical 1.00 none (3/8 in)
6. Low hips 54.42 cm (21 3/8 in)
7. Thigh 38.16 cm (15 in)
8. Knee 41.34 cm (16 1/4 in)
9. Bottom opening 46.06 cm (18 1/8 in)
10. Front rise 27.98 cm (11 in)
11. Back rise 39.39 cm (15 1/2 in)
12. Crotch height 27.97 cm (11 in)
13. Inseam length 55.70 cm (21 7/8 in)
14. Pants side seam length 83.95 cm (33 in)
15. Waistband width 3.30 cm (1 1/4 in)
16. Waistband elastic width 3.30 cm (1 1/4 in)
17. Eyelet diameter 0.70 cm (1/4 in)
18. Cord length 100.40 cm (39 1/2 in)
19. Waistband length 50.40 cm (19 7/8 in)
20. Waistband elastic length 65.40 cm (25 3/4 in)

The image displays a sewing pattern for a pair of pants, laid out on a grid. The pattern consists of three main pieces, each labeled with a number and a description:

- 1 PANTS FRONT**: The front panel of the pants, featuring a center crease and side seam allowances.
- 2 PANTS BACK**: The back panel of the pants, featuring a center crease and side seam allowances.
- 3 ELASTIC**: The elastic band, with a length of 25 3/4" (65.4) cm and a width of 1 1/4" (3.3) cm.

The pattern includes various markings such as fold lines, seam allowances, and a center crease. A small inset in the top right corner shows a simplified version of the pattern pieces.

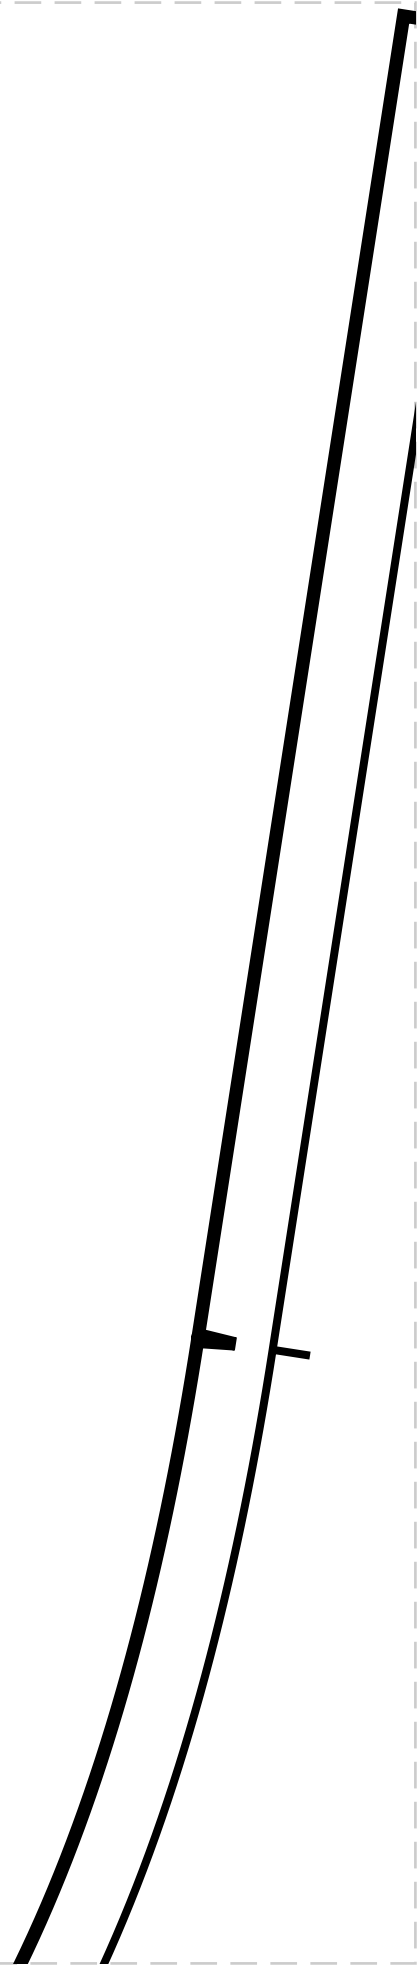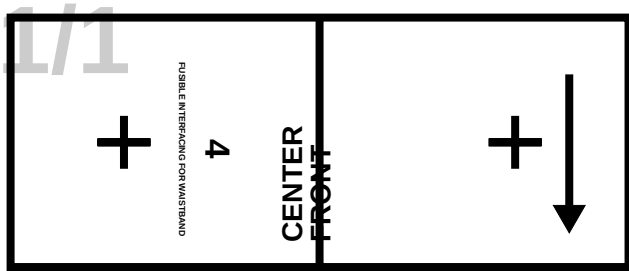

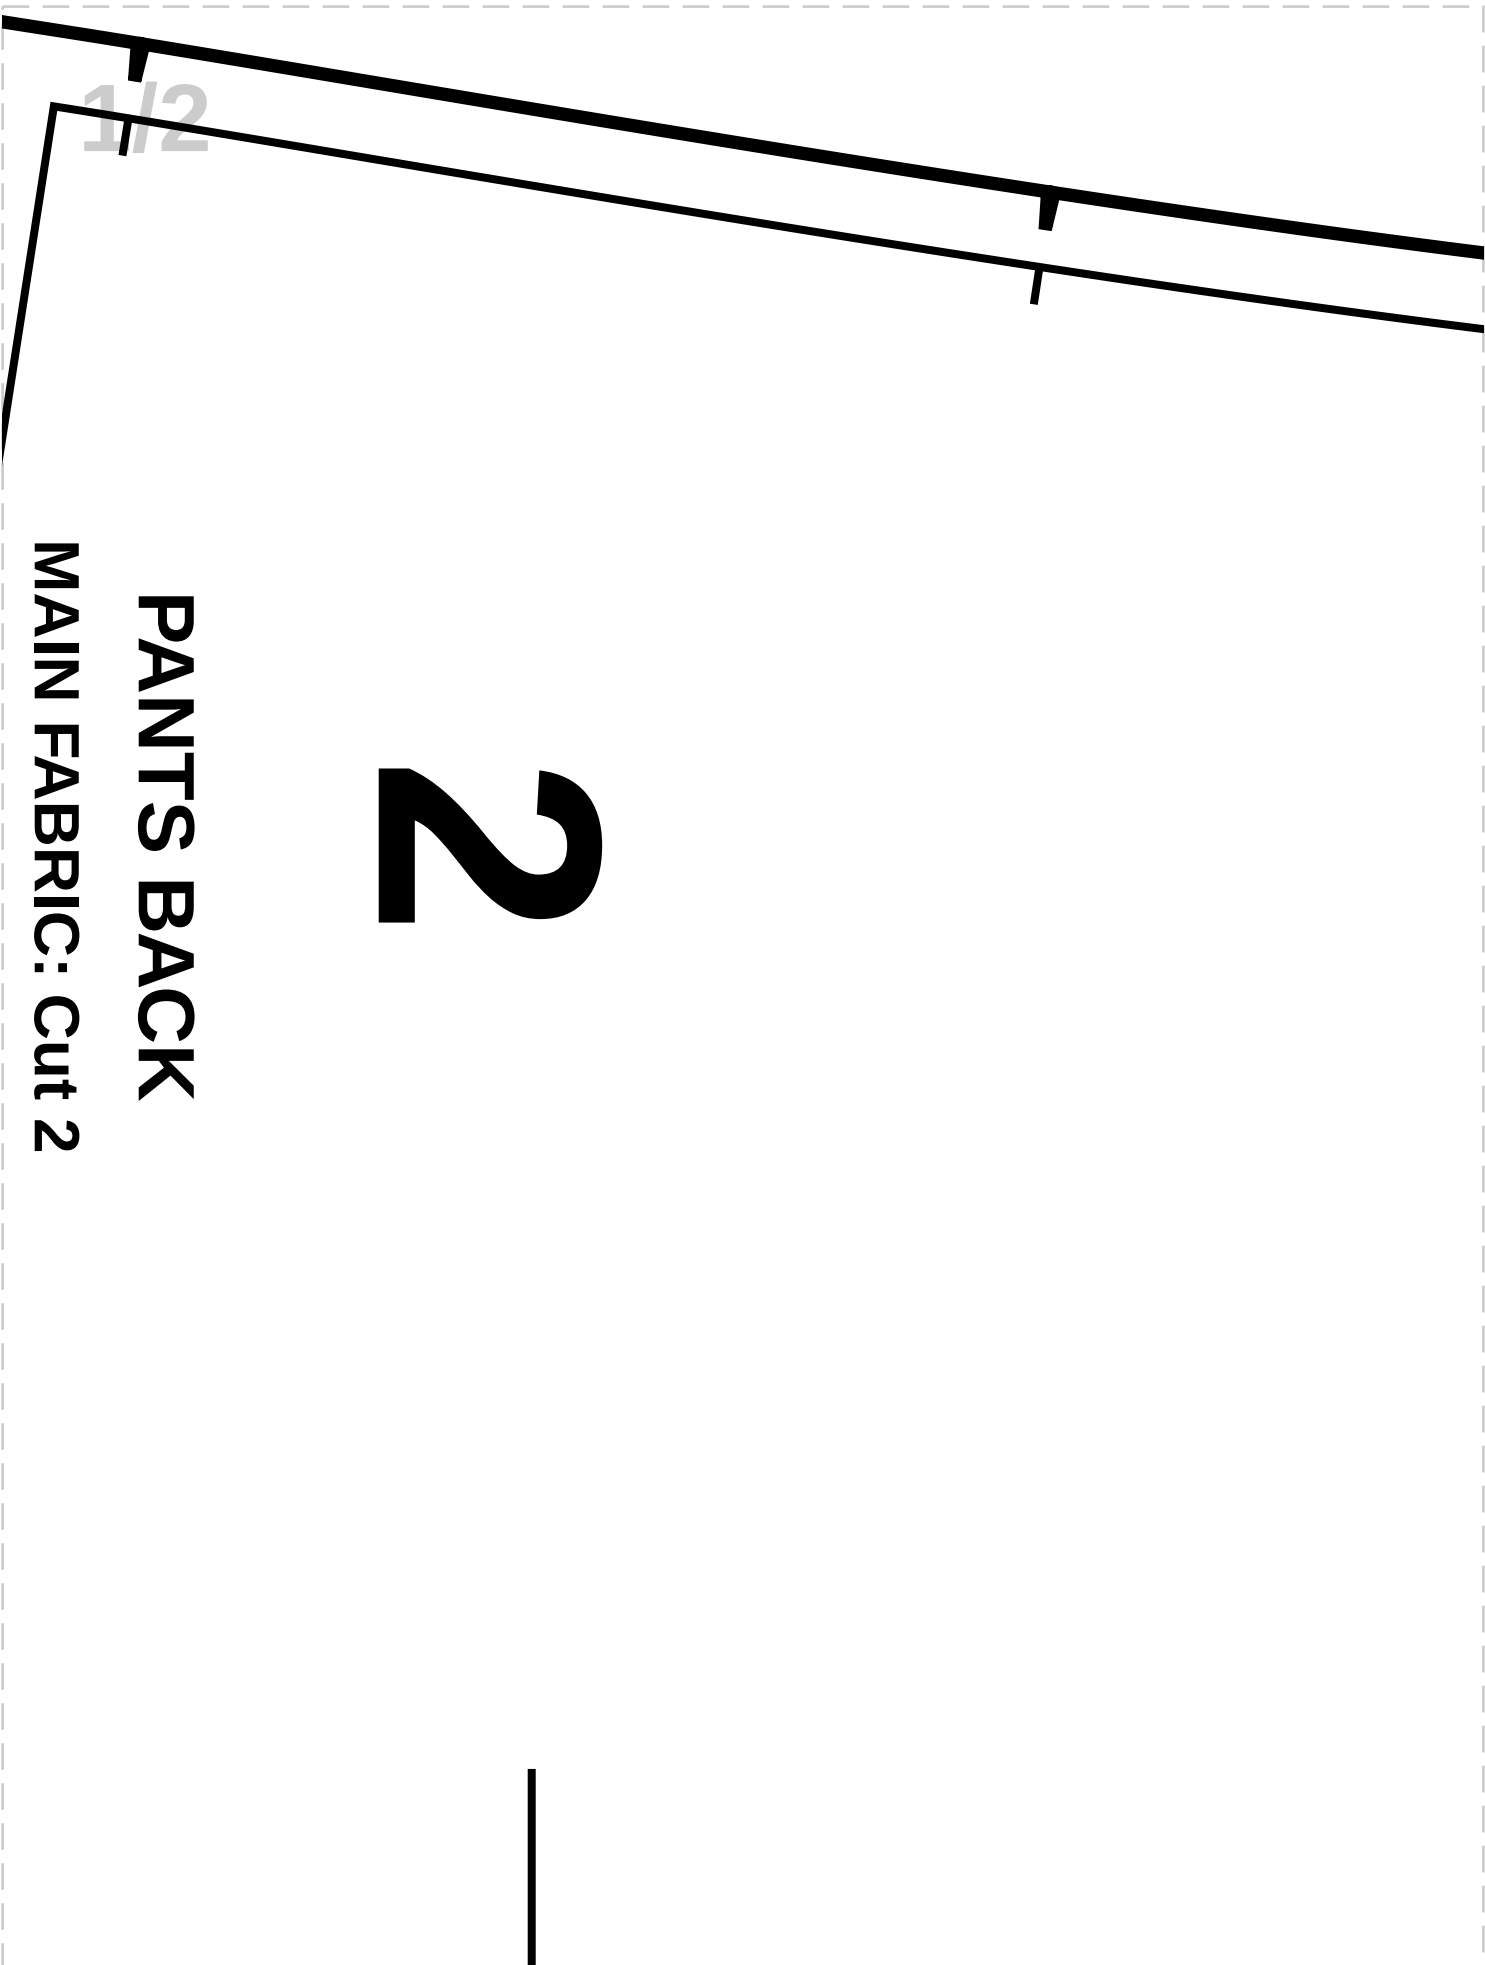

2


PANTS BACK

MAIN FABRIC: cut 2

1/3

1

PANTS FRONT

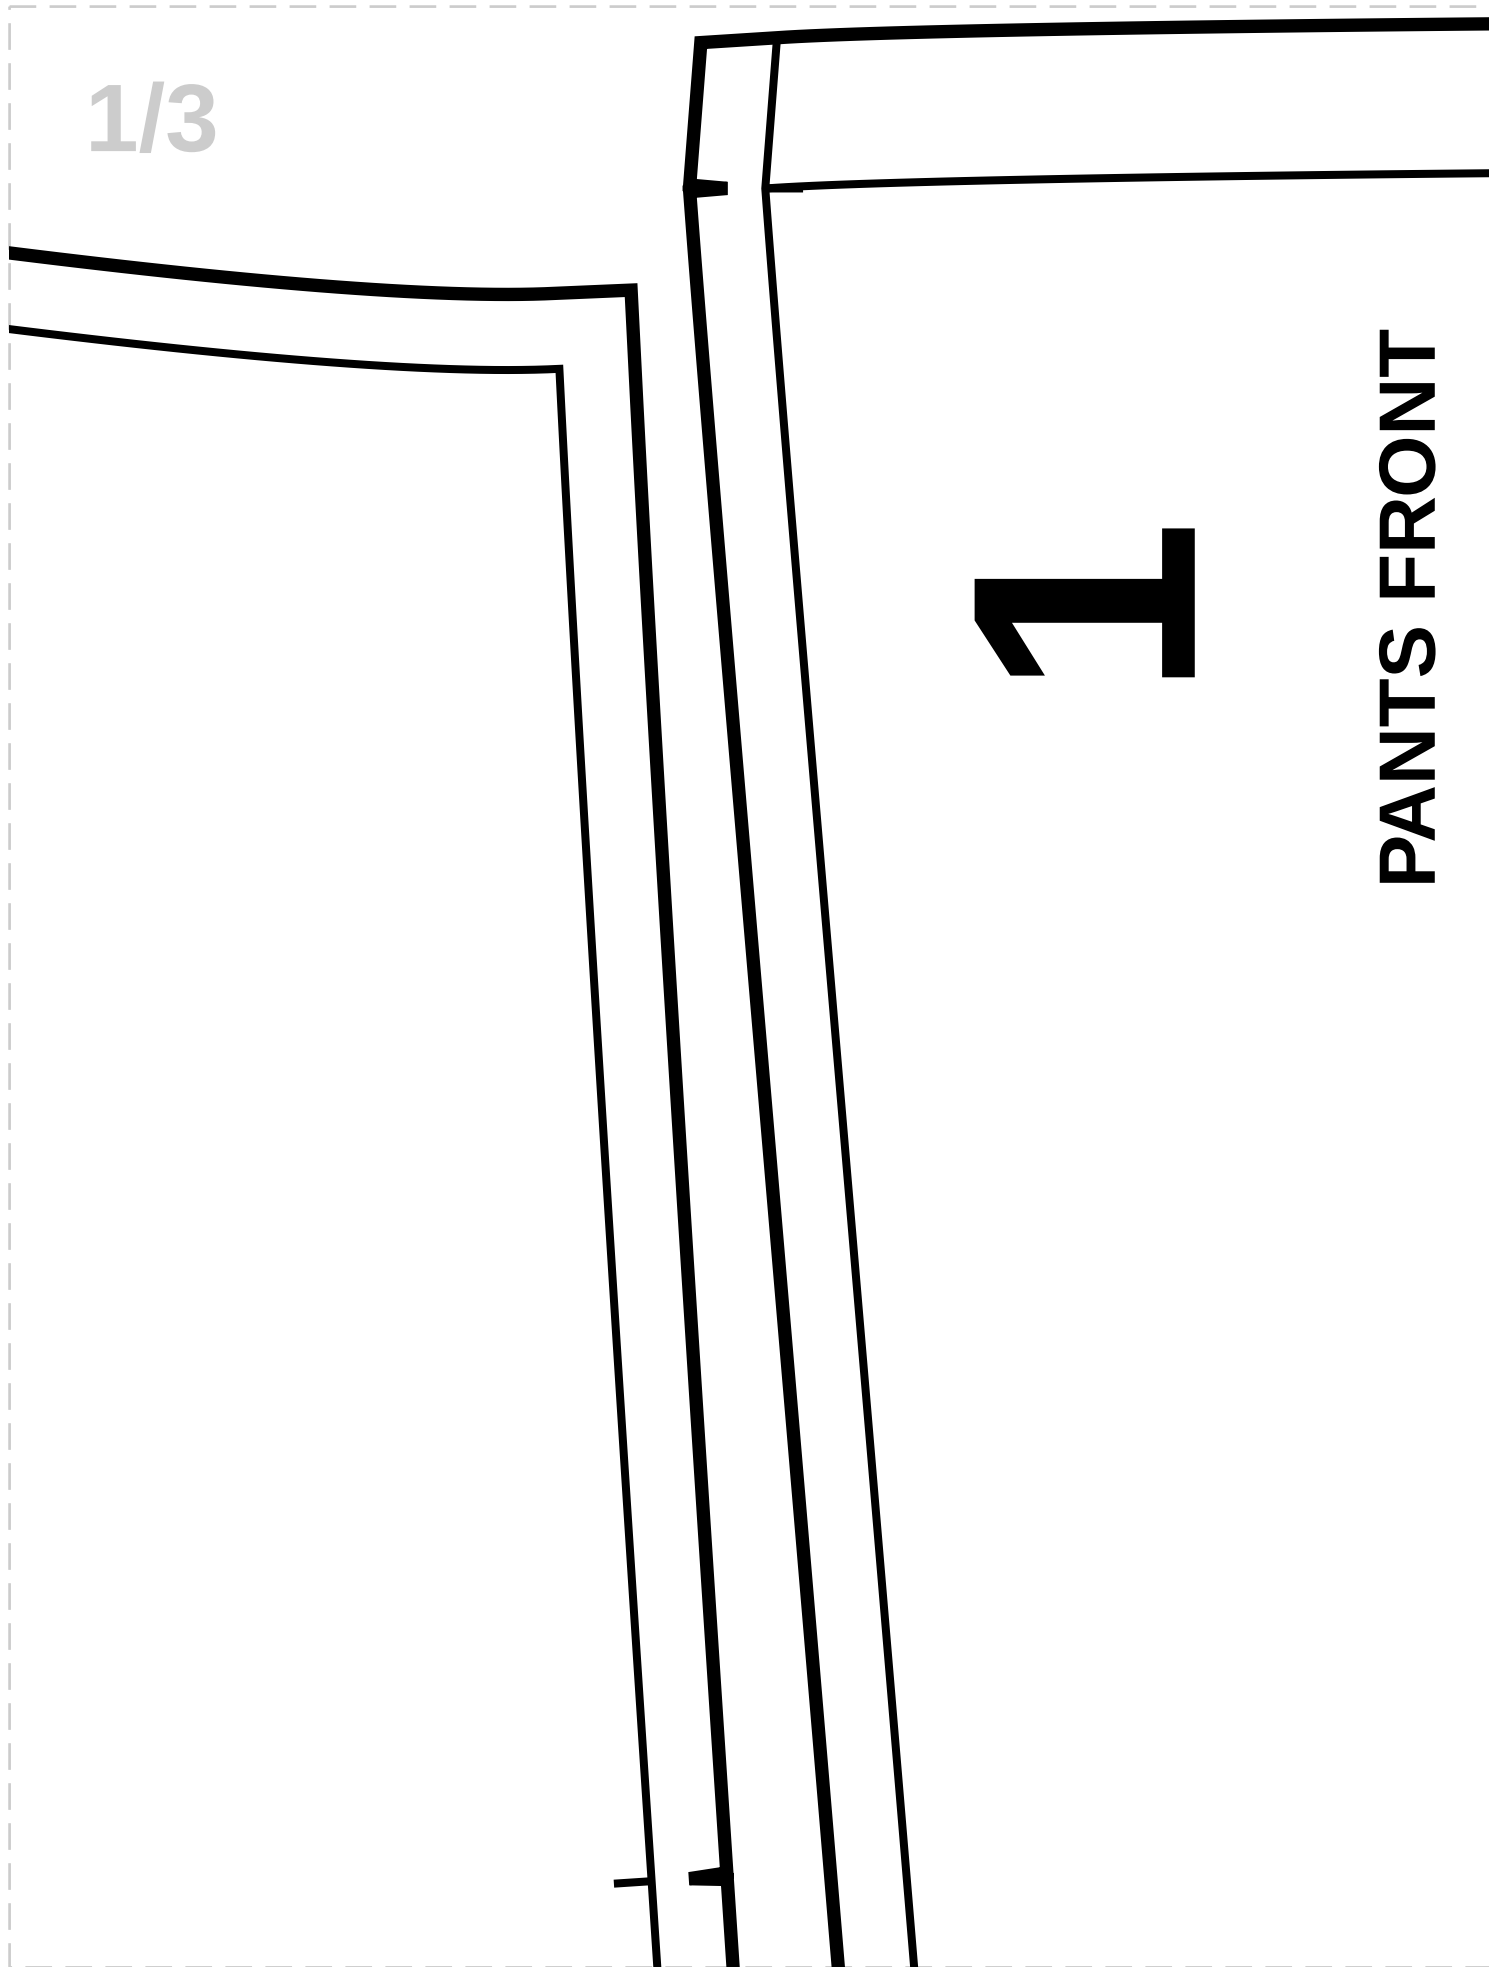

1/4

MAIN FABRIC: Cut 2




1/5

1/6


1/7

2/1

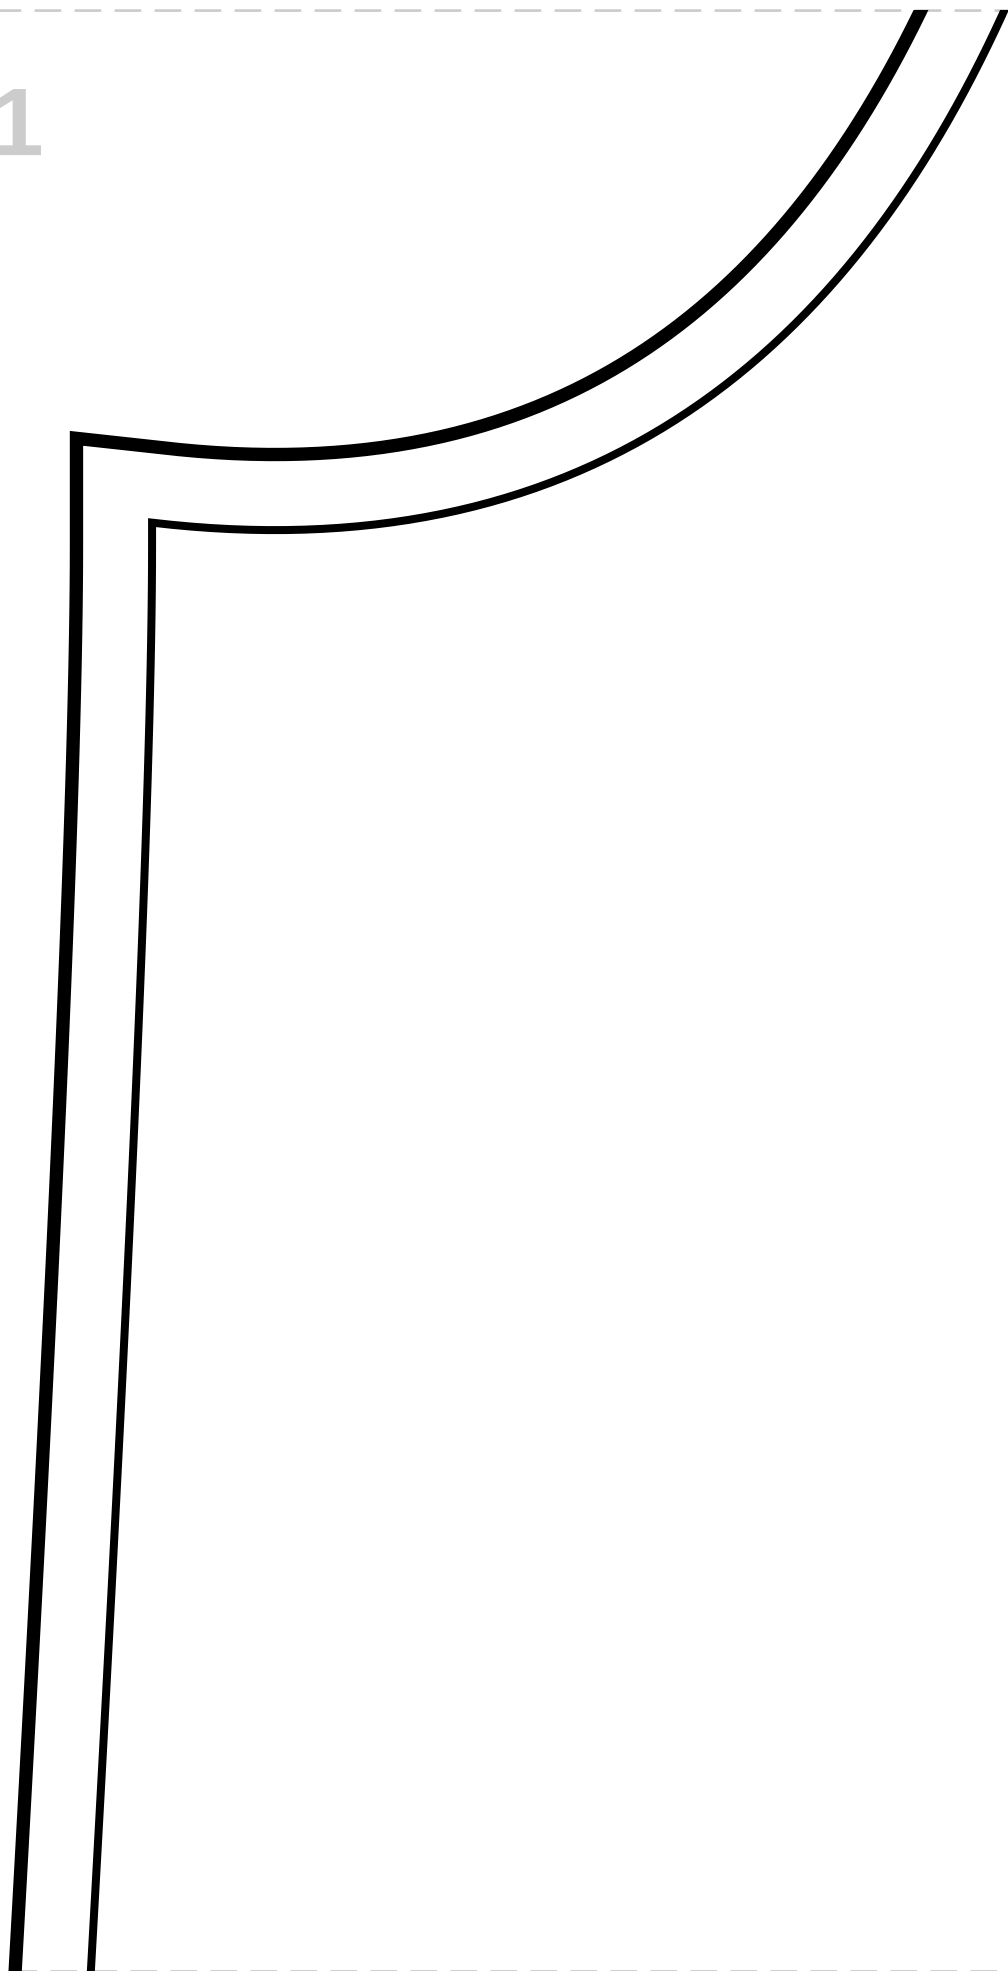


2/2

2/3

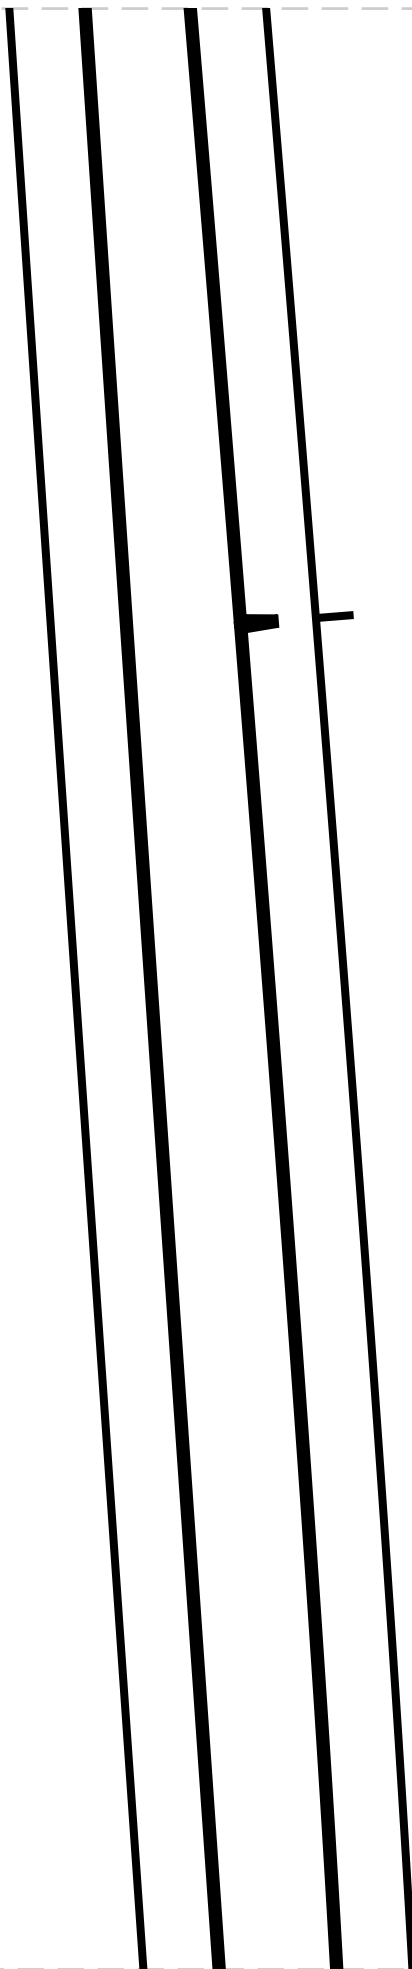

2/4

2/5

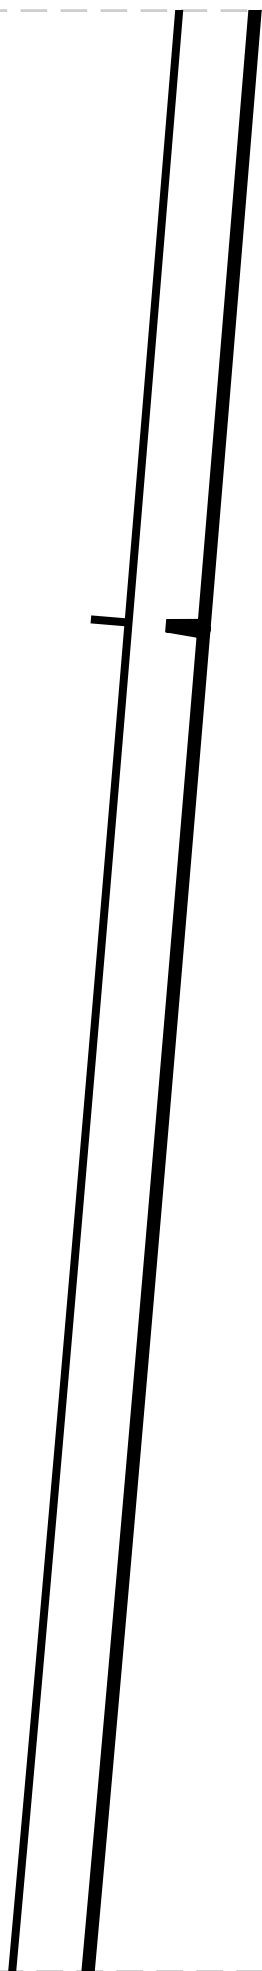

2/6

2/7

3/1


1

2

3/2




3/3

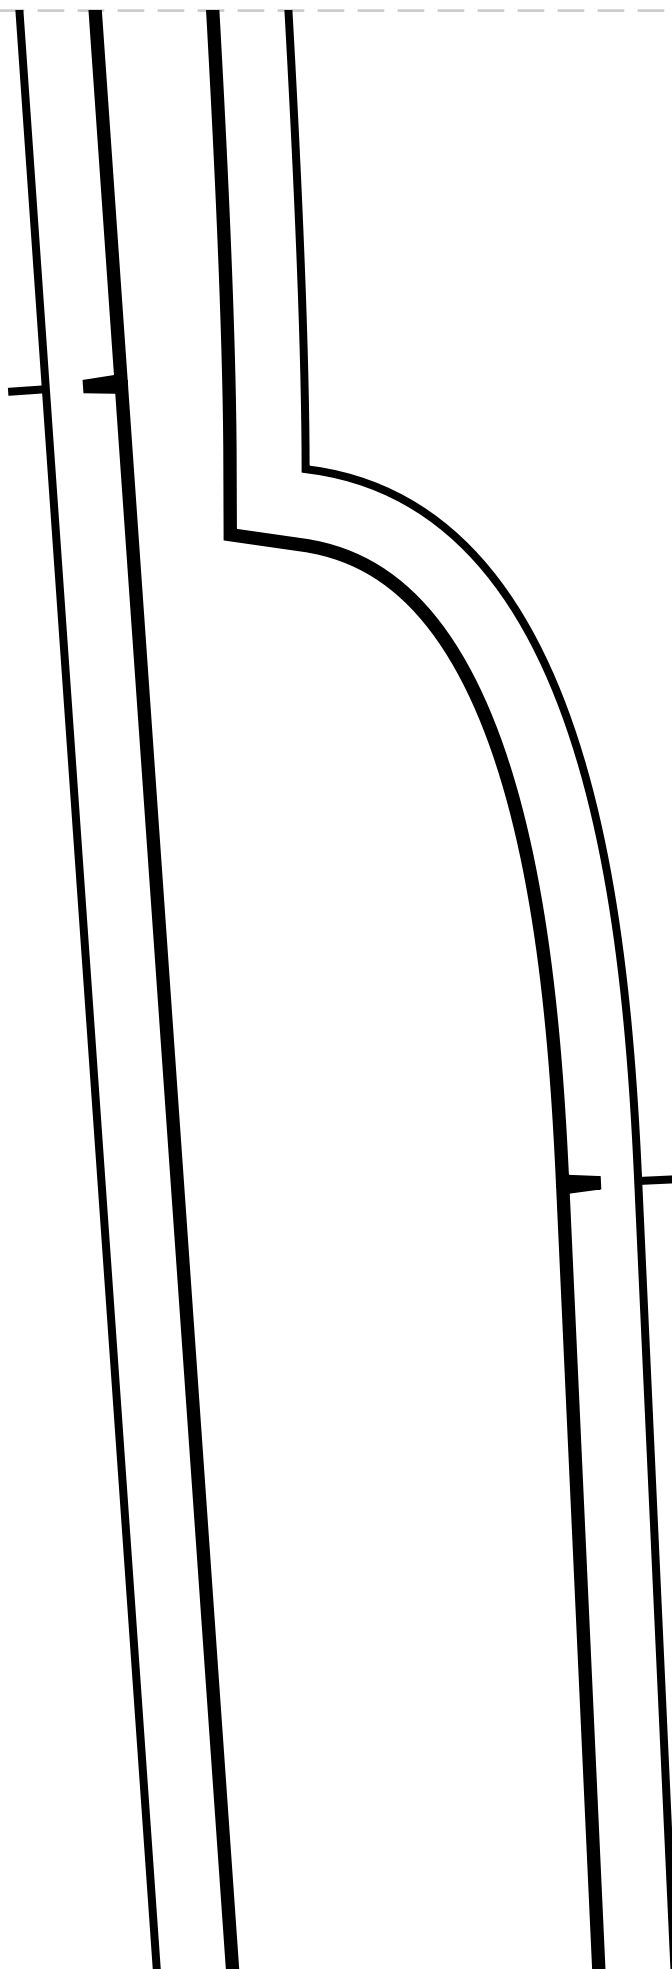

3/4



3/5

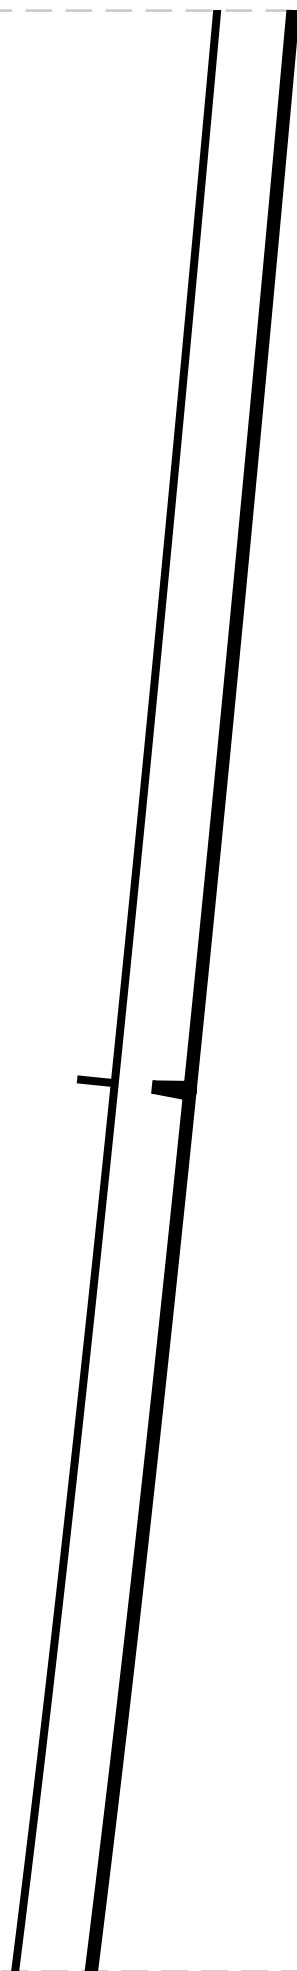

3/6

3/7


4/1

3


SIDE SEAM

WAISTBAND
MAIN FABRIC: cut 1

4/2

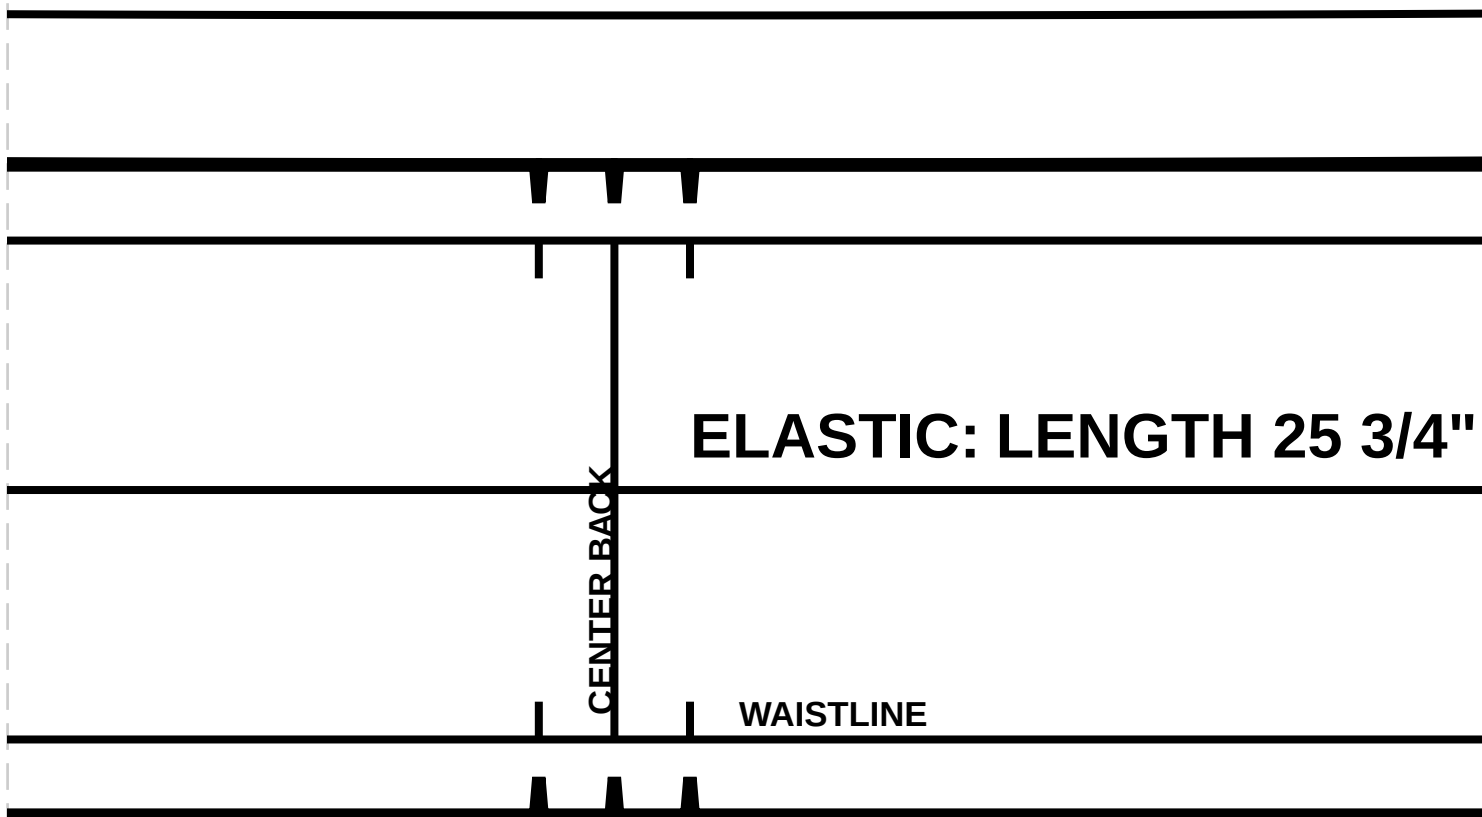

4/3

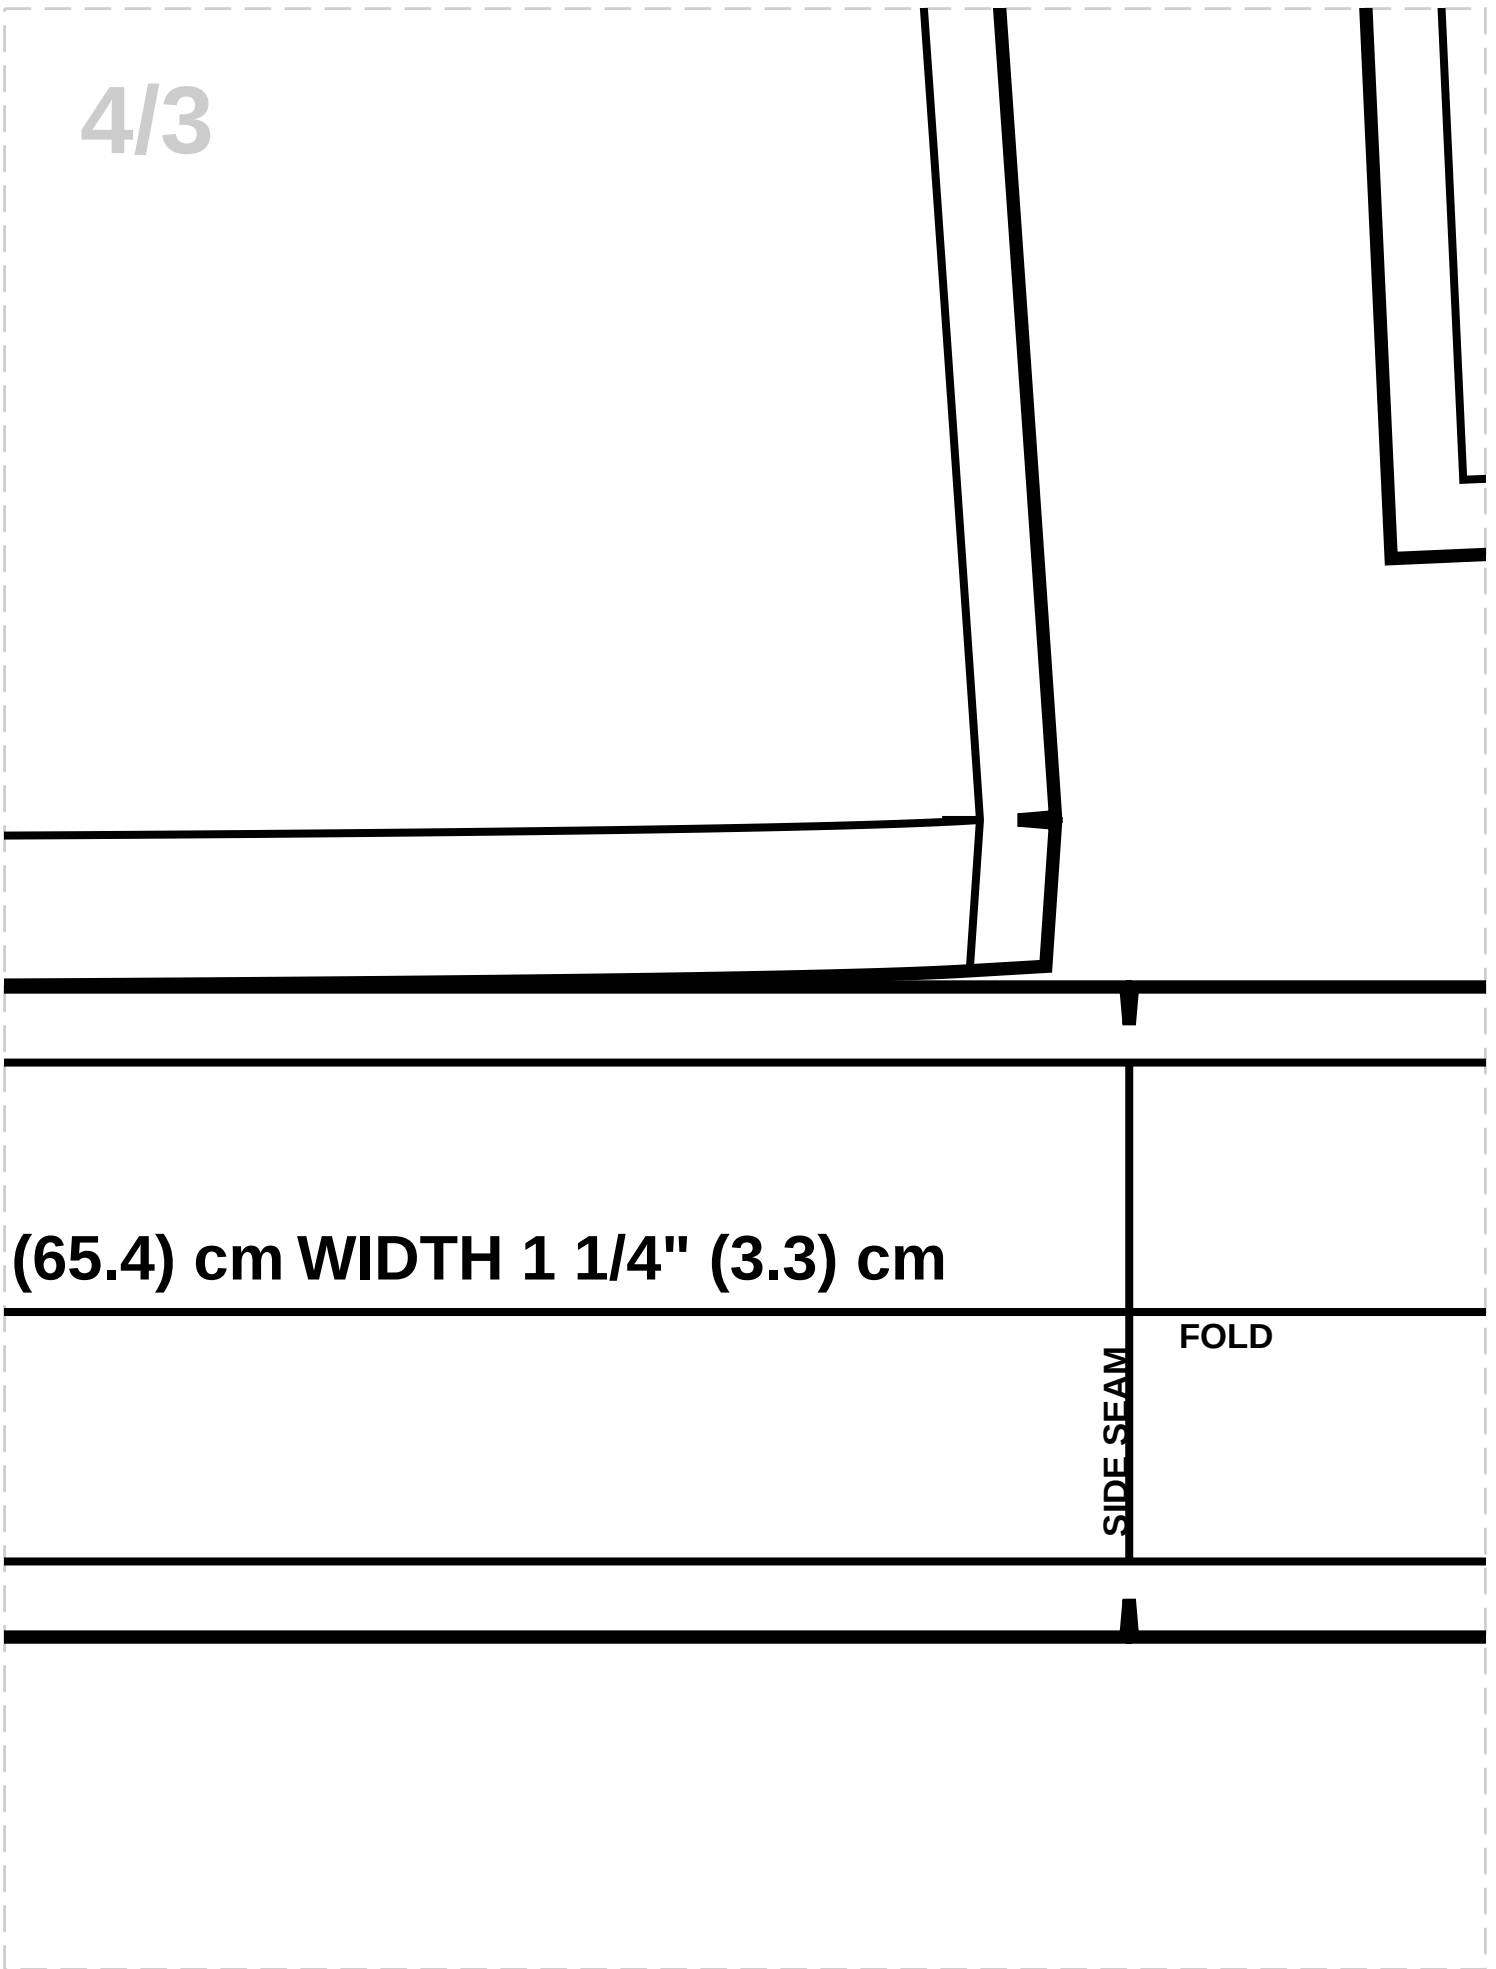


(65.4) cm WIDTH 1 1/4" (3.3) cm

SIDE SEAM

FOLD

4/4

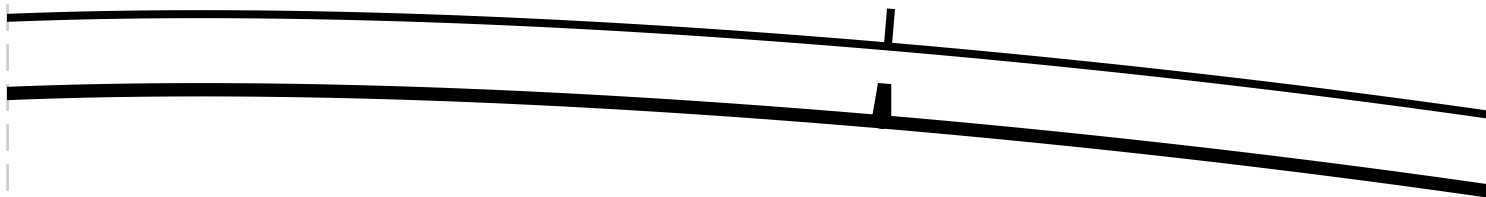


+

CENTER FRONT




4/5

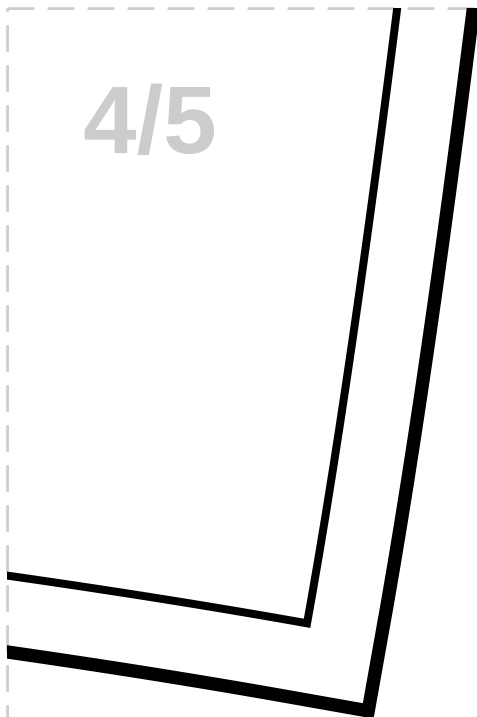

WAISTLINE



4/6

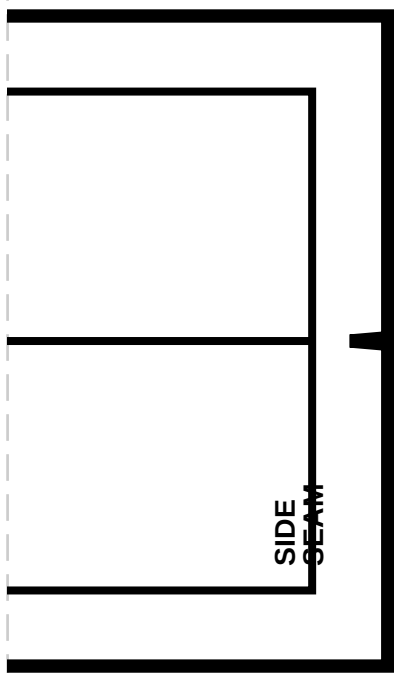

4/7